

Factory of Rolling Bearings and Cardan Shafts

Industrijska zona bb
21235 Temerin
SERBIA

Sales Director +381 21 6841 222
Head of Sales +381 21 6841 190

Sales Managers +381 21 6841 205
(Foreign Markets) +381 21 6841 231
+381 21 6841 188
(Domestic Market) +381 21 6841 187

Marketing +381 21 6841 201

www.fkl-serbia.com

sales@fkl-serbia.com

prodaja@fkl-serbia.com

marketing@fkl-serbia.com



Edition
2023





Your partner for

Providing the Best Solutions

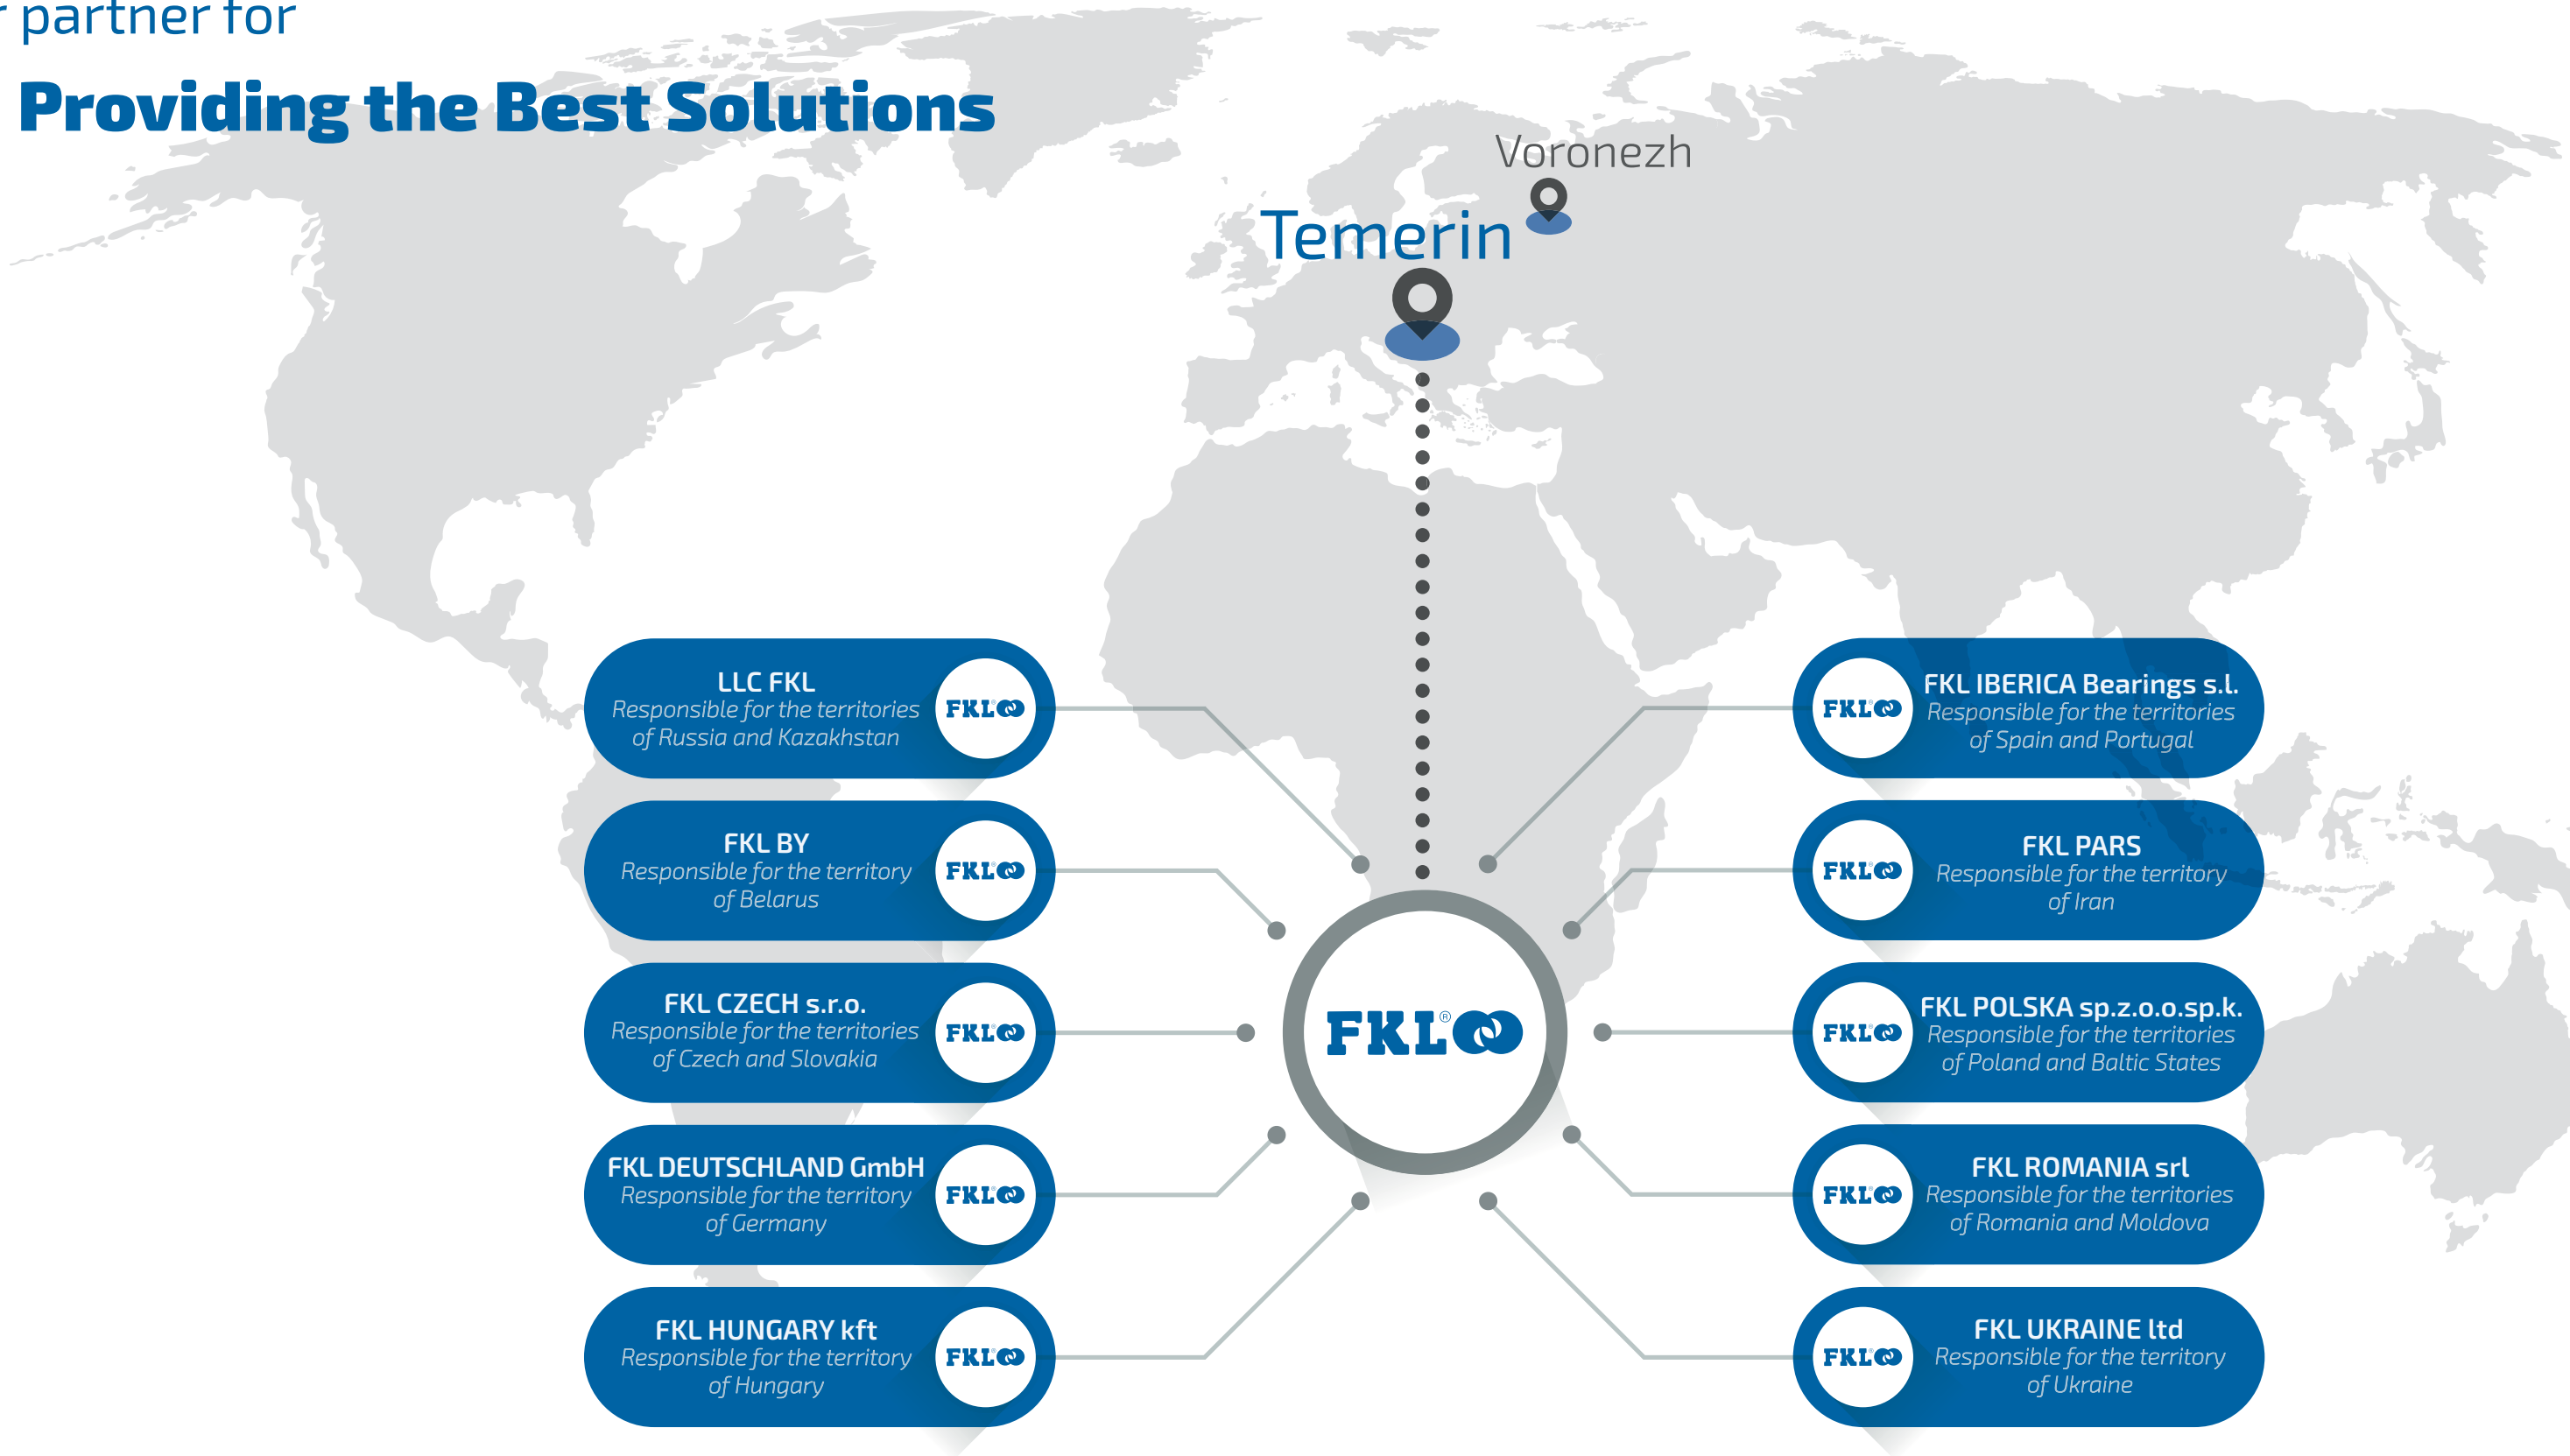




Table of CONTENTS

1. Product information

1.1. Introduction..... 10

1.2. Sealing..... 11

1.3. Lubrication 13

1.4. Materials 15

2. Installation

2.1. Shaft Tolerance and Speed Limit Number..... 18

2.2. Tightening..... 19

3. Y Program

3.1. Y-Program advantages 22

3.2. Y-Program Designation System..... 22

3.3. Cross References 23

3.4. Y-Bearing Units..... 24

3.5. Y-Ball Bearings 26

3.6. Ball Bearings with Inch Bore 27

4. Y-Bearings Data

4.1. Y-Ball Bearings with Grub Screw Locking (UE) 30

4.2. Y-Ball Bearings with Grub Screw Locking (LE) 32

4.3. Y-Ball Bearings with Eccentric Locking Collar (UY) 34

4.4. Y-Ball Bearings with Eccentric Locking Collar (LY) 36

4.5. Y-Ball Bearings with Integral Adapter Sleeve (UH)..... 38

4.6. Y-Ball Bearings with Extended Standard Inner Ring (LS)..... 40

4.7. Y-Ball Bearings with Extended Standard Inner Ring (LN)..... 41

4.8. Y-Ball Bearings with Standard Inner Ring (US) 42

4.9. Y-Ball Bearings with Tapered Bore

 Y-Ball Bearings with Adapter Sleeve (LK)..... 43

4.10. Y-Ball Bearings with Tapered Bore (UK)..... 44

4.11. Y-Ball Bearings with Standard Inner Ring (172) 45

5. Angular Contact Ball Bearing - Double Row..... 47

6. Y-Bearing Units Data

6.1. Y-Bearing Plummer Block Units with Grey Cast Iron Housing "S" 50

6.2. Y-Bearing Plummer Block Units with Grey Cast Iron Housing "V" 52

6.3. Y-Bearing Plummer Block Units with Grey Cast Iron Housing "U" 54

6.4. Y-Bearing Flanged Units with Square Grey Cast Iron Housing "F" 56

6.5. Y-Bearing Flanged Units with Oval Grey Cast Iron Housing "N" 58

6.6. Y-Bearing Flanged Units with Round Grey Cast Iron Housing "G" 60

6.7. Y-Bearing Flanged Units with Round Grey Cast Iron Housing "GS" 62

6.8. Y-Bearing Take - Up Units with Grey Cast Iron Housings "T" 64

6.9. Y-Bearing Flanged Units with Round Pressed Steel Housing "C" 66

6.10. Y-Bearing Flanged Units with Triangular Pressed Steel Housing "D" 68

6.11. Y-Bearing Flanged Units with Oval Pressed Steel Housing "P" 69

7. Agricultural Bearing Units - Special Solutions

7.1. Bearing Units Type 2TB..... 72

7.2. Bearing Units Type 2TC and 2PC..... 73

7.3. ARMOR Bearing Unit 74

8. Agricultural Bearings and Bearing Units

8.1. Agricultural Bearings

 8.1.1. Round and Square Bore Series with Spherical Outer Ring - Non-Relubricable Type..... 78

 8.1.2. Round and Square Bore Series with Cylindrical Outer Ring - Non-Relubricable Type..... 80

 8.1.3. Round Bore Series with Spherical and Cylindrical Outer Ring - Relubricable Type..... 82

 8.1.4. Square Bore Series with Spherical and Cylindrical Outer Ring - Relubricable Type..... 84

 8.1.5. Hexagonal Bore Series with Spherical and Cylindrical Outer Ring... 86

8.2. Agricultural Bearing Units

 8.2.1. Square Series 88

 8.2.2. Round Series 90

8.3. Agricultural Bearings and Bearing Units Overview 91

9. Disc Harrow Bearings, Bearing Units and Hubs

9.1. Disc Harrow Bearings and Bearing Units – Independent Discs 94

9.2. Integrated Hubs 95

10. Index Label 97

11. Production Program..... 98

12. FKL Distributors 100

Factory of Rolling Bearings and Cardan Shafts

FKL DOO Temerin is producer of rolling bearings and cardan shafts with tradition in production since 1961. Factory is located in Serbia at area covering 17 hectares. Production zone consists of two production plants in total area of 25.000 m².

With strong focus on the agriculture industry, FKL develops and produces a comprehensive range of solutions for disc harrows, seeding machines, packer rollers, packer ballers, combines as well for the other types of agriculture machinery. By using of advanced lab and field tests FKL can guarantee that every single product is designed to operate from mild to harsh working conditions. FKL's highly skilled technical team is ready to meet all customer demands in order to provide them the most appropriate bearing solution.

Today FKL is being recognized as a high-quality bearing manufacturer all around the world with more than 200 OEM (Original Equipment Manufacturing) references and with spreaded Distribution sales network worldwide.



Mission

Providing the best solutions and the highest level of service through continuous process of learning and improving.

Vision

Leading European manufacturer of premium quality bearings and bearing units for agricultural application.

Our quality has been built on:

- High quality raw material
- Own R&D department
- Highly productive and modernized equipment
- Qualified personnel

ISO 9001



ISO 14001



ISO 45001




FKL DOO Temerin has an **accredited laboratory** for product testing



Product Information

1.1. Introduction	10
1.2. Sealing	11
1.3. Lubrication	13
1.4. Materials.....	15

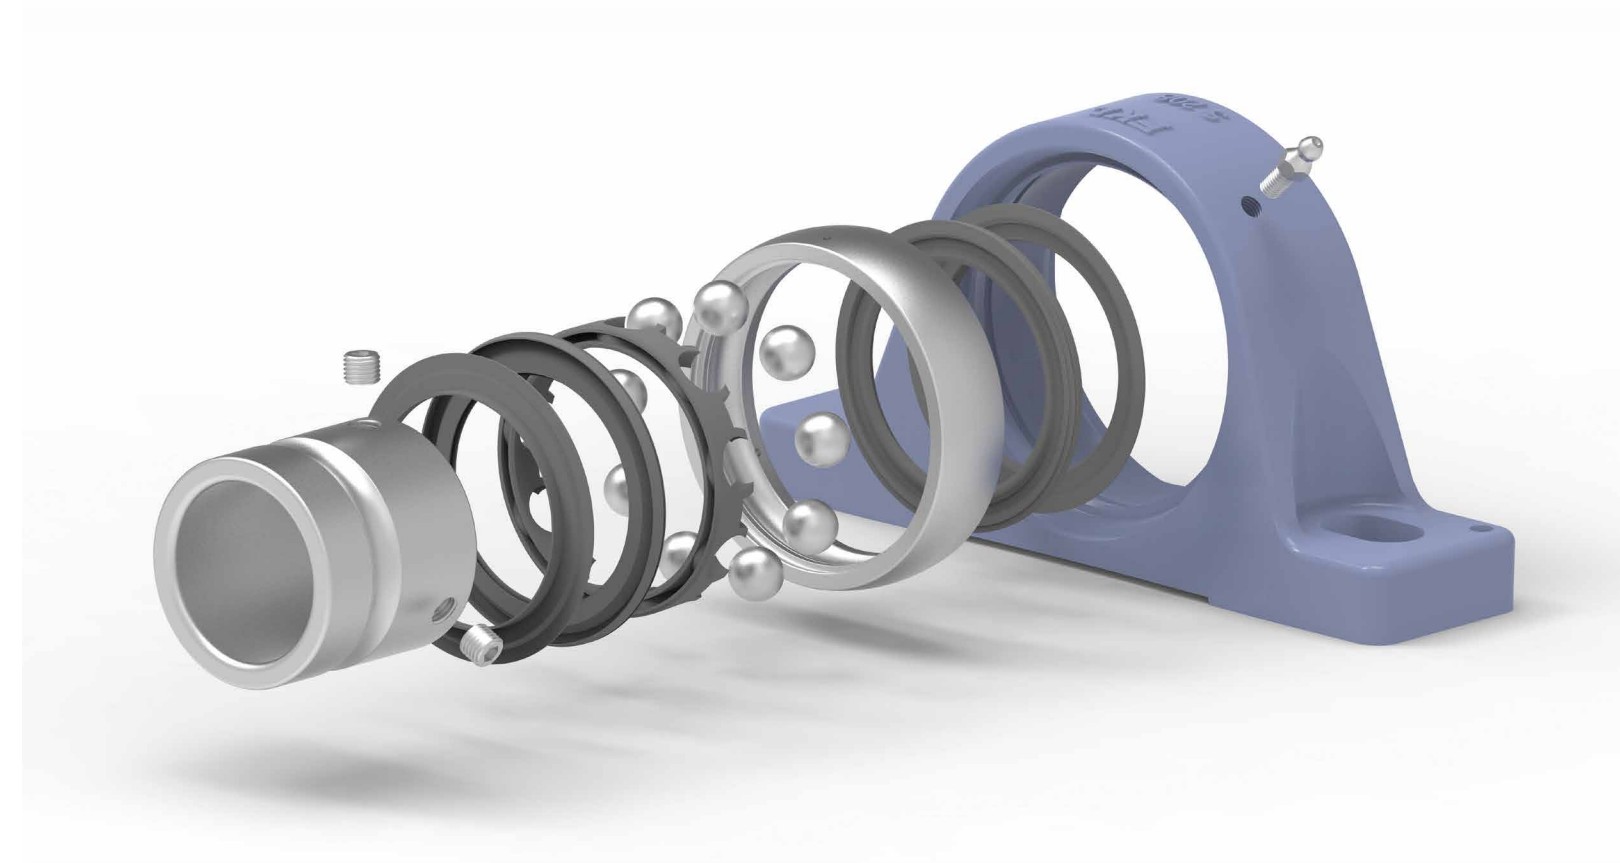

1. Product Information

1.1. Introduction

This catalog is prepared in order to present all important information about the products and their characteristics in "easy to find" manner.

Whether looking for the particular product, or solution to the specific problem, this catalog represents the choice of most frequent FKL ball bearings and bearing units. This is selection of products that have steady demand, used in a wide range of applications. Our users are familiar with benefits of FKL products. This catalog is primarily designed for end users, so the technical data are reduced to a minimum.

The catalog of ball bearings and bearing units includes designations and principal dimensions for all types of bearings and bearing units that are used to a greater or lesser extent. The catalog also includes an overview of basic production program with comparative designation. The basic designation defines the type of the bearing, size series and the diameter of the bore by the defined order. Suffixes that appear in this catalog and ones that are frequently used are listed and explained in a specified table. Designations of housings follow similar designation system and can be found in the catalog as well. Other European and worldwide producers that are not included in this catalog have similar comparative designations. Additional designations are also specified as well as other necessary explanations.

Technology utilized for the production of the bearings provides significant advantages to customers due to minimal maintenance costs. Each bearing should have longer life span and should operate without any problems during the exploitation. However, it should be noted

that certain external factors affect the quality of bearings as well. They should not be exposed to excessive heat and must be protected from ingress of foreign matter. Also, bearings must be properly lubricated.

This catalog presents bearings designed for agricultural equipment like combine harvesters, harrows, mowers, sugar beet harvesters,... Development of the agricultural industry is followed by development of the cultivation and harvesting machinery. Each stage of cultivation requires special machinery that is either self-propelled or tractor driven, depending on operating conditions. Earlier generations of the machines were equipped with bearings that worked at lower speeds and supported lighter loads.

Modern ball bearings stand up to growing demands of operation in difficult conditions with increased productivity.

Further development trends set demands for longer exploitation life under harsh conditions and more cost-effective design for agricultural machinery. Y-bearings provide cost-effective solutions. They are extensively applied in agricultural machinery production as well industrial production. These bearings are quick and easy to mount. Wide inner ring can be mounted on the shaft by the eccentric ring, screws or adapter sleeves. Seals are specially designed and fitted to the outer ring. The advantages of these bearings have led to their rapid adoption by manufacturers of agricultural machinery.

Each FKL bearing is produced in accordance with strict premium quality standards.

1.2. Sealing

FKL offers economical and space-saving sealing solutions. Bearings can have shields and/or seals at one or both sides. Bearings that are sealed at both sides can be re-lubricating or maintenance-free. Sealed bearings are generally used where sufficiently effective external sealing cannot be provided due to inadequate space or cost effectiveness. Bearings fitted with shields are used where the possibility of impurity ingress is low and there is no danger of water or steam contact with the bearings or where high speed or operating temperature of the bearings is required. Bearings fitted with contact seals are preferred to be used where contamination is moderate and where moisture, water, steam may occur or where a long exploitation life without maintenance is required.

Bearing sealing




Fig. 1 Sealing 2Z

Non-contact sealing with Steel sheet shield of simple and cheap make. Grease prevents penetration of rough impurities. Allows the highest speeds. It is used with the deep groove ball bearings.




Fig. 2 Sealing 2RS

The older type of the single seal. Prevents penetration of soil, dust and water and since exposed to the impact of abrasive particles is expendable more than some new types of seals. Due to extended friction, the permitted speeds are lower. It was gradually replaced with the improved versions of (2S). Because of the traditional reasons Y bearings with this kind of seal do not have the additional sealing mark. It is used with the Y-bearings and deep groove ball bearings.




Fig. 3 Sealing 2S

Single seal with the labyrinth between the sheet part and the rubber lip which conducts the contact sealing. The friction and speeds are the same as with 2RS but provides much better protection against the rough impurity particles. This is very good sealing system: the sheet part protects the seal from the soil, dust and rough particles. At the same time makes the labyrinth with the rubber part. The rubber part provides contact sealing which prevents penetration of finer impurities, water, moisture, steam etc. Suitable for neutral conditions because of the presence of the foreign materials. It is used with the Y bearing (standard) and deep groove ball bearings.




Fig. 4 Sealing 2F

Dual sealing, protection cover placed on the inner ring protects against rough impurity particles and makes the labyrinth with the sheet part of the seal; then the sealing 2S type, with the labyrinth between the sheet part and the rubber lip that conducts the contact sealing. The friction and speeds are the same as with 2S but has much better protection against rough impurity particles. It is very good sealing system: the sheet part protects the seal from the soil, dust and rough particles. At the same time makes the labyrinth with the rubber part. The rubber part provides the contact sealing that prevents the penetration of the finer impurities, water, moisture, steam etc. Suitable for heavier conditions due to better protection against foreign matters. It is used with the Y bearings (standard).




Fig. 5 Sealing 2T

By construction is the same as 2S, except rubber lip is tripled. Therefore, it seals better but has even larger friction. The permitted speeds are much lower, up to 500 rpm. It emerges out of external ring width and is applied only with special bearings for the agricultural machines (practically standard sealing for the disc harrow bearings) and to the less extent, Y-bearing program (delivery is made according to special request). Additional protection provided by metal-sheet cap is also available (designation 2TC).




Fig. 6 Sealing 2TB

Dual sealing, combination 2T and stronger protection steel. Friction and speeds are the same as 2T, but considerably better protection against rough dirt. This type of sealing is applied in agricultural machinery. Protection steel protects from soil, dust, rough dirt and mechanical impact on the seal. Triple-lips seal performs contact sealing that prevents penetration of finer dirt, water, damp etc. Suitable for difficult working conditions with aggressive presence of foreign matter. Used with Y bearing units 2TB.




Fig. 7 Sealing 2P

By construction is the similar as 2T, except rubber lip is fivefold. Therefore, it seals better but has even larger friction. The permitted speeds are much lower, up to 500 rpm. It emerges out of external ring width and is applied only with special bearings for the agricultural machines (practically standard sealing for the disc harrow bearings) and to the less extent, Y - bearing program (delivery is made according to special request). Additional protection provided by metal-sheet cap is also available (designation 2PC).




Fig. 8 Sealing 2PB

Dual sealing, combination 2P and stronger protection steel. Friction and speeds are the same as 2P, but considerably better protection against rough dirt. This type of sealing is applied in agricultural machinery. Protection steel protects from soil, dust, rough dirt and mechanical impact on the seal. Five lip seal performs contact sealing that prevents penetration of finer dirt, water, damp etc. Suitable for difficult working conditions with aggressive presence of foreign matter. Used with Y bearing units according to special request.




Fig. 9 Sealing TDT

Additional metal cover with thickness of 1 mm provides reliable mechanical protection. Unique combination of six-lip sealing, double 3 lip sealing protects bearing from the outer side, one 3 lip sealing protects bearing from inner side. This presents today the best sealing system for application in agricultural machinery.




Fig. 10 Dirtblock Sealing

Designed for hard working condition at unfriendly environment. Half metal - half rubber outside diameter provides reliable seal retention in the bore and improves sealing performance. Inside diameter is covered by rubber and improves sealing performance and easy installation. This sealing provides maximum protection against liquid or solid contaminants, which significantly extends bearing service life.

1.3. Lubrication

FKL bearings and bearing units with integral seals and shields at both sides are sufficiently greased for the lifetime and should not be lubricated, except when used in very harsh working conditions. Standard greases used by FKL DOO Temerin in those products have optimal temperature range and other characteristics suitable for the intended application areas. Filling grades correspond to the bearing size. Relubrication is possible with Y bearings and bearing units supplied with lubricators and corresponding grease channels. FKL DOO Temerin sealed bearings are filled with lithium-grease consistency 2 and cinematic viscosity of basic, mineral oil around 90 mm²/s; temperature range of application ranges from -30 up to +120°C.

Grease lubrication

About 90% of all bearing arrangements are lubricated with grease. Grease has certain advantage comparing to oil because it is easier to retain in the bearing arrangement, particularly with inclined or vertical shafts, and also improves sealing the arrangement against contaminants, moisture or water. However, the shortcoming is lower speeds comparing to oil lubrication. With higher speed bearings, the excess lubricant would cause rapid rise of operating temperature. As a general rule, therefore only the bearing should be completely filled, whilst the free space in the housing should be greased between 30 and 50%. Where the bearings are to operate at very low speed and must be well protected against corrosion, it is advisable to completely fill the housing with grease.

Lubricating greases

Lubricating greases consist of mineral or synthetic oil combined with a thickener. The thickeners are usually metallic soaps. Additives can also be included to enhance certain characteristics of the grease. The consistency of the grease depends largely on the type and concentration of used thickener. When selecting grease, the viscosity of the base oil, the consistency, operating temperature range and the load carrying ability are the most important factors to be considered.

Base oil viscosity

The base oil viscosity of the greases normally used for rolling bearings lies between 15 and 500 mm²/s at 40°C. Greases based on oils having higher viscosities than 1000 mm²/s at 40°C bleed oil so slowly that the bearing will not be adequately lubricated. Therefore, if a very high viscosity is required because of low speeds, oil lubrication will generally be found more reliable. The base oil viscosity also governs the maximum permissible speed at which given grease can be

used for bearing lubrication. For applications operating at very high speeds, the most suitable greases are those incorporating diester oils of low viscosity. The permissible operating speed for grease is also influenced by the shear strength of the grease, which is determined by the thickener. "A" is speed factor $A = n \times d_m$ is often quoted by grease manufacturers to indicate the speed capability; "n" is the rotational speed and "dm" is the bearing mean diameter - $d_m = 0,5 (d + D)$.

Consistency

Greases are divided into various consistency classes (DIN 51 818), according to the National Lubricating Grease Institute (NLGI) Scale. The consistency of greases used for bearing lubrication should not change unduly according to temperature within the operating temperature range or due to mechanical operation. Greases that soften at elevated temperatures may leak from the bearing arrangement. Those that stiffen at low temperatures may restrict rotation of the bearing. Metallic soap thickened greases of consistency 1, 2 or 3 are those normally used for rolling bearings. The consistency 3 greases are primarily recommended for bearing arrangements with vertical shafts.

Protection against corrosion

The grease rust inhibiting characteristics are mainly determined by the rust inhibitors which are added to the grease and its thickener. Grease should provide protection to the bearing against corrosion and should not be washed out of the bearing in case of water penetration. These two features are possessed by lithium and calcium based greases containing lead base additives. However, because of environmental and health reasons such additives are being replaced by other combinations of additives which do not always provide lubricant with such good features.

Load carrying ability

For heavily loaded bearings, e.g. rolling mill bearings, it has been accustomed to recommend the use of greases containing EP additives, since those additives increase the load carrying ability of the lubricant film. Originally, most EP additives were lead-based compounds and there were arguments suggesting benefits in bearing life extension where lubrication was otherwise poor without elastic-hydrodynamic lubricant film.

Miscibility

Some greases are incompatible and if mixed together the consistency can change dramatically as well as allowed operating temperature. Greases having the same thickener and similar base oils can generally be mixed without any consequences. Lithium and calcium base greases are generally miscible with each other but not with sodium base greases. However, mixtures of compatible greases may have a consistency which is less than either of the component greases, although the lubricating characteristics are not necessarily impaired. In bearing arrangements where a low consistency might lead to grease leakage from the arrangement, the next relubrication should involve complete replacement of the grease rather than replenishment.

Relubrication

Rolling bearings have to be relubricated if the operating life of the used grease is shorter than the expected life span of the bearing. Relubrication should be performed while lubrication of the bearing is still satisfactory. The time at which relubrication should be undertaken depends on many factors which are related in a complex manner. Those include bearing type and size, speed, operating temperature, grease type, space around the bearing and the bearing environment. The following information is based on long-term tests in various applications but does not apply to applications where water and/or solid contaminants can penetrate the bearing arrangement. In such cases it is recommended that the grease is frequently renewed in order to remove contaminants from the bearing.

Relubrication intervals

Relubrication intervals t_l , for normal operating conditions can be calculated as a function of bearing speed n and bore diameter d of a certain bearing type from Diagram 1. The diagram is valid for bearings on horizontal shafts in stationary machines under normal loads. It applies to good quality lithium base greases at a temperature not exceeding 70°C. To calculate accelerated ageing of grease due to increased temperature it is recommended to split intervals obtained from the diagram by half for every 15°C increase in bearing temperature above 70°C. The intervals may be extended at temperatures lower than 70°C but as operating temperatures decrease the grease will bleed oil less readily and with lower temperatures the extension of intervals by more than two times is not recommended. For bearings on vertical shafts the intervals obtained from the diagram (t_l) should be halved. For large roller bearings having d of 300 mm and above, the high specific loads in the bearing mean that adequate lubrication will be obtained if the bearing is more frequently relubricated than indicated by the diagram, and the lines are therefore

broken. It is recommended in such cases when continuous lubrication is practiced for technical and economic reasons. The grease quantity to be supplied can be obtained from the equation below:

$$G_k = (0,3 \div 0,5) D \times B \times 10^{-4}$$

where:

G_k - grease quantity to be continuously supplied, g/h

D - bearing outside diameter, mm

B - total bearing width (for thrust bearings use total height H), mm

Relubrication procedures

One of the two procedures described below should be used, depending on the relubrication interval t_l obtained:

1. If the relubrication interval is shorter than 6 months, then it is recommended that the grease filling the bearing arrangement should be replenished (topped up) at intervals corresponding to 0,5 t_l , the complete grease fill should be replaced after three replenishments, at the latest. Suitable quantities for replenishment can be obtained from:

$$G_p = 0,005 \times D \times B$$

where:

G_p - grease quantity to be added when replenishing, g

D - bearing outside diameter, mm

B - total bearing width (for thrust bearings use total height H), mm

2. When lubrication intervals are longer than 6 months it is recommended that all used grease should be removed from the bearing arrangement and replaced by fresh grease.

All these are rough guidelines if there are no specific recommendations by the manufacturer or maintenance service. To facilitate the supply of grease using a grease gun, a grease nipple should be provided on the housing. It is also necessary to provide an exit hole for the grease so that excessive amounts would not build up in the bearing surrounding space. Otherwise it might cause permanent increase in the bearing temperature.

However, as soon as the appropriate temperature is reached after relubrication, the exit hole should be plugged or clogged so the oil bled by the grease could remain at the bearing position. The danger of excess grease collection in the space surrounding the bearing, causing temperature peaking with its detrimental effect on the grease as well as the bearing, is most emphasized when bearing

operates at high speeds. In such cases it is advisable to use a grease discharge valve rather than an exit hole. A grease discharge valve consists basically of a disc which rotates with the shaft and forms a narrow gap with the housing end cover. Excess and used grease is thrown out by the disc into an annular cavity and leaves the housing through an opening on the bottom side of the end cover. To ensure the fresh grease actually reaches the bearing and replaces the old grease, lubrication duct in the housing should either feed the grease adjacent to the outer ringside face or, into the bearing tracks. In general, one

should pay attention to grease density and that it does not remain within the bearing.

Bearing storage

When bearings are stored in their original packaging, they are corrosion protected for several years. Warehouse humidity should not exceed 60%. In case of sealed bearings, if kept in stock for a long period of time, grease may solidify so after the bearing is mounted, its friction moment is higher in comparison to new bearings. Therefore, this should be taken into consideration.

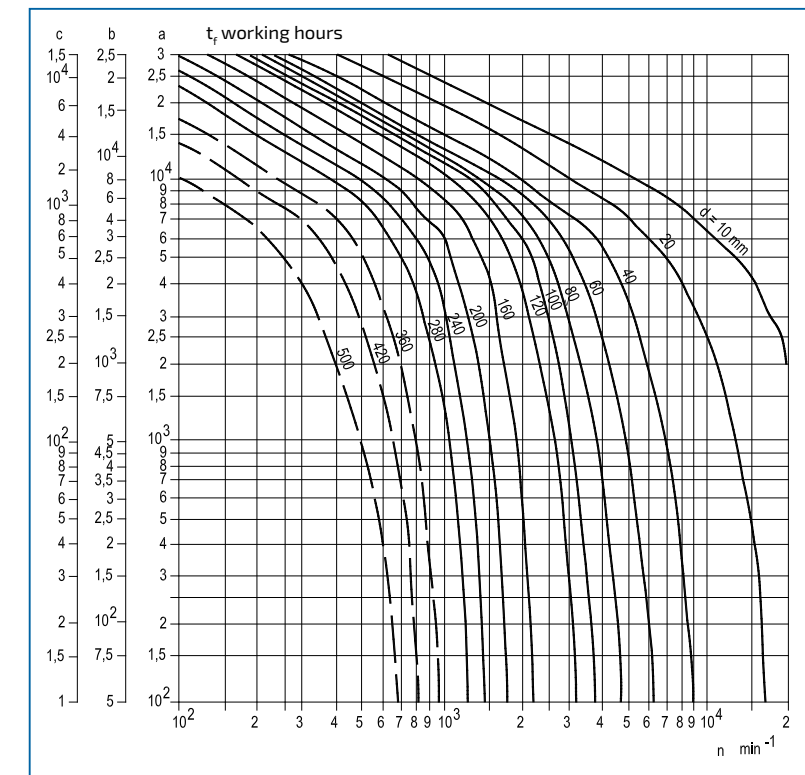


Diagram 1. Relubrication interval

Scale a: deep groove ball bearings

Scale b: cylindrical roller bearings, needle bearings

Scale c: spherical, taper roller bearings, thrust ball bearings

roller bearings – full complement (0,2 t_l),

cross-roller bearings with cage (0,3 t_l)

thrust roller, needle, spherical bearings (0,5 t_l)

1.4. Materials

The rings of the bearings and rolling elements are made of special steel (100Cr6 by ISO 683-17:2014) manufactured by the method of vacuum degasification. They are exposed to heat treatment to retain dimensions stability to 150°C. The cages for standard operating temperatures (-20 to +120°C) are made of plastic (ULTRAMID A4H, POLYAMIDE 66). The positive effects of POLYAMIDE, elasticity and small weight, are evident on the high impact bearing load and negative acceleration. The cages of POLYAMIDE possess very good sliding characteristics and steady operation.

The pressed cages are made out of steel sheet. Some massive cages are made of brass. The seals are rubber made (PERBUNAN, BUNA M) and vulcanized onto the sheet guard plate. They can operate in temperature range from -20 to +120°C. Flingers are made of steel sheet. The housings of the Y-bearings are made of cast iron, hardness 200 HB or cold-rolled steel sheet. Grease for common operation temperatures (between -20 and +120°C) is lithium base grease, consistency of the grease 2, viscosity at 40°C is 90 mm²/s.

Installation

2.1. Shaft Tolerance and Speed Limit Number.....	18
2.2. Tightening.....	19



2. Installation

2.1. Shaft Tolerance and Speed Limit Number

Speed ratings

Speed is limited by two factors:

1. By the shaft tolerance on which the bearing is mounted; as tighter fitting is more resistant to shock loads and vibrations and vice versa, fitting with greater clearance is sensitive to those influences and lower speed can be allowed. Recommendations for speed rating, depending on the shaft tolerance, are shown in the Table 1.

2. By the type of sealing because the friction between the sealing and bearing ring increases the operating temperature in proportion to the speed. For normal sealing 2S and 2F data are shown in the following table. For sealing 2B allowed speed is 55 - 60% from that given in the table.
For bearings with three-lip sealing 2T, 2TB and 2TC (bearings for agricultural machinery) allowed speed is max. 500 rpm unless it is lower according to the Table 1.

Bearing type →	UE, LE, UY, LY Shaft tolerances						LK	1726..., LS
	Shaft diameter d	m7, k7	h6	h7	h8	h9	h11	
	12	12000	9500	6000	4300	1500	950	- 14000
	15	12000	9500	6000	4300	1500	950	- 13000
	17	12000	9500	6000	4300	1500	950	- 12000
	20	10000	8500	5300	3800	1300	850	7000 10000
	25	9000	7000	4500	3200	1000	700	6300 10000
	30	7500	6300	4000	2800	900	630	5300 7500
	35	6300	5300	3400	2200	750	530	4800 6300
	40	5600	4800	3000	1900	670	480	4300 5600
	45	5300	4300	2600	1700	600	430	4000 5000
	50	4800	4000	2400	1600	560	400	3600 4800
	55	4300	3600	2000	1400	500	360	3400 -
	60	4000	3400	1900	1300	480	340	3000 -
	65	3600	3000	1700	1100	430	300	2600 -
	70	3300	2800	1600	1000	400	280	2400 -
	80	2800	2400	1400	900	360	240	2200 -
	90	2400	2000	1200	800	320	200	- -
	100	2200	1900	1100	750	300	190	- -
	120	1900	1700	900	600	250	160	- -

Table 1. Speed ratings for Y bearings

2.2. Tightening

Axial load carrying capacity

Tightening torques for grub screws locking the bearings on the shaft, as well as axial load capacity of shaft-bearing connections are shown in the Table 2.

Shaft diameter (mm)	up to 20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	100	120
Tightening torque (Nm)	4	5	6	12	12	12	23	23	23	23	23	23	23	23	23	23	23
Hook spanner (mm)	3	3	3	4	4	4	5	5	5	5	5	5	6	6	6	6	6
Axial load (kN)	2	3	4	5	6	8	9	10	12	14	14	15	16	16	16	16	16

Table 2. Axial load carrying capacity

Y-Program

- 3.1. Y-Program advantages..... 22
- 3.2. Y-Program Designation System 22
- 3.3. Cross References 23
- 3.4. Y-Bearing Units..... 24
- 3.5. Y-Ball Bearings..... 26
- 3.6. Ball Bearings with Inch Bore..... 27



3. Y-Program

Y-bearing units are designed to be used in a wide range of applications. They consist of insert ball bearing with spherical outer ring and iron cast or pressed steel housings with spherical internal surface.


Combination of spherical surfaces gives bearing unit possibility of self-aligning.

3.1. Y-Program advantages

- Self aligning
- Higher rated load capacity compared to standard bearing units
- Special sealing feature
- Easy mounting
- Secure fitting
- Bearing replaceability
- Available in Maintenance free version or Relubricatable version

3.2. Y-Program Designation System

LES 205-100 2F.X

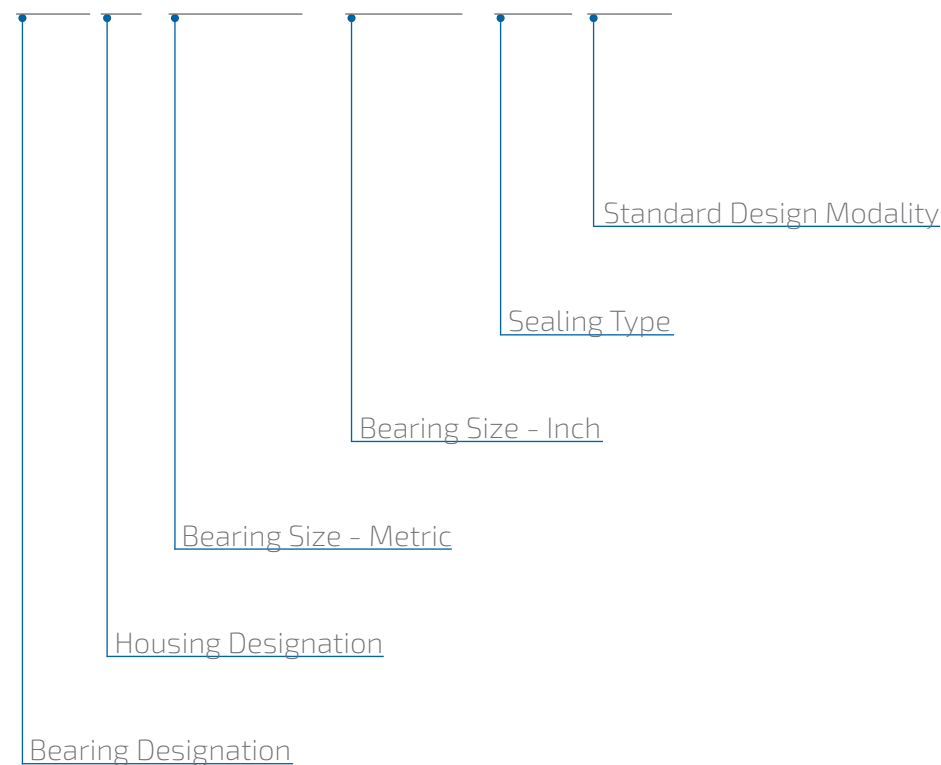

3.3. Cross References



[illegible]

3.4. Y-Bearing Units

				
S	V	U	F	N
203-204-205-206 207-208-209-210 211-212-213-214 215-216-218-220	204-205-206-207 208-209-210	204-205-206-207 208-209-210	203-204-205-206 207-208-209-210 211-212-213-214 215-216-218-220	203-204-205-206 207-208-209-210 211-212
UES 12-15-17-20-25 30-35-40-45-50 mm bore	UEV 20-25-30-35-40 45-50 mm bore	UEU 20-25-30-35-40 45-50 mm bore	UEF 12-15-17-20-25 30-35-40-45-50 mm bore	UEN 12-15-17-20-25 30-35-40-45-50 mm bore
LES 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm bore	LEV 20-25-30-35-40 45-50 mm bore	LEU 20-25-30-35-40 45-50 mm bore	LEF 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm bore	LEN 12-15-17-20-25 30-35-40-45-50 55-60 mm bore
UYS 12-15-17-20-25 30-35-40-45-50 55-60 mm bore	UYV 20-25-30-35-40 45-50 mm bore	UYU 20-25-30-35-40 45-50 mm bore	UYF 12-15-17-20-25 30-35-40-45-50 55-60 mm bore	UYN 12-15-17-20-25 30-35-40-45-50 55-60 mm bore
LYS 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm bore	LYV 20-25-30-35-40 45-50 mm bore	LYU 20-25-30-35-40 45-50 mm bore	LYF 12-15-17-20-25 30-35-40-45-50 55-60-65-70-75 80-90-100 mm bore	LYN 12-15-17-20-25 30-35-40-45-50 55-60 mm bore
USS 17-20-25-30-35 40-45-50-55-60 mm bore	USV 20-25-30-35-40 45-50 mm bore	USU 30-35-40-45-50 mm bore	USF 17-20-25-30-35 40-45-50-55-60 mm bore	USN 17-20-25-30-35 40-45-50-55 mm bore
LSS 25-30-35-40-45 50-55 mm bore	LSV 25-30-35-40-45 50 mm bore	LSU 30-35-40-45-50 mm bore	LSF 25-30-35-40-45 50-55 mm bore	LSN 25-30-35-40-45 50-55 mm bore
UKS 25-30-35-40-45 50-55 mm bore	UKV 25-30-35-40-45 50 mm bore	UKU 30-35-40-45-50 mm bore	UKF 25-30-35-40-45 50-55 mm bore	UKN 25-30-35-40-45 50-55 mm bore
LKS 20-25-30-35-40 45-50-55-60-65 75-80 mm bore	LKV 25-30-35-40-45 50 mm bore	LKU 20-25-30-35-40 45-50 mm bore	LKF 20-25-30-35-40 45-50-55-60-65 75-80 mm bore	LKN 20-25-30-35 40-45-50-55 mm bore

				
G	T	C	D	P
204-205-206-207 208-209-210-211 212-213	204-205-206-207 208-209-210-211	203-204-205-206 207-208-209-210 211-212	205-206-207	203-204-205-206 207-208
UEG 20-25-30-35-40 45-50 mm bore	UET 20-25-30-35-40 45-50 mm bore	UEC 17-20-25-30-35 40 mm bore	UED 20-25-30-35 mm bore	UEP 17-20-25-30-35 40 mm bore
LEG 20-25-30-35-40 45-50-55-60-65 mm bore	LET 20-25-30-35-40 45-50-55 mm bore	LEC 17-20-25-30-35 40 mm bore	LED 20-25-30-35 mm bore	LEP 17-20-25-30-35 40 mm bore
UYG 20-25-30-35-40 45-50-55-60 mm bore	UYT 20-25-30-35-40 45-50-55 mm bore	UYC 17-20-25-30-35 40 mm bore	UYD 20-25-30-35 mm bore	UYP 17-20-25-30-35 40 mm bore
LYG 20-25-30-35-40 45-50-55-60-65 mm bore	LYT 20-25-30-35-40 45-50-55 mm bore	LYC 17-20-25-30-35 40 mm bore	LYD 20-25-30-35 mm bore	LYP 17-20-25-30-35 40 mm bore
USG 20-25-30-35-40 45-50-55-60 mm bore	UST 20-25-30-35-40 45-50-55 mm bore	USC 20-25-30-35-40 mm bore	USD 17-20-25-30-35 mm bore	USP 20-25-30-35-40 mm bore
LSG 25-30-35-40-45 50-55 mm bore	LST 25-30-35-40-45 50-55 mm bore	LSC 25-30-35-40 mm bore	LSD 25-30-35 mm bore	LSP 25-30-35-40 mm bore
UKG 25-30-35-40-45 50-55-60-65 mm bore	UKT 25-30-35-40-45 50-55 mm bore			
LKG 20-25-30-35-40 45-50-55-60-65 mm bore	LKT 20-25-30-35 40-45-50 mm bore			

3.5. Y-Ball Bearings

UE		UE 2.. - Inner ring extended on one side only - Grub screw locking - Seals: Metal-rubber seal - Long life lithium/calcium grease
LE		LE 2.. - Inner ring extended on both sides - Grub screw locking - Seals: Metal-rubber seal + metal shield - Long life lithium/calcium grease
UY		UY 2.. - Inner ring extended on one side only - Eccentric locking collar - Seals: Metal-rubber seal - Long life lithium/calcium grease
LY		LY 2.. - Inner ring extended on both sides - Eccentric locking collar - Seals: Metal-rubber seal + metal shield - Long life lithium/calcium grease
UH		UH 2.. - Bore reduced one size by adapter sleeve - Standard adapter sleeve series H3(00) - Seals: Metal-rubber seal - Long life lithium-calcium grease - Bearing and adapter sleeve to be ordered together
LS		LS 2.. - Inner ring extended on both sides - Locking by interference on the shafts - Seals: Metal-rubber seal + metal shield - Long life lithium/calcium grease
LN		LN 2.. - Drive slot in inner ring - Inner ring extended on both sides - Seals: Metal-rubber seal + metal shield - Long life lithium/calcium grease
US		US 2.. - Inner ring and outer ring same width - Locking by interference on the shaft - Seals: Metal-rubber seal - Long life lithium/calcium grease
LK		LK 2..+H.... - Bore reduced one size by adapter sleeve - Standard adapter sleeve series H23 (00) - Seals: Metal-rubber seal + metal shield - Long life lithium/calcium grease - Bearing and adapter sleeve to be ordered separately
UK		UK 2..+H.... - Bore reduced one size by adapter sleeve - Standard adapter sleeve series H23 (00) - Seals: Metal-rubber seal - Long life lithium/calcium grease - Bearing and adapter sleeve to be ordered separately

3.6. Ball Bearings with Inch Bore



Hole in Inch	Numerical Designation		Hole in mm
	old	new	
1/2"	201-8	201-008	12.700
9/16"	202-9	202-009	14.2875
5/8"	202-10	202-010	15.8750
11/16"	203-11	203-011	17.6425
3/4"	204-12	204-012	19.0500
13/16"	204-13	205-013	20.6375
7/8"	205-14	205-014	22.2250
15/16"	205-15	205-015	23.8125
1"	205-16	205-100	25.4000
1 1/16"	206-17	206-101	26.9875
1 1/8"	206-18	206-102	28.5750
1 3/16"	206-19	206-103	30.1625
1 1/4"	206-20	206-104	31.7500
1 1/4"	207-20	207-104	31.7500
1 5/16"	207-21	207-105	33.3375
1 3/8"	207-22	207-106	34.9250
1 7/16"	207-23	207-107	36.5125
1 1/2"	208-24	208-108	38.1000
1 9/16"	208-25	208-109	39.6875
1 5/8"	209-26	209-110	41.2750
1 11/16"	209-27	209-111	42.8625
1 3/4"	209-28	209-112	44.4500
1 13/16"	209-29	209-113	46.0375
1 7/8"	210-30	210-114	47.6250
1 15/16"	210-31	210-115	49.2125
2"	211-32	211-200	50.8000
2 1/16"	211-33	211-201	52.3875
2 1/8"	211-34	211-202	53.9750
2 3/16"	211-35	211-203	55.5625
2 1/4"	212-36	212-204	57.1500
2 5/16"	212-37	212-205	58.7375
2 3/8"	212-38	212-206	60.3250
2 7/16"	212-39	212-207	61.9125
2 1/2"	213-40	213-208	63.5000
2 9/16"	214-41	214-209	65.0875
2 5/8"	214-42	214-210	66.675
2 11/16"	214-43	214-211	68.2625
2 3/4"	214-44	214-212	69.8500
2 13/16"	214-45	214-213	71.4375
2 7/8"	215-46	215-214	73.025
2 15/16"	215-47	215-215	74.6125
3"	215-48	215-300	76.2000
3 1/16"	215-49	215-301	77.7875
3 1/8"	216-50	216-302	79.3750
3 3/16"	216-51	216-303	80.9625
3 1/4"	217-52	217-304	82.5500
3 5/16"	217-53	217-305	84.1375
3 3/8"	217-54	217-306	85.725
3 7/16"	217-55	217-307	87.3125
3 1/2"	218-56	218-308	88.9000
3 9/16"	218-57	218-309	90.4875
3 5/8"	218-58	218-310	92.075
3 11/16"	218-59	218-311	93.6625
3 3/4"	220-60	220-312	95.25
3 13/16"	220-61	220-313	96.8375
3 7/8"	220-62	220-314	98.425
3 15/16"	220-63	220-315	100.0125
4"	220-64	220-400	101.6000

Y-Bearings Data

4.1. UE.....	30
4.2. LE	32
4.3. UY.....	34
4.4. LY.....	36
4.5. UH	38
4.6. LS	40
4.7. LN	41
4.8. US	42
4.9. LK	43
4.10. UK.....	44
4.11. 172.....	45



4.1. Y-Ball Bearings with Grub Screw Locking

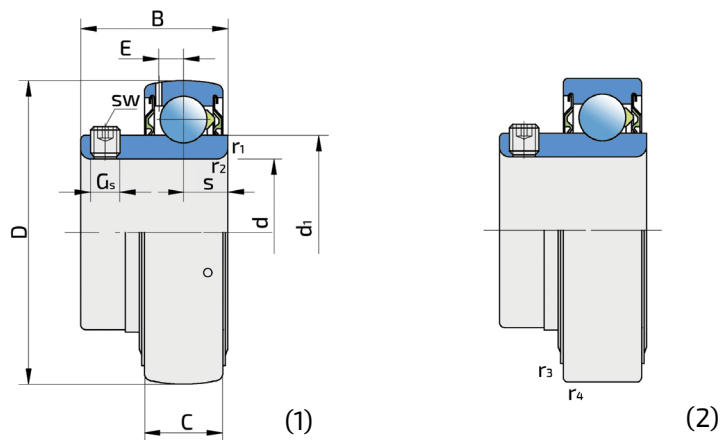


UE...
UE...SH

Shaft		Dimensions (mm)						
d	D	B	C	s	d ₁	E	Gs	sw
12	40	22.1	12	6.2	24.2	3.6	M6x0.75	3
15								
17								
20	47	25.5	14	7.2	28.2	4.3	M6x0.75	3
25	52	27.2	15	7.7	33.6	4.3	M6x0.75	3
30	62	33	18	9.2	39.7	5.6	M6x0.75	3
35	72	33	19	9.7	46.1	5.6	M6x0.75	3
40	80	36	21	10.7	51.8	6.1	M8x1	4
45	85	37	22	11.2	56.6	6.1	M8x1	4
50	90	38.8	22	11.2	62.5	6.4	M10x1	5


Dimensions (mm)		Load ratings (kN)			Mass	Designation	
r _{1.2}	r _{3.4}	C _{dyn}	C ₀	P _u	kg	1	2
0.3	0.6	9.56	4.75	0.200	0.09	UE 203/12 2S	UE 203/12 2S.SH
					0.08	UE 203/15 2S	UE 203/15 2S.SH
					0.07	UE 203 2S	UE 203 2S.SH
0.6	0.6	12.7	6.55	0.280	0.11	UE 204 2S	UE 204 2S.SH
0.6	0.6	14	7.8	0.335	0.14	UE 205 2S	UE 205 2S.SH
0.6	0.6	19.5	11.2	0.475	0.23	UE 206 2S	UE 206 2S.SH
1	1	25.5	15.3	0.655	0.31	UE 207 2S	UE 207 2S.SH
1	1.5	30.7	19	0.800	0.43	UE 208 2S	UE 208 2S.SH
1	1.5	33.2	21.6	0.915	0.48	UE 209 2S	UE 209 2S.SH
1	1.5	35.1	23.2	0.980	0.54	UE 210 2S	UE 210 2S.SH

4.2. Y-Ball Bearings with Grub Screw Locking

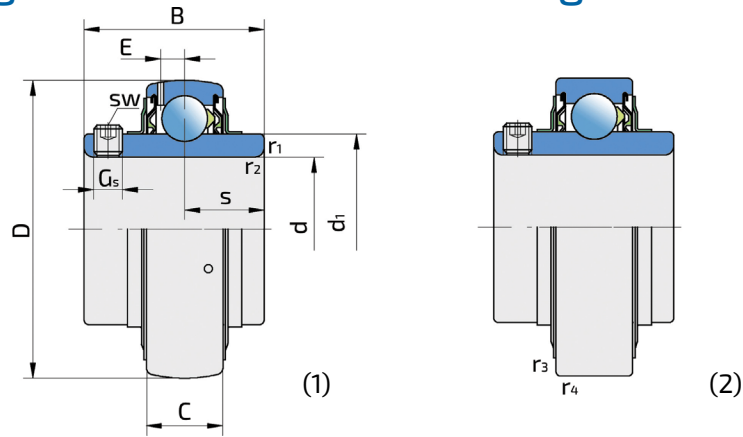


LE...
LE...SH

Shaft		Dimensions (mm)						
d	D	B	C	s	d ₁	E	Gs	sw
12	40	27.4	12	11.5	24.2	3.6	M6x0.75	3
15								
17								
20	47	31	14	12.7	28.2	4.3	M6x0.75	3
25	52	34.1	15	14.3	33.6	4.3	M6x0.75	3
	62	38	20	15	36.6	5	M6x0.75	3
30	62	38.1	18	15.9	39.7	5.1	M6x0.75	3
	72	43	23	17	44.6	5.6	M6x0.75	3
35	72	42.9	19	17.5	46.1	5.6	M6x0.75	3
	80	48	25	19	49.5	5.7	M8x1	4
40	80	49.2	21	19	51.8	6.1	M8x1	4
	90	52	27	19	56.1	6.1	M10x1	5
45	85	49.2	22	19	56.6	6.1	M8x1	4
	100	57	29	22	62.1	7.1	M10x1	5
50	90	51.6	22	19	62.5	6.4	M10x1	5
	110	61	32	22	68.7	7.9	M12x1.5	6
55	100	55.6	25	22.2	69.1	7	M10x1	5
	120	66	34	25	75.3	8.5	M12x1.5	6
60	110	65.1	26	25.4	75.5	7.7	M10x1	5
	130	71	36	26	81.8	9	M12x1.5	6
65	120	68.3	27	25.4	82.5	7.6	M10x1	5
	140	75	39	30	88.3	9.4	M12x1.5	6
70	125	69.9	28	30.2	87.1	8.1	M10x1	5
	150	78	41	33	94.9	10	M12x1.5	6
75	130	73.3	29	27	92.1	8.3	M10x1	5
80	140	77.8	30	30.2	97.4	8.2	M10x1	5
85	150	81	34	30.2	105	9.3	M12x1.5	6
90	160	89	36	35	112.5	10	M12x1.5	6
	190	96	48	42	121	14.3	M16x1.5	8
100	180	98.4	40	35	112.5	10	M12x1.5	6
	215	108	54	40	121	14.3	M16x1.5	10
110	240	117	60	46	149	18	M18x1.5	10
120	215	73.5	40	28.5	146.4	14	M12x1.5	6
	260	126	64	51	164	19.2	M18x1.5	10

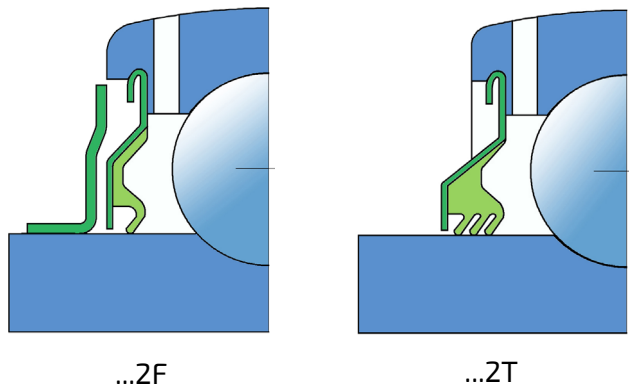


Load ratings (kN)					Mass	Designation	
r _{1,2}	r _{3,4}	C _{dyn}	C ₀	P _u	kg	1	2
0.3	0.6	9.56	4.75	0.200	0.11	LE 203/12 2F	LE 203/12 2F.SH
					0.10	LE 203/15 2F	LE 203/15 2F.SH
					0.09	LE 203 2F	LE 203 2F.SH
0.6	0.6	12.7	6.55	0.280	0.14	LE 204 2F	LE 204 2F.SH
0.6	0.6	14	7.8	0.335	0.17	LE 205 2F	LE 205 2F.SH
1.1	1.1	22.5	11.6	0.490	0.35	LE 305 2F	LE 305 2F.SH
0.6	0.6	19.5	11.2	0.475	0.28	LE 206 2F	LE 206 2F.SH
1.1	1.1	28.1	16	0.670	0.56	LE 306 2F	LE 306 2F.SH
1	1	25.5	15.3	0.655	0.41	LE 207 2F	LE 207 2F.SH
1.5	1.5	33.2	19	0.820	0.71	LE 307 2F	LE 307 2F.SH
1	1	30.7	19	0.800	0.55	LE 208 2F	LE 208 2F.SH
1.5	1.5	41	24	1.020	0.96	LE 308 2F	LE 308 2F.SH
1	1.5	33.2	21.6	0.915	0.60	LE 209 2F	LE 209 2F.SH
1.5	1.5	52.7	31.5	1.340	1.28	LE 309 2F	LE 309 2F.SH
1	1.5	35.1	23.2	0.980	0.69	LE 210 2F	LE 210 2F.SH
2	2	61.8	38	1.600	1.65	LE 310 2F	LE 310 2F.SH
1	2	43.6	29	1.25	0.94	LE 211 2F	LE 211 2F.SH
2	2	71.5	45	1.90	2.07	LE 311 2F	LE 311 2F.SH
1.5	2	52.7	36	1.53	1.30	LE 212 2F	LE 212 2F.SH
2.1	2.1	81.0	52	2.20	2.60	LE 312 2F	LE 312 2F.SH
1.5	2	57.2	40	1.70	1.70	LE 213 2F	LE 213 2F.SH
2.1	2.1	92.3	60	2.50	3.25	LE 313 2F	LE 313 2F.SH
1.5	2	62.4	44	1.86	1.90	LE 214 2F	LE 214 2F.SH
2.1	2.1	104	68	2.75	3.89	LE 314 2F	LE 314 2F.SH
1.5	2	66.3	49	2.04	2.10	LE 215 2F	LE 215 2F.SH
2	2.5	72.8	53	2.16	2.80	LE 216 2F	LE 216 2F.SH
2	2.5	83.2	62	2.50	3.30	LE 217 2F	LE 217 2F.SH
2	2.5	95.6	72	2.70	4.10	LE 218 2F	LE 218 2F.SH
3	3	151	108	3.80	7.87	LE 318 2F	LE 318 2F.SH
2	2.5	124	93	3.35	5.65	LE 220 2F	LE 220 2F.SH
3	3	174	140	4.75	11.2	LE 320 2F	LE 320 2F.SH
3	3	203	180	5.70	15.1	LE 322 2F	LE 322 2F.SH
2	2.5	155	113	3.90	6.20	LE 224 2F	LE 224 2F.SH
3	3	208	186	5.70	19	LE 324 2F	LE 324 2F.SH

4.3. Y-Ball Bearings with Eccentric Locking Collar

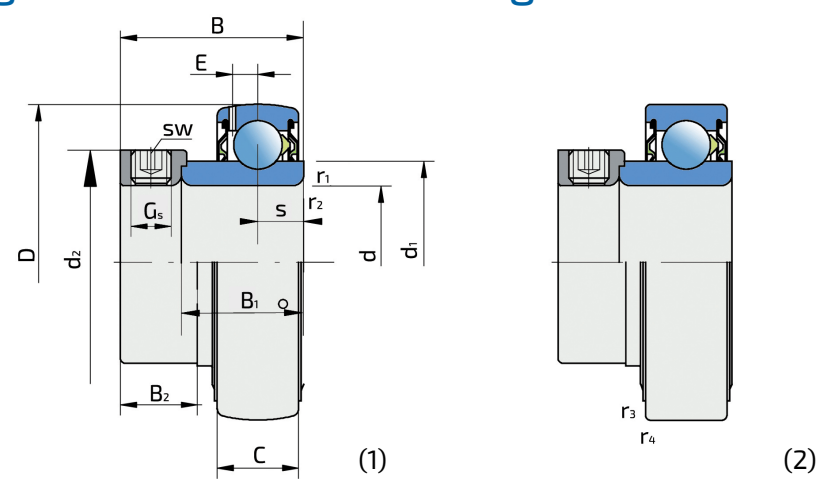

UY...
UY...SH



Shaft		Dimensions (mm)									
d	D	B	C	s	d ₁	B ₁	d ₂	B ₂	E	Gs	sw
12	40	28.6	12	6.5	24.2	19.1	28.6	13.5	3.6	M6x0.75	3
15											
17											
20	47	31	14	7.5	28.2	21.5	33	13.5	4.3	M6x0.75	3
25	52	31	15	7.5	33.6	21.5	37.4	13.5	4.3	M6x0.75	3
30	62	35.7	18	9	39.7	23.8	44.2	16	5.1	M8x1	4
35	72	38.9	19	9.5	46.1	25.4	51.2	17.5	5.6	M10x1	5
40	80	43.7	21	11	51.8	30.2	58.2	18.3	6.1	M10x1	5
45	85	43.7	22	11	56.6	30.2	63.6	18.3	6.1	M10x1	5
50	90	43.7	22	11	62.5	30.2	67.6	18.3	6.4	M10x1	5
55	100	48.4	25	12.5	69.1	32.5	76.2	20.6	7	M10x1	5
60	110	53.3	26	13.5	75.5	37.5	84	22.3	7.7	M10x1	5



...2S

Load ratings (kN)					Mass	Designation	
r _{1.2}	r _{3.4}	C _{dyn}	C ₀	P _u	kg	1	2
0.3	0.6	9.56	4.75	0.200	0.09	UY 203/12 2S	UY 203/12 2S.SH
					0.08	UY 203/15 2S	UY 203/15 2S.SH
					0.07	UY 203 2S	UY 203 2S.SH
0.6	0.6	12.7	6.55	0.280	0.11	UY 204 2S	UY 204 2S.SH
0.6	0.6	14	7.8	0.335	0.14	UY 205 2S	UY 205 2S.SH
0.6	0.6	19.5	11.2	0.475	0.23	UY 206 2S	UY 206 2S.SH
1	1	25.5	15.3	0.655	0.31	UY 207 2S	UY 207 2S.SH
1	1.5	30.7	19	0.800	0.43	UY 208 2S	UY 208 2S.SH
1	1.5	33.2	21.6	0.915	0.48	UY 209 2S	UY 209 2S.SH
1	1.5	35.1	23.2	0.980	0.54	UY 210 2S	UY 210 2S.SH
1	2	43.6	29	1.25	0.98	UY 211 2S	UY 211 2S.SH
1.5	2	52.7	36	1.53	1.3	UY 212 2S	UY 212 2S.SH

4.4. Y-Ball Bearings with Eccentric Locking Collar

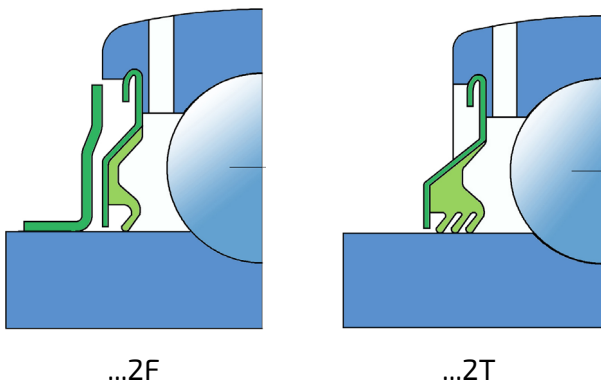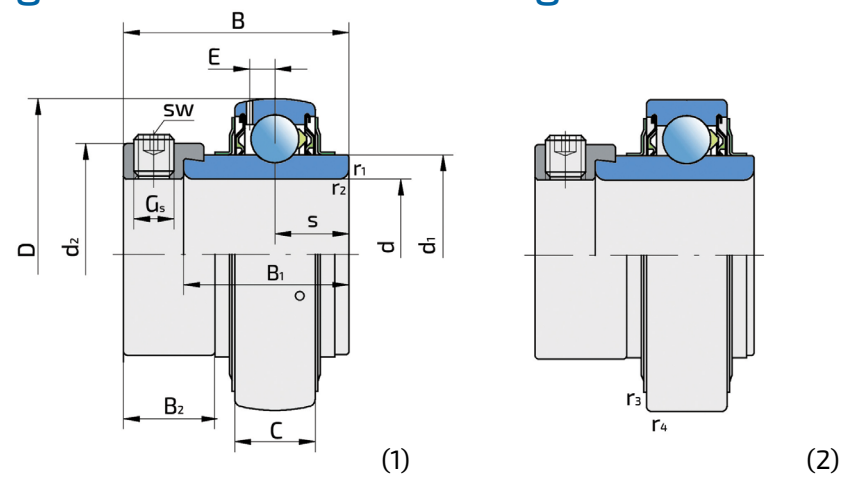


LY...
LY...SH


Shaft		Dimensions (mm)									
d	D	B	C	s	d ₁	B ₁	d ₂	B ₂	E	Gs	sw
12	40	37.3	12	13.9	24.2	27.8	28.6	13.5	3.6	M6x0.75	3
15											
17											
20	47	43.7	14	17.1	28.2	34.1	33	13.5	4.3	M6x0.75	3
25	52	44.4	15	17.5	33.6	34.8	37.4	13.5	4.3	M6x0.75	3
	62	46.8	20	16.7	36.6	34.9	42.8	15.9	5	M8x1	4
30	62	48.4	18	18.3	39.7	36.5	44.2	16	5.1	M8x1	4
	72	50	23	17.5	44.6	36.5	50	17.5	5.6	M8x1	4
35	72	51.1	19	18.8	46.1	37.6	51.2	17.5	5.6	M10x1	5
	80	51.6	25	18.3	49.5	38.1	55	17.5	5.7	M8x1	4
40	80	56.3	22	21.4	56.6	42.8	63.6	18.3	6.1	M10x1	5
	90	57.1	29	19.8	62.1	42.9	70	20.6	7.1	M10x1	5
45	85	56.3	22	21.4	56.6	42.8	63.6	18.3	6.1	M10x1	5
	100	58.7	29	19.8	62.1	42.9	70	20.6	7.1	M10x1	5
50	90	62.7	22	24.6	62.5	49.2	67.6	18.3	6.4	M10x1	5
	110	66.6	32	24.6	68.7	49.2	76.2	22.2	7.9	M10x1	5
55	100	71.4	25	27.8	69.1	55.6	76.2	20.6	7	M10x1	5
60	110	77.8	26	31	75.5	62	84	22.3	7.7	M10x1	5
	130	68.4	33	23	81.7	52	89	23	9.0	M10x1	5
65	120	85.7	27	34.1	82.5	68.2	86	24	7.6	M10x1	5
	140	85.7	39	32.6	88.3	65.1	97	27	9.4	M12x1.5	6
70	125	85.7	28	34.1	87.1	68.2	92.9	23.8	8.1	M10x1	5
	150	92.1	41	34.2	94.9	68.3	102	30.2	10	M12x1.5	6
75	130	92.1	29	37.3	92.1	74.6	101.7	24	8.3	M10x1	5
80	140	100	30	40.4	97.4	80.8	110	26.2	8.2	M12x1.5	6
90	160	106.4	36	43.6	112.5	88.2	123.7	25.2	10	M12x1.5	6
	190	115.9	48	43.6	121	87.3	133	38.5	14.3	M20x1.5	
100	180	75	40	25.5	124.8	57.5	130	25.5	12	M12x1.5	6
	215	128.6	54	50	135	100	146	38.5	16.7	M20x1.5	
110	240	141.3	60	49.2	149	106.4	168	44.8	18	M20x1.5	
120	215	81	40	28.5	146.4	63.5	150	25.5	14	M12x1.5	6

Load ratings (kN)					Mass	Designation	
r _{1.2}	r _{3.4}	C _{dyn}	C ₀	P _u	kg	1	2
0.3	0.6	9.56	4.75	0.200	0.162	LY 203/12 2F	LY 203/12 2F.SH
					0.143	LY 203/15 2F	LY 203/15 2F.SH
					0.128	LY 203 2F	LY 203 2F.SH
0.6	0.6	12.7	6.55	0.280	0.19	LY 204 2F	LY 204 2F.SH
0.6	0.6	14	7.8	0.335	0.23	LY 205 2F	LY 205 2F.SH
1.1	1.1	22.5	11.6	0.490	0.43	LY 305 2F	LY 305 2F.SH
0.6	0.6	19.5	11.2	0.475	0.37	LY 206 2F	LY 206 2F.SH
1.1	1.1	28.1	16	0.670	0.68	LY 306 2F	LY 306 2F.SH
1	1	25.5	15.3	0.655	0.57	LY 207 2F	LY 207 2F.SH
1.5	1.5	33.2	19	0.820	0.80	LY 307 2F	LY 307 2F.SH
1	1.5	30.7	19	0.800	0.80	LY 208 2F	LY 208 2F.SH
1.5	1.5	41	24	1.020	1.08	LY 308 2F	LY 308 2F.SH
1	1.5	33.2	21.6	0.915	0.76	LY 209 2F	LY 209 2F.SH
1.5	1.5	52.7	31.5	1.340	1.44	LY 309 2F	LY 309 2F.SH
1	1.5	35.1	23.2	0.980	0.91	LY 210 2F	LY 210 2F.SH
2	2	61.8	38	1.600	1.86	LY 310 2F	LY 310 2F.SH
1	2	43.6	29	1.25	1.20	LY 211 2F	LY 211 2F.SH
1.5	2	52.7	36	1.53	1.67	LY 212 2F	LY 212 2F.SH
2.1	2.1	81	52	2.20	2.95	LY 312 2F	LY 312 2F.SH
1.5	2	57.2	40	1.70	2.30	LY 213 2F	LY 213 2F.SH
2.1	2.1	92.3	60	2.50	3.67	LY 313 2F	LY 313 2F.SH
1.5	2	62.4	44	1.86	2.50	LY 214 2F	LY 214 2F.SH
2.1	2.1	104	68	2.75	4.40	LY 314 2F	LY 314 2F.SH
1.5	2	66.3	49	2.04	2.90	LY 215 2F	LY 215 2F.SH
2	2.5	72.8	53	2.16	3.54	LY 216 2F	LY 216 2F.SH
2	2.5	95.6	72	2.70	5.11	LY 218 2F	LY 218 2F.SH
3	3	151	108	3.80	9.10	LY 318 2F	LY 318 2F.SH
2	2.5	124	93	3.35	4.35	LY 220 2F	LY 220 2F.SH
3	3	174	140	4.75	12.6	LY 320 2F	LY 320 2F.SH
3	3	203	180	5.70	17.2	LY 222 2F	LY 222 2F.SH
2	2.5	155	113	3.90	6.70	LY 224 2F	LY 224 2F.SH

4.5. Y-Ball Bearings with Integral Adapter Sleeve

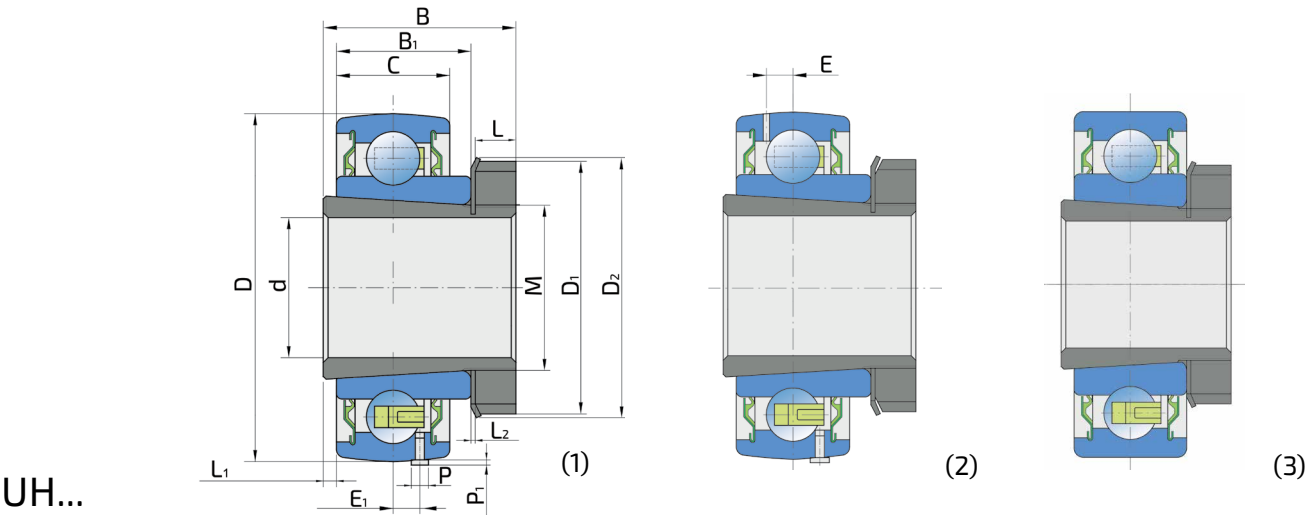


Shaft		Dimensions (mm)										
d	D	D ₁	D ₂	B	B ₁	C	L	L ₁	L ₂	E	E ₁	M
20	52	38	42.3	29	18	16	7	1	1.25	-	4.3	25x1.5
25	62	45	49	32	20	18	7	1	1.25	-	5	30x1.5
30	72	52	57	35	22	19	8	1	1.25	-	5.7	35x1.5
35	80	58	62	36	23	21	9	1	1.25	-	6.5	35x1.5
40	85	65	69	39	23	21	10	1	1.25	-	6.5	40x1.5
30	85	52	57	35	23	23	8	1	1.25	-	-	35x1.5
35	85	58	62	36	23	23	9	1	1.25	-	-	40x1.5
40	85	65	69	39	23	23	10	1	1.25	-	-	45x1.5
40	85	65	69	39	23	21	10	1	1.25	6.5	6.5	45x1.5
50	100	75	81	45	25	25	11	1	1.25	7	7	50x2
70	150	105	112	70	45	39	15	1	1.75	12	12	80x2



		Load ratings (kN)			Mass	Designation	Fig.
P	P ₁	C _{dyn}	C ₀	P _u	kg		
3	2	14	7.8	0.335	0.196	UH 205/20 2S.H.T	1
3	2	19.5	11.2	0.475	0.337	UH 206/25 2S.H.T	1
3	2	25.5	15.3	0.655	0.467	UH 207/30 2S.H.T	1
3	2	30.7	19	0.800	0.600	UH 208/35 2S.H.T	1
3	2	33.2	21.6	0.915	0.643	UH 209/40 2S.H.T	1
-	-	33.2	21.6	0.915	0.737	UH 209/30 2S.SH	3
-	-	33.2	21.6	0.915	0.700	UH 209/35 2S.SH	3
-	-	33.2	21.6	0.915	0.727	UH 209/40 2S.SH	3
3	2	33.2	21.6	0.915	0.643	UH 209/40 2S.T	2
3	2	43.6	29	1.25	1.002	UH 211/50 2S.T	2
5	2.8	85	65	2.5	3.87	UH 217/70 2S.T	2


4.6. Y-Ball Bearings with Extended Standard Inner Ring

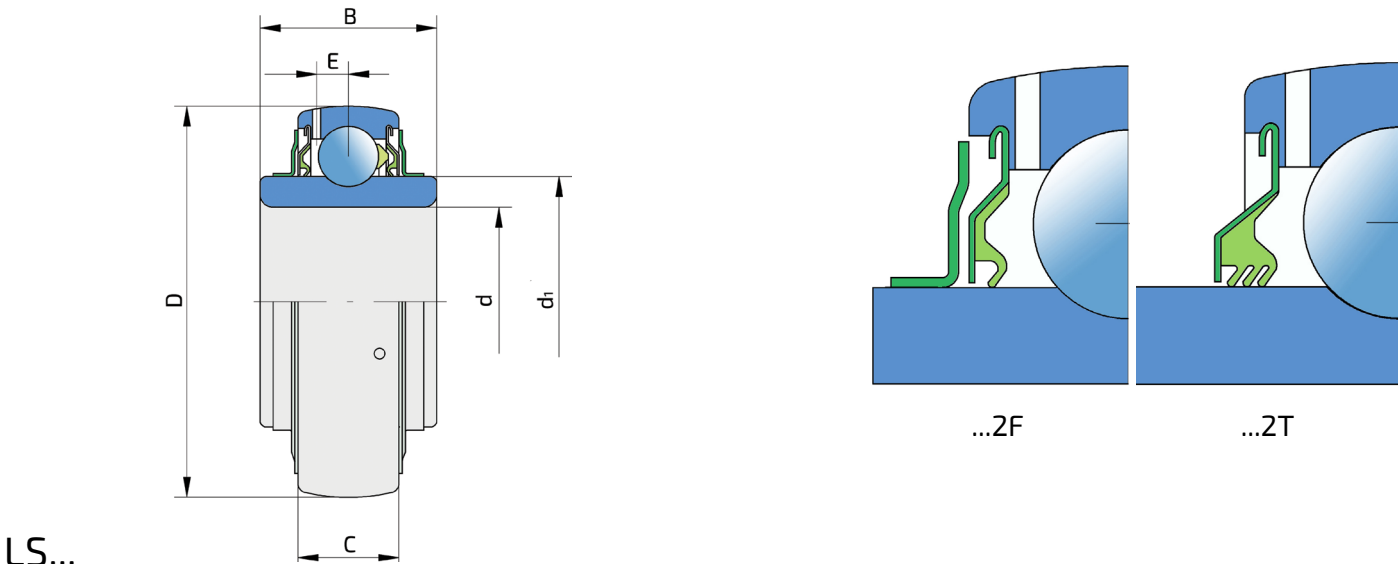

LS...

Shaft	Dimensions (mm)					Load rating (kN)			Mass	Designations
	d	D	B	C	d ₁	E	C _{dyn}	C _o	P _u	
25	52	24	15	33.6	4.3	14	7.8	0.335	0.14	LS 205 2F
30	62	28	18	39.7	5.1	19.5	11.2	0.475	0.23	LS 206 2F
35	72	30.5	19	46.1	5.6	25.5	15.3	0.655	0.31	LS 207 2F
40	80	33.9	21	51.8	6.1	30.7	19	0.800	0.43	LS 208 2F
45	85	35	22	56.6	6.1	33.2	21.6	0.915	0.53	LS 209 2F
50	90	37	22	62.5	6.4	35.1	23.2	0.980	0.6	LS 210 2F
55	100	40	25	69.1	7	43.6	29	1.25	0.79	LS 211 2F

4.7. Y-Ball Bearings with Drive Slot in Inner Ring

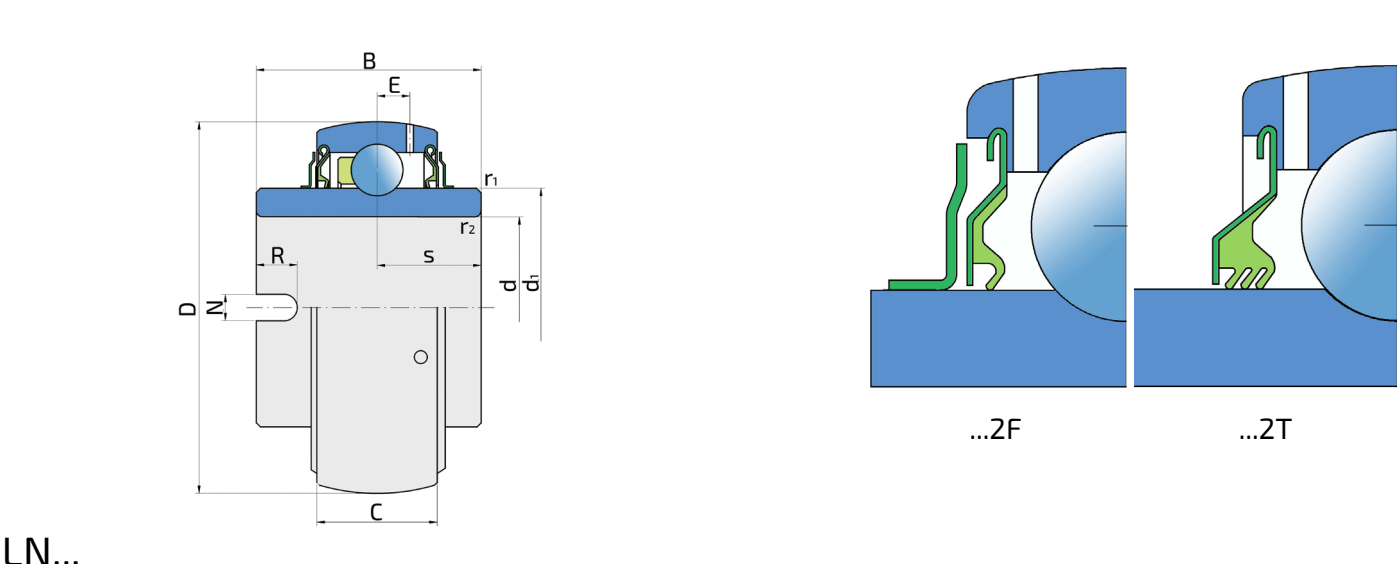


LN...

Shaft	Dimensions (mm)							Load rating (kN)			Mass	Designations
	d	D	B	C	d ₁	N	R	E	C _{dyn}	C _o	P _u	
20	47	34.1	14	28.2	7	7	4.3	12.7	6.55	0.280	0.16	LN 204 2F
30	62	36.5	18	39.7	8	7	5.1	19.5	11.2	0.475	0.30	LN 206 2F
35	72	37.7	19	46.1	8	7	5.6	25.5	15.3	0.655	0.49	LN 207 2F

* All bearings are also available with 2T sealing.

* All bearings are also available with 2T sealing.


4.8. Y-Ball Bearings with Standard Inner Ring

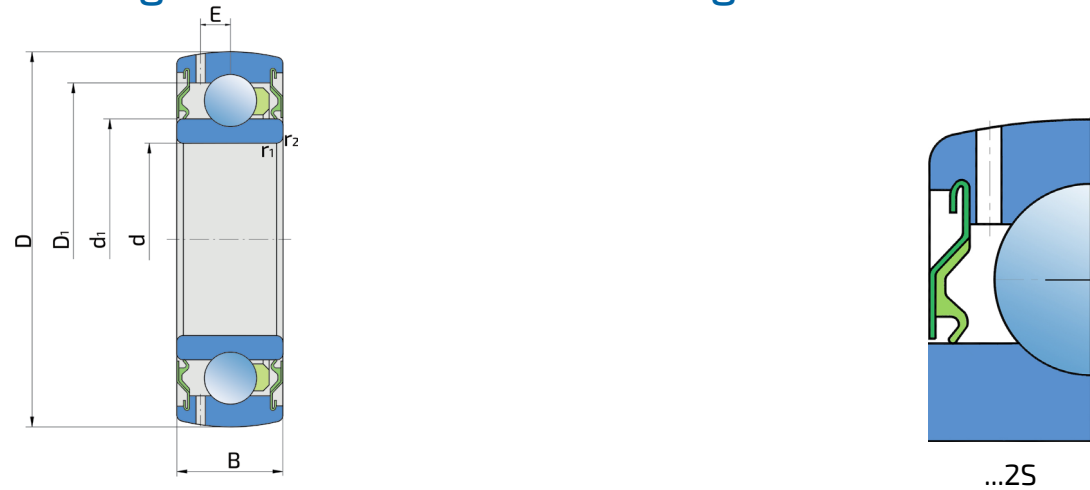

US...

Shaft	Dimensions (mm)						Load rating (kN)			Mass	Designations
d	D	B	d ₁	D ₁	E	r _{1.2}	C _{dyn}	C _o	P _u	kg	
17	40	12	24.2	32.6	3.6	0.6	7.35	4.75	0.140	0.064	US 203 2S
	47	14	26.5	37.6	4.3	0.7	13.5	6.55	0.275	0.14	US 303 2S
20	47	14	28.2	38.6	4.3	1	12.8	6.6	0.196	0.094	US 204 2S
25	52	15	33.6	44	4.3	1	14	7.80	0.232	0.116	US 205 2S
	62	17	36.6	50.9	5.6	1.1	22.5	11.6	0.49	0.20	US 305 2S
30	62	16	39.7	51.6	5.1	1	19.5	11.3	0.335	0.18	US 206 2S
	72	19	44.6	59.2	6.1	1.1	28.1	16	0.67	0.30	US 306 2S
35	72	17	46.1	60.5	5.6	1.1	25.5	15.3	0.455	0.28	US 207 2S
	80	21	49.5	66.1	7	1.5	33.2	19	0.82	0.40	US 307 2S
40	80	18	52.0	67.3	6.1	1.1	32.5	19.8	0.560	0.37	US 208 2S
	90	23	56.1	74.7	7.6	1.5	41	24	1.02	0.55	US 308 2S
45	85	19	56.6	72.6	6.1	1.1	32.5	20.4	0.640	0.40	US 209 2S
	100	25	62.1	83.7	7.7	1.5	52.7	31.5	1.34	0.73	US 309 2S
50	90	20	62.5	78.2	6.4	1.1	35	23.2	0.695	0.45	US 210 2S
	110	27	68.7	92.6	7.7	2	61.8	38	1.6	0.95	US 310 2S
55	100	21	69.1	85.9	7	1.5	43.5	29.0	0.865	0.60	US 211 2S
60	110	22	75.5	95	7.7	1.5	52	36.0	1.060	0.77	US 212 2S
65	120	23	82.5	102.46	7.6	1.5	57	40	1.73	0.94	US 213 2S


4.9. Y-Ball Bearings with Tapered Bore
Y-Ball Bearings with Adapter Sleeve

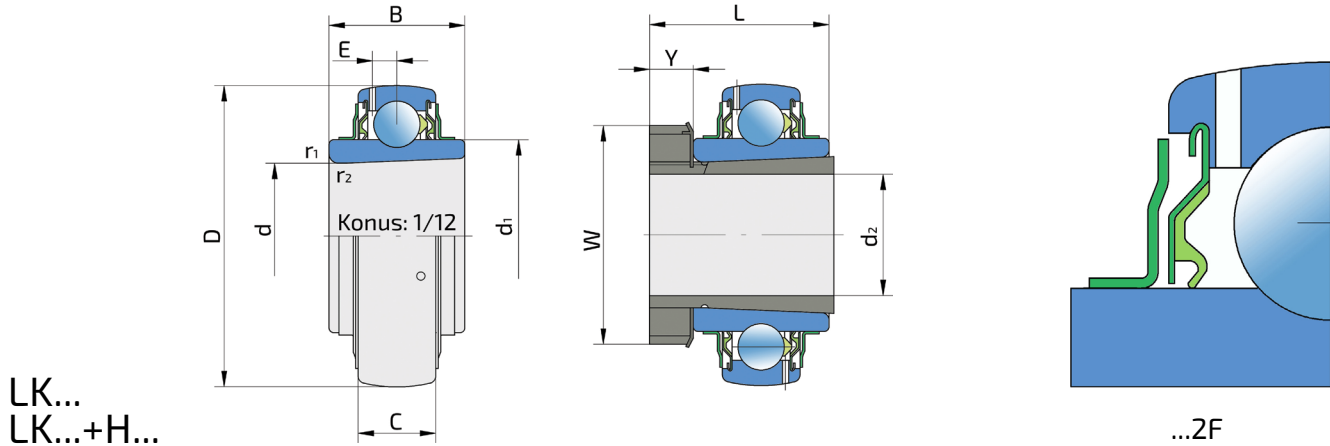

LK...
LK...+H...

Shaft		Dimensions (mm)								Load ratings (kN)			Mass	Designation
d ₂	d	D	L	B	C	d ₁	W	Y	E	C _{dyn}	C _o	P _u	kg	1, 2
20	25	52	-	24	15	33.6	-	-	4.3	14	7.8	0.232	0.13	LK 205 2F
			35				38	8					0.22	LK 205 2F+H 2305
25	30	62	-	28	18	39.7	-	-	5.1	19.5	11.3	0.335	0.22	LK 206 2F
			38				45	8					0.33	LK 206 2F+H 2306
30	35	72	-	30.5	19	46.1	-	-	5.6	25.5	15.3	0.445	0.29	LK 207 2F
			43				52	9					0.47	LK 207 2F+H 2307
35	40	80	-	33.9	21	52	-	-	6.1	32.5	19.8	0.560	0.41	LK 208 2F
			46				58	10					0.63	LK 208 2F+H 2308
40	45	85	-	35	22	56.6	-	-	6.1	32.5	20.4	0.640	0.47	LK 209 2F
			50				65	11					0.73	LK 209 2F+H 2309
45	50	90	-	37	22	62.5	-	-	6.4	35	23.2	0.695	0.51	LK 210 2F
			55				70	12					0.86	LK 210 2F+H 2310
50	55	100	-	40	25	69.1	-	-	7	43.5	29	0.865	0.75	LK 211 2F
			59				75	12					1.10	LK 211 2F+H 2311
55	60	110	-	42.5	26	75.5	-	-	7.7	52	36	1.060	1.05	LK 212 2F
			62				80	13					1.40	LK 212 2F+H 2312
60	65	120	-	38	27	82.5	-	-	7.6	57	40	1.180	1.30	LK 213 2F
			65				98	14					1.70	LK 213 2F+H 2313
65	75	130	-	41	29	92.1	-	-	8.3	62	44.5	1.44	1.54	LK 215 2F
			73				98	15					2.59	LK 215 2F+H 2315
70	80	140	-	44	30	97.4	-	-	8.2	72	54	1.53	1.99	LK 216 2F
			78				105	17					3.27	LK 216 2F+H 2316
75	85	150	-	46	34	105	-	-	8.2	85	65	1.72	2.47	LK 217 2F
			82				110	18					3.92	LK 217 2F+H 2317
80	90	160	-	58	36	112	-	-	10	102	79	1.96	2.99	LK 218 2F
			86				120	18					4.68	LK 218 2F+H 2318


4.10. Y-Ball Bearings with Tapered Bore

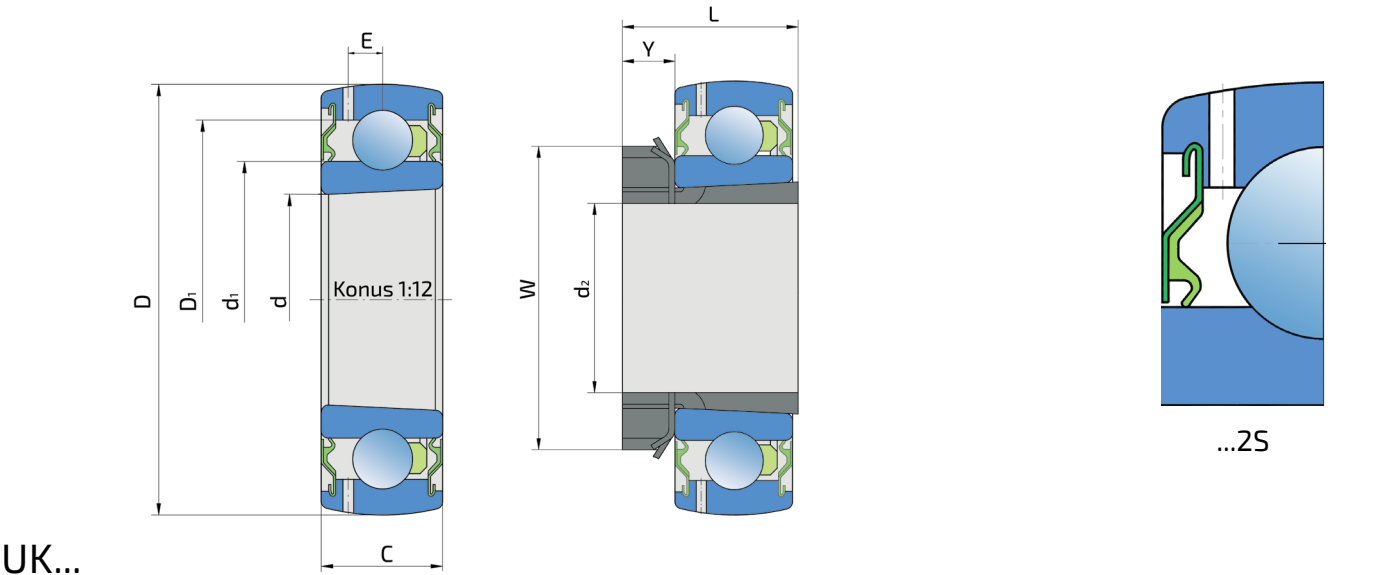

UK...

Shaft		Dimensions (mm)								Load rating (kN)			Mass	Designation	
d ₂	d	D	L	B	C	d ₁	D ₁	W	Y	E	C _{dyn}	C _o	P _u		kg
20	25	52	-	15	15	33.6	44	-	-	4.3	14.0	7.80	0.232	0.14	UK 205 2S
			26					38	8						UK 205 2S+H 205
25	30	62	-	16	16	39.7	51.6	-	-	5.1	19.5	11.3	0.335	0.18	UK 206 2S
			27					45	8						UK 206 2S+H 206
30	35	72	-	17	17	46.1	60.5	-	-	5.6	25.5	15.3	0.445	0.28	UK 207 2S
			29					52	9						UK 207 2S+H 207
35	40	80	-	18	18	52	67.3	-	-	6.1	32.5	19.8	0.560	0.36	UK 208 2S
			31					58	10						UK 208 2S+H 208
40	45	85	-	19	19	56.6	72.6	-	-	6.1	32.5	20.4	0.640	0.39	UK 209 2S
			33					65	11						UK 209 2S+H 209
45	50	90	-	20	20	62.5	78.2	-	-	6.4	35.0	23.2	0.695	0.44	UK 210 2S
			55					70	12						UK 210 2S+H 210
50	55	100	-	21	21	69.1	85.9	-	-	7	43.5	29.0	0.865	0.59	UK 211 2S
			59					75	12						UK 211 2S+H 211
55	60	110	-	22	22	75.5	95	-	-	7.7	52.0	36.0	1.060	0.75	UK 212 2S
			62					80	13						UK 212 2S+H 212

4.11. Y-Ball Bearings with Standard Inner Ring

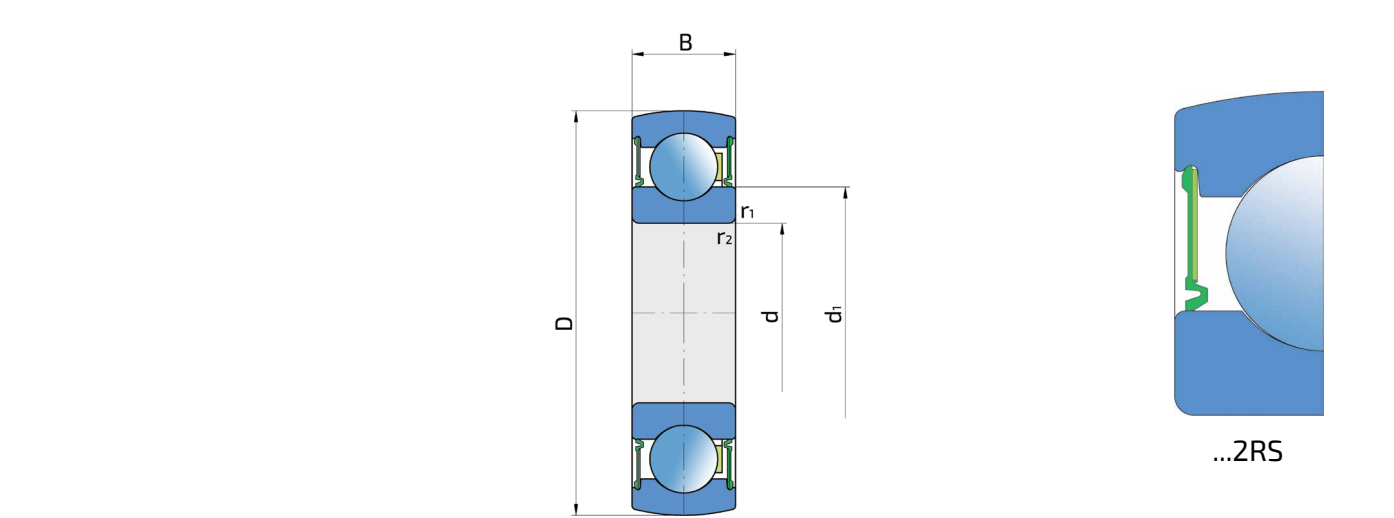


172...

Shaft		Dimensions (mm)			Load ratings (kN)			Mass		Designation
d	D	B	d ₁	r _{1.2}	C _{dyn}	C _o	P _u	kg		
15	35	11	21.5	0.6	7.80	3.75	0.16	0.04		1726202 2RS1
17	40	12	24.2	0.6	9.50	4.75	0.20	0.06		1726203 2RS1
		14	26.5	0.7	13.5	6.55	0.29	0.14		1726303 2RS1
20	47	14	28.2	1	12.7	6.55	0.28	0.10		1726204 2RS1
25	52	15	33.6	1	14	7.80	0.34	0.11		1726205 2RS1
		17	36.6	1.1	22.5	11.6	0.49	0.20		1726305 2RS1
30	62	16	39.7	1	19.5	11.2	0.48	0.18		1726206 2RS1
		19	44.6	1.1	28.1	16	0.67	0.30		1726306 2RS1
35	72	17	46.1	1	25.5	15.3	0.66	0.25		1726207 2RS1
		21	49.5	1.5	33.2	19	0.82	0.40		1726307 2RS1
40	80	18	52	1.1	30.7	19	0.80	0.32		1726208 2RS1
		23	56.1	1.5	41	24	1.02	0.55		1726308 2RS1
45	85	19	56.6	1.1	32.5	20.4	0.92	0.37		1726209 2RS1
		25	62.1	1.5	52.7	31.5	1.34	0.73		1726309 2RS1
50	90	20	62.5	1.1	35.1	23.2	0.98	0.41		1726210 2RS1
		27	68.7	2	61.8	38	1.60	0.95		1726310 2RS1
55	100	21	69.1	1.5	43.6	29	1.25	0.56		1726211 2RS1
60	110	22	75.5	1.5	52	36	1.40	0.75		1726212 2RS1
65	120	23	82.5	1.5	57	40	1.73	0.94		1726213 2RS1

Angular Contact Ball Bearings



5.1. Angular Contact Ball Bearing - Double Row

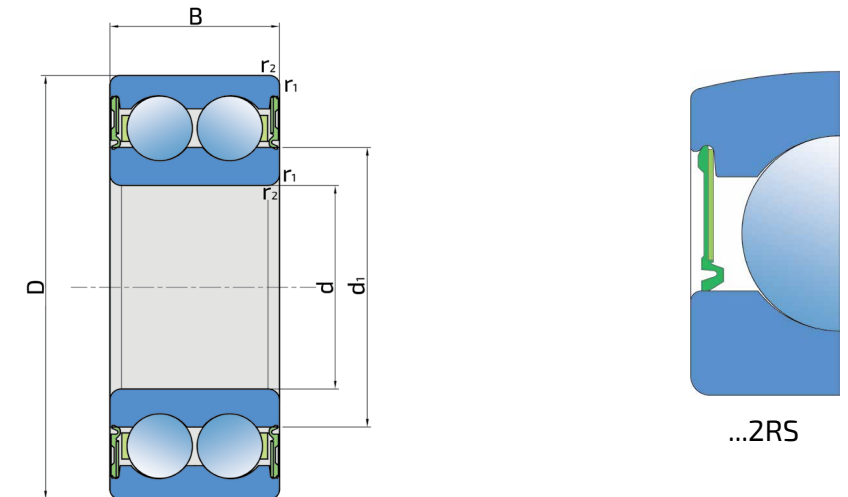

32...
33...


Shaft d	Dimensions (mm)			Load ratings (kN)				Mass kg	Designation
	D	B	d ₁	r _{1,2}	C _{dyn}	C _o	P _u		
20	47	20.6	27.7	1	20	12	0.51	0.16	3204 B.2RS1
25	52	20.6	32.7	1	21.6	14.3	0.6	0.18	3205 B.2RS1
30	62	23.8	38.7	1	30	20.4	0.87	0.29	3206 B.2RS1
35	80	34.9	44.6	1.5	52	35.5	1.5	0.71	3307 B.2RS1

Y-Bearing Units Data

6.1. Housing "S"	50
6.2. Housing "V"	52
6.3. Housing "U"	54
6.4. Housing "F"	56
6.5. Housing "N"	58
6.6. Housing "G"	60
6.7. Housings "T"	62
6.8. Housing "C"	64
6.9. Housing "D"	66
6.10. Housing "P"	67




6.1. Y-Bearing Plummer Block Units with Grey Cast Iron Housing "S"

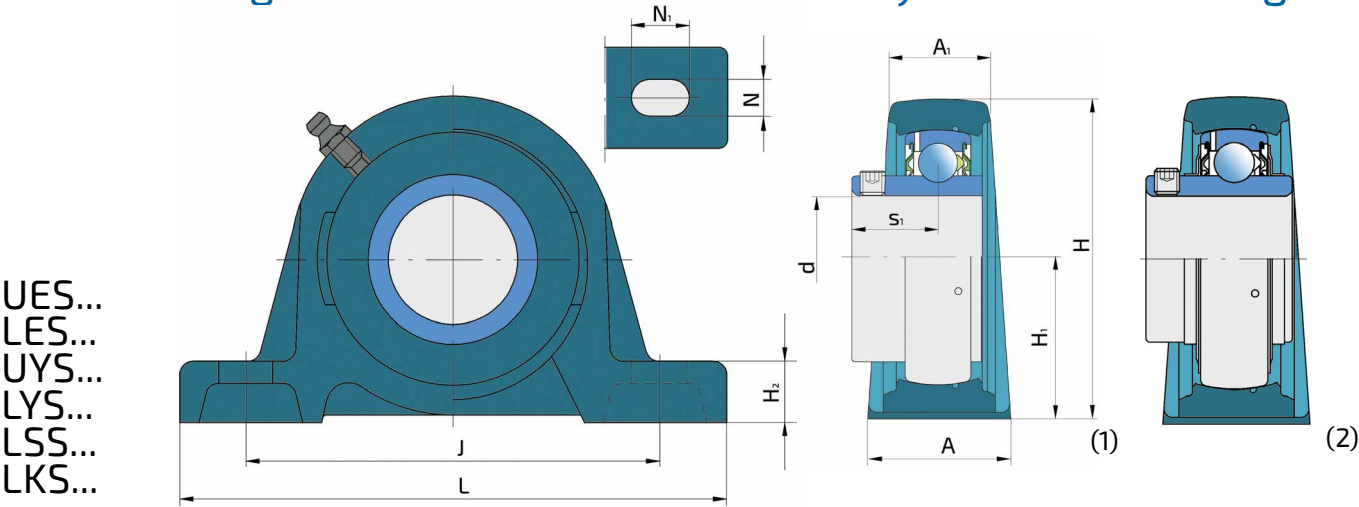


Shaft	Dimensions (mm)												Mass	Designation
d	A	A ₁	H	H ₁	H ₂	J _{min.}	J _{max.}	L	N	N ₁	s ₁	fig.	kg	
17	32	18	56.2	30.2	14	88	106	127	11.5	20.5	15.9	1	0.48	UES 203 2S
												2	0.50	LES 203 2F
												3	0.52	UYS 203 2S
												4	0.54	LYS 203 2F
20	34	23	63.8	33.3	14	89	104.5	127	13	20.7	18.3	1	0.55	UES 204 2S
												2	0.57	LES 204 2F
												3	0.59	UYS 204 2S
												4	0.62	LYS 204 2F
25	38	24	69.5	36.5	16	94	111	140	13	21.5	20	6	0.77	LKS 205 2F + H2305
												1	0.70	UES 205 2S
												2	0.73	LES 205 2F
												3	0.73	UYS 205 2S
30	42	27	81.4	42.9	16	111	125	165	17	24	22	4	0.78	LYS 205 2F
												5	0.70	LSS 205 2F
												6	1.15	LKS 206 2F + H2306
												1	1.06	UES 206 2S
35	46	28	92.1	47.6	17	122	136	167	17	24	24.3	2	1.12	LES 206 2F
												3	1.12	UYS 206 2S
												4	1.19	LYS 206 2F
												5	1.06	LSS 206 2F
40	49	31	98.2	49.2	18	128	145	184	17	25.5	27	6	1.55	LKS 207 2F + H2307
												1	1.46	UES 207 2S
												2	1.53	LES 207 2F
												3	1.58	UYS 207 2S
50	58	38	113.2	57.2	22	151	164	206	20	26.5	30.5	4	1.70	LYS 207 2F
												5	1.47	LSS 207 2F
												6	1.90	LKS 208 2F + H2308
												1	1.85	UES 208 2S
60	65	47	136.8	69.8	26.5	179	198	241	20	29.5	34.3	2	1.96	LES 208 2F
												3	1.99	UYS 208 2S
												4	2.08	LYS 208 2F
												5	1.88	LSS 208 2F
70	72	46	155	79.4	27	205	215	266	25	30	39.7	6	2.35	LKS 209 2F + H2309
												1	2.35	UES 209 2S
												2	2.35	LES 209 2F
												3	2.35	UYS 209 2S

* All bearing units are available from Ductile Cast Iron.

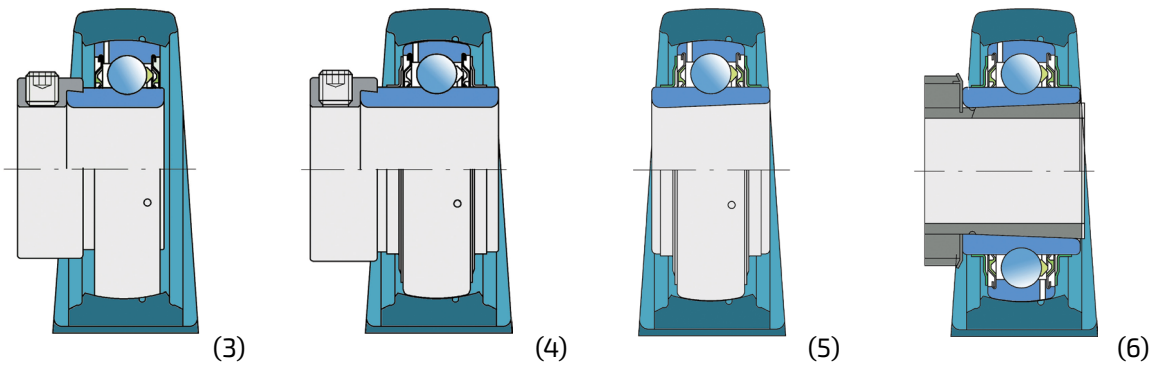


Shaft	Dimensions (mm)											fig.	Mass kg	Designation											
d	A	A ₁	H	H ₁	H ₂	J _{min.}	J _{max.}	L	N	N ₁	s ₁														
45	52	36	107	54	20	136	151	190	17	23.5	25.8	1	2.23	UES 209 2S											
											30.2	2	2.34	LES 209 2F											
											32.7	3	2.34	UYS 209 2S											
											34.9	4	2.46	LYS 209 2F											
											17.5	5	2.25	LSS 209 2F											
	58	38	113.2	57.2	22	151	164	206	20	26.5	30.5	6	2.85	LKS 210 2F + H2310											
50	58	38	113.2	57.2	22	151	164	206	20	26.5	27.6	1	2.59	UES 210 2S											
											32.6	2	2.74	LES 210 2F											
											32.7	3	2.73	UYS 210 2S											
											38.1	4	2.92	LYS 210 2F											
											20	5	2.65	LSS 210 2F											
	60	40	125.5	63.5	24	163	180	219	20	27.5	32.5	6	3.75	LKS 211 2F + H2311											
55	60	40	125.5	63.5	24	163	180	219	20	27.5	33.4	2	3.62	LES 211 2F											
											35.9	3	3.59	UYS 211 2S											
											43.6	4	3.80	LYS 211 2F											
											21.2	5	3.59	LSS 211 2F											
												65	47	136.8	69.8	26.5	179	198	241	20	29.5	34.3	6	4.55	LKS 212 2F + H2312
60	65	47	136.8	69.8	26.5	179	198	241	20	29.5	39.7	2	4.62	LES 212 2F											
											40.3	3	4.19	UYS 212 2S											
											46.8	4	4.82	LYS 212 2F											
												70	49	150	76.2	27	193	213	265	25	35	35.8	6	5.70	LKS 213 2F + H2313
												70	49	150	76.2	27	193	213	265	25	35	42.9	2	6.02	LES 213 2F
											51.6	4	6.55	LYS 213 2F											
	74	54	165	82.5	28	209	225	275	25	33	38.8	6	7.55	LKS 215 2F + H2315											
70	72	46	155	79.4	27	205	215	266	25	30	39.7	2	6.60	LES 214 2F											
											51.6	4	7.10	LYS 214 2F											
												78	50	175	88.9	30	222	242	292	25	35	41.5	6	9.50	LKS 216 2F + H2316
												74	54	165	82.5	28	209	225	275	25	33	46.3	2	7.80	LES 215 2F
																						54.8	4	8.40	LYS 215 2F
80	78	50	175	88.9	30	222	242	292	25	35	47.6	2	9.20	LES 216 2F											
											59.6	4	10.0	LYS 216 2F											
												88	54	200	101.6	33	254	270	327	27	35	47	6	13.7	LKS 218 2F + H2318
											90	88	54	200	101.6	33	254	270	327	27	35	54	2	13.7	LES 218 2F
																						62.8	4	14.6	LYS 218 2F
100	95	57	225	115	38	286	330	380	26	48	63.4	2	17.8	LES 220 2F											
											49.5	4	17.4	LYS 220 2F											

6.2. Y-Bearing Plummer Block Units with Grey Cast Iron Housing "V"

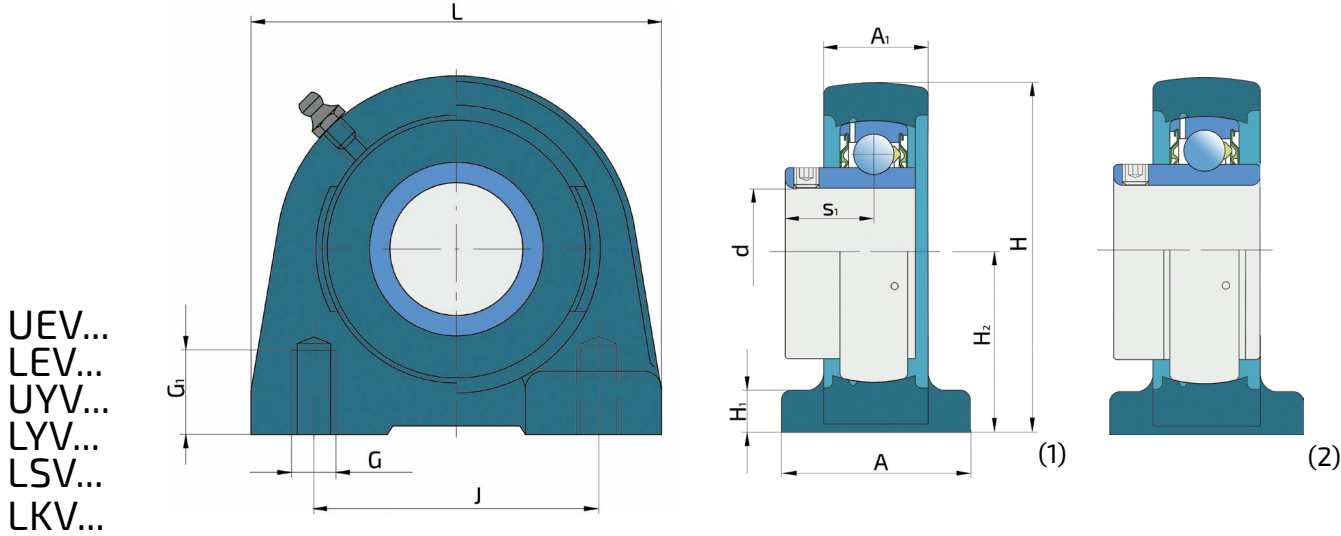


Shaft		Dimensions (mm)									fig.	Mass kg	Designation
d	L	A	J	H	G	G ₁	H ₁	H ₂	A ₁	s ₁			
20	76	38	52	62	M10	12	8	30.2	24	18.3	1	0.52	UEV 204 2S
										18.3	2	0.54	LEV 204 2F
										23.5	3	0.56	UYV 204 2S
										26.6	4	0.59	LYV 204 2F
	84	38	56	72	M10	15	10	36.5	25	20	6	0.74	LKV 205 2F + H2305
25	84	38	56	72	M10	15	10	36.5	25	19.5	1	0.65	UEV 205 2S
										19.8	2	0.68	LEV 205 2F
										23.5	3	0.68	UYV 205 2S
										26.9	4	0.73	LYV 205 2F
										12	5	0.65	LSV 205 2F
	94	48	66	84	M14	18	10	42.9	28.5	22	6	1.13	LKV 206 2F + H2306
30	94	48	66	84	M14	18	10	42.9	28.5	21	1	0.97	UEV 206 2S
										22.2	2	1.03	LEV 206 2F
										26.7	3	1.03	UYV 206 2S
										30.1	4	1.10	LYV 206 2F
										14	5	0.97	LSV 206 2F
	110	48	80	95	M14	20	12	47.6	30.5	24.3	6	1.53	LKV 207 2F + H2307
35	110	48	80	95	M14	20	12	47.6	30.5	23.3	1	1.37	UEV 207 2S
										25.5	2	1.44	LEV 207 2F
										29.4	3	1.49	UYV 207 2S
										32.3	4	1.57	LYV 207 2F
										15.2	5	1.38	LSV 207 2F
	116	54	84	100	M14	20	12	49.2	31.5	27	6	1.76	LKV 208 2F + H2308

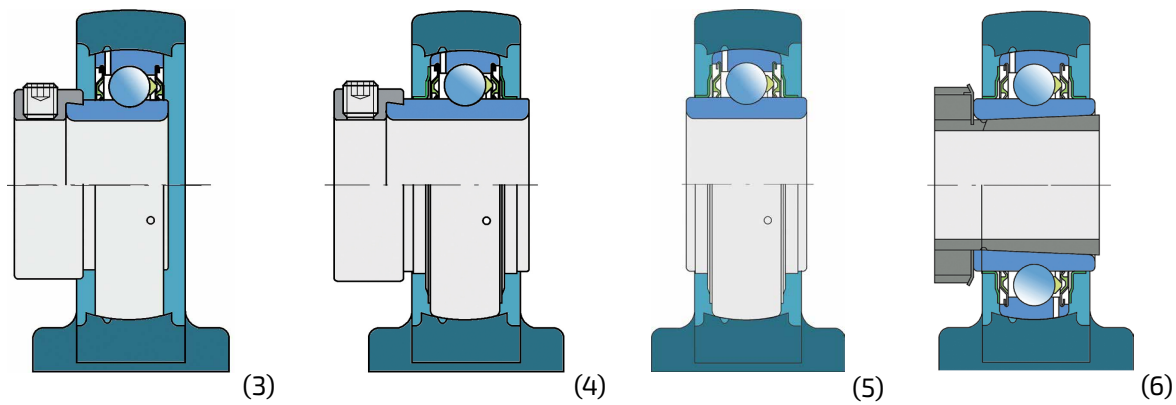


Shaft		Dimensions (mm)									fig.	Mass kg	Designation
d	L	A	J	H	G	G ₁	H ₁	H ₂	A ₁	s ₁			
40	116	54	84	49.2	M14	20	12	100	31.5	25.3	1	0.56	UEV 208 2S
										30.2	2	1.67	LEV 208 2F
										32.7	3	1.70	UYV 208 2S
										34.9	4	1.79	LYV 208 2F
										17	5	1.59	LSV 208 2F
	120	54	90	54.2	M14	25	12	108	33.5	28.5	6	2.04	LKV 209 2F + H2309
45	120	54	90	54.2	M14	25	12	108	33.5	25.8	1	1.80	UEV 209 2S
										30.2	2	1.91	LEV 209 2F
										32.7	3	1.89	UYV 209 2S
										34.9	4	1.91	LYV 209 2F
										17.5	5	1.82	LSV 209 2F
	130	60	94	57.2	M16	25	14	116	35.5	30.5	6	2.53	LKV 210 2F + H2310
50	130	60	94	57.2	M16	25	14	116	35.5	27.6	1	2.18	UEV 210 2S
										32.6	2	2.33	LEV 210 2F
										32.7	3	2.32	UYV 210 2S
										38.1	4	2.51	LYV 210 2F
										20	5	2.24	LSV 210 2F

* All bearing units are available from Ductile Cast Iron.

6.3. Y-Bearing Plummer Block Units with Grey Cast Iron Housing "U"

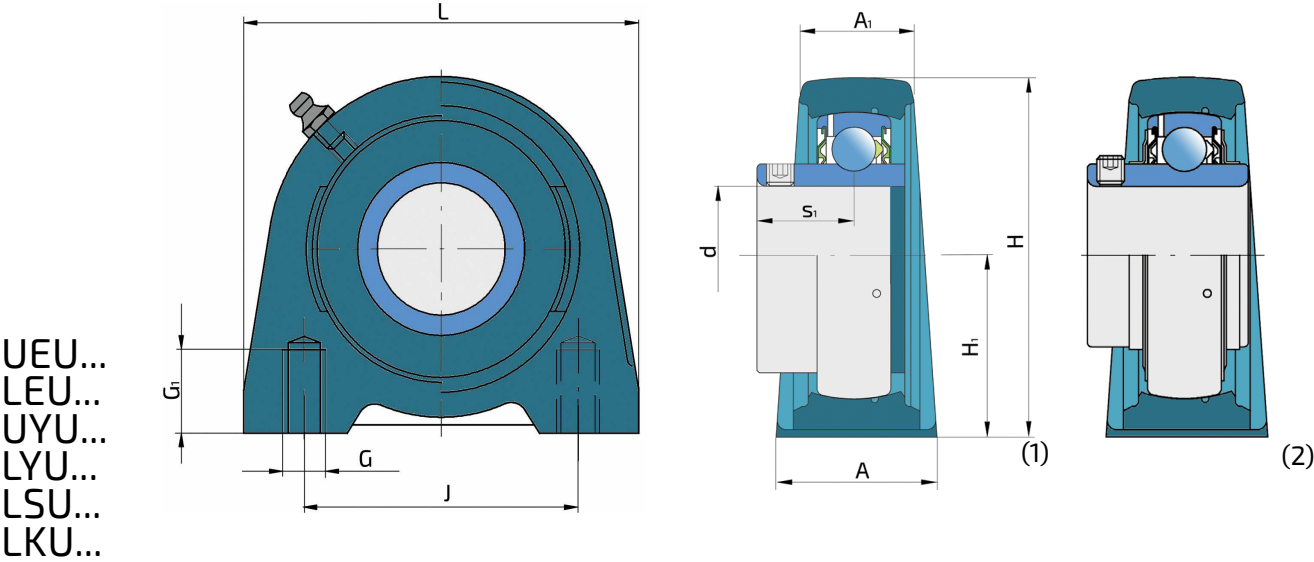

Shaft		Dimensions (mm)								fig.	Mass kg	Designation
d	L	A	A ₁	J	G	G ₁	H	H ₁	s ₁			
20	65	32	21	50.8	M8	14	63.8	33.3	18.3	1	0.52	UEU 204 2S
									18.3	2	0.54	LEU 204 2F
									23.5	3	0.56	UYU 204 2S
									26.6	4	0.59	LYU 204 2F
	70	36	22	50.8	M10	15	69.5	36.5	20	6	0.74	LKU 204 2F + H2305
25	70	36	22	50.8	M10	15	69.5	36.5	19.5	1	0.65	UEU 205 2S
									19.8	2	0.68	LEU 2052F
									23.5	3	0.68	UYU 205 2S
									26.9	4	0.73	LYU 205 2F
									12	5	0.65	LSU 205 2F
	98	40	25	76.2	M10	15	81.4	42.9	22	7	1.13	LKU 205 2F + H2306
30	98	48	25	76.2	M10	15	81.4	42.9	21	1	0.97	UEU 206 2S
									22.2	2	1.03	LEU 206 2F
									26.7	3	1.03	UYU 206 2S
									30.1	4	1.10	LYU 206 2F
									14	5	0.97	LSU 206 2F
	103	45	27	82.6	M10	15	92.1	47.6	24.3	6	1.53	LKU 207 2F + H2307
35	103	45	27	82.6	M10	15	92.1	47.6	23.3	1	1.37	UEU 207 2S
									25.5	2	1.44	LEU 207 2F
									29.4	3	1.49	UYU 207 2S
									32.3	4	1.57	LYU 207 2F
									15.2	5	1.38	LSU 207 2F
	116	48	30	88.9	M12	20	98.2	49.2	27	6	1.76	LKU 208 2F + H2308

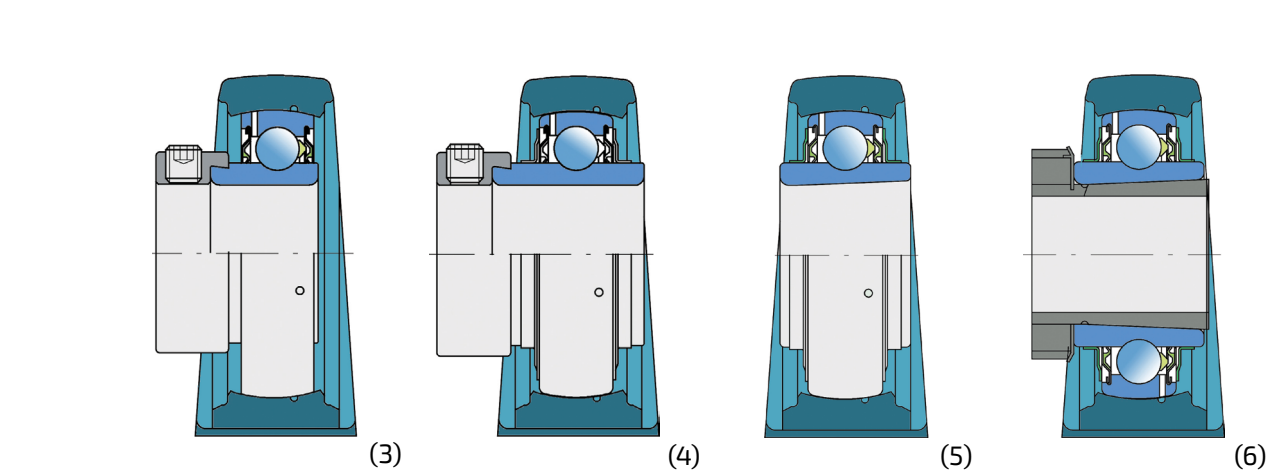


Shaft		Dimensions (mm)								fig.	Mass kg	Designation
d	L	A	A ₁	J	G	G ₁	H	H ₁	s ₁			
40	116	48	30	88.9	M12	20	98.2	49.2	25.3	1	1.56	UEU 208 2S
									30.2	2	1.67	LEU 208 2F
									32.7	3	1.70	UYU 208 2S
									34.9	4	1.79	LYU 208 2F
									17	5	1.59	LSU 208 2F
	120	48	32	95.3	M12	22	106.5	54	28.5	6	2.04	LKU 209 2F + H2309
45	120	48	32	95.3	M12	22	106.5	54	25.8	1	1.80	UEU 209 2S
									30.2	2	1.91	LEU 209 2F
									32.7	3	1.89	UYU 209 2S
									34.9	4	1.91	LYU 209 2F
									17.5	5	1.82	LSU 209 2F
	135	54	34	101.6	M16	25.5	113.2	57.2	30.5	6	2.53	LKU 210 2F + H2310
50	135	54	34	101.6	M16	25.5	113.2	57.2	27.6	1	2.18	UEU 210 2S
									32.6	2	2.33	LEU 210 2F
									32.7	3	2.32	UYU 210 2S
									38.1	4	2.51	LYU 210 2F
									20	5	2.24	LSU 210 2F

* All bearing units are available from Ductile Cast Iron.


6.4. Y-Bearing Flanged Units with Square Grey Cast Iron Housing "F"

UEF...
LEF...
UYF...
LYF...
LSF...
LKF...

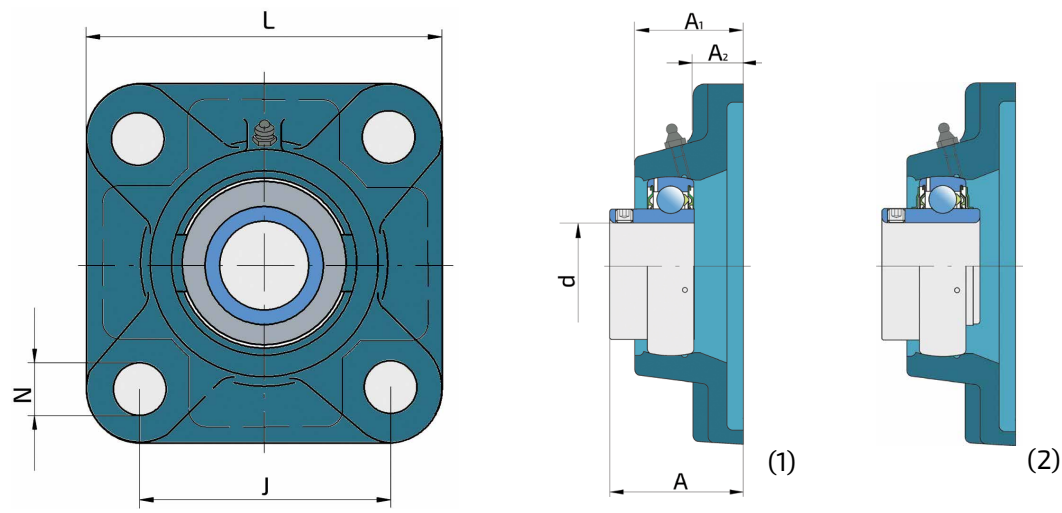


Shaft	Dimensions (mm)						fig.	Mass kg	Designation
d	A	A ₁	A ₂	J	L	N			
17	32.9	26	11	54	76	11.5	1	0.42	UEF 203 2S
	32.9						2	0.44	LEF 203 2F
	39.1						3	0.46	UYF 203 2S
	40.4						4	0.48	LYF 203 2F
20	33.3	25.5	11	64	86	12	1	0.52	UEF 204 2S
	33.3						2	0.54	LEF 204 2F
	38.5						3	0.56	UYF 204 2S
	41.6						4	0.59	LYF 204 2F
25	39	27	12	70	95	12	6	0.73	LKF 205 2F + H2305
	35.5	27	12	70	95	12	1	0.70	UEF 205 2S
	35.8						2	0.73	LEF 205 2F
	39.5						3	0.73	UYF 205 2S
	42.9						4	0.78	LYF 205 2F
	28						5	0.70	LSF 205 2F
30	40	31	13	83	108	12	6	1.05	LKF 206 2F + H2306
	39	31	13	83	108	12	1	0.94	UEF 206 2S
	40.2						2	1.00	LEF 206 2F
	44.7						3	1.00	UYF 206 2S
	48.1						4	1.07	LYF 206 2F
	32						5	0.94	LSF 206 2F
35	43.3	34	13	92	118	14	6	1.35	LKF 207 2F + H2307
	42.3	34	13	92	118	14	1	1.27	UEF 207 2S
	44.5						2	1.34	LEF 207 2F
	48.4						3	1.39	UYF 207 2S
	51.3						4	1.47	LYF 207 2F
	34.3						5	1.28	LSF 207 2F
40	48	36	14	102	130	16	6	1.75	LKF 208 2F + H2308
	46.3	36	14	102	130	16	1	1.68	UEF 208 2S
	51.2						2	1.79	LEF 208 2F
	53.7						3	1.82	UYF 208 2S
	52.2						4	1.91	LYF 208 2F
	38						5	1.71	LSF 208 2F
40	50.5	38	16	105	137	16	6	2.10	LKF 209 2F + H2309

* All bearing units are available from Ductile Cast Iron.

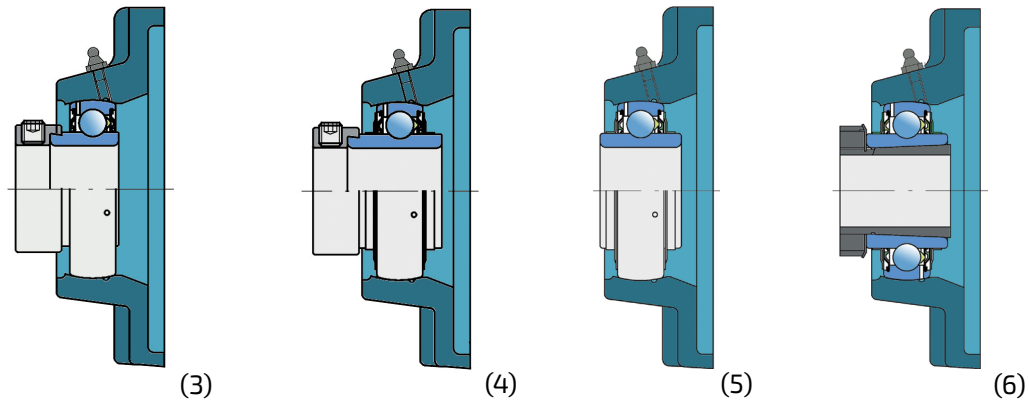


Shaft	Dimensions (mm)						fig.	Mass kg	Designation
d	A	A ₁	A ₂	J	L	N			
45	47.8	38	16	105	137	16	1	2.08	UEF 209 2S
	52.2						2	2.19	LEF 209 2F
	54.7						3	2.19	UYF 209 2S
	56.9						4	2.31	LYF 209 2F
	39.5						5	2.10	LSF 209 2F
50	52.5	40	15	111	143	16	6	2.80	LKF 210 2F + H2310
	49.6	40	15	111	143	16	1	2.43	UEF 210 2F
	54.6						2	2.58	LEF 210 2F
	54.7						3	2.57	UYF 210 2S
	60.1						4	2.76	LYF 210 2F
55	40.5						5	2.49	LSF 210 2F
	57.5	43	17	130	162	19	6	3.60	LKF 211 2F + H2311
	58.4	43	17	130	162	19	2	3.42	LEF 211 2F
	60.9						3	3.39	UYF 211 2S
	68.6						4	3.60	LYF 211 2F
60	45						5	3.39	LSF 211 2F
	63.3	48	18	143	175	19	6	4.60	LKF 212 2F + H2312
	68.7	48	18	143	175	19	2	4.27	LEF 212 2F
	69.3						3	3.84	UYF 212 2F
	75.8						4	4.47	LYC 212 2F
65	65.8	50	22	149	187	19	6	6.00	LKF 213 2F + H2313
	72.9	50	22	149	187	19	2	5.57	LEF 213 2F
	81.6						4	6.10	LYF 213 2F
	73.7	50.3	21.3	152	193	19	6	7.00	LKF 215 2F + H2315
	70.7	50.3	21.3	152	193	19	2	6.20	LEF 214 2F
70	82.6						4	6.70	LYF 214 2F
	76.5	53.6	22.1	159	200	19	6	7.80	LKF 216 2F + H2316
	80.3	53.6	22.1	159	200	19	2	7.00	LEF 215 2F
	88.8						4	7.60	LYF 215 2S
	81.6	54.5	22	165	208	23	2	7.50	LEF 216 2F
80	93.6						4	8.34	LYF 216 2F
	88.6	63.4	23.4	187	235	23	6	11.6	LKF 218 2F + H2318
	94.0	63.4	23.4	187	235	23	2	11.6	LEF 218 2F
	102.8						4	12.5	LYF 218 2F
	107.5	70	25	210	265	27	2	13.9	LEF 220 2F
100	93.6						4	13.5	LYF 220 2F

6.5. Y-Bearing Flanged Units with Oval Grey Cast Iron Housing "N"

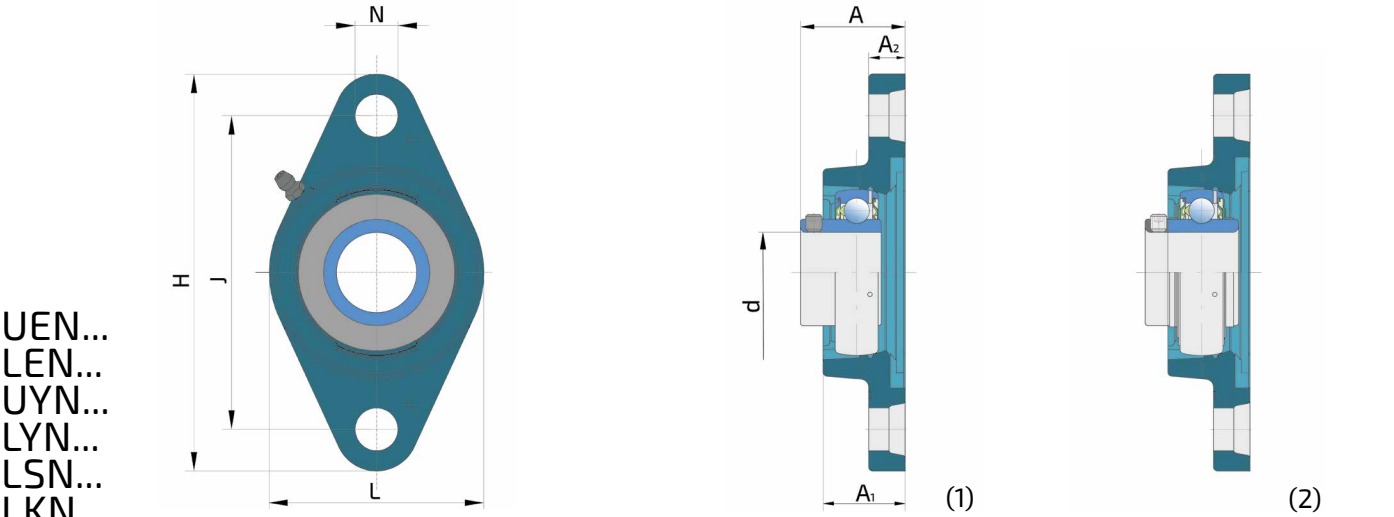

Shaft d	Dimensions (mm)							fig.	Mass kg	Designation
	A	A ₁	A ₂	H	J	L	N			
17	32.9	26	11	98.5	76.5	57	11.5	1	0.37	UEN 203 2S
	32.9							2	0.39	LEN 203 2F
	39.1							3	0.41	UYN 203 2S
	40.4							4	0.43	LYN 203 2F
20	33.3	25.5	11	112	90	60	12	1	0.41	UEN 204 2S
	33.3							2	0.43	LEN 204 2F
	38.5							3	0.45	UYN 204 2S
	41.6							4	0.48	LYN 204 2F
25	36	27	14	130	99	68	16	6	0.66	LKN 205 2F + H2305
	35.5	27	14	130	99	68	16	1	0.58	UEN 205 2S
	35.8							2	0.61	LEN 205 2F
	39.5							3	0.61	UYN 205 2S
	42.9							4	0.66	LYN 205 2F
	28							5	0.56	LSN 205 2F
30	40.5	30.5	14	148	117	80	16	6	0.98	LKN 206 2F + H2306
	39	30.5	14	148	117	80	16	1	0.84	UEN 206 2S
	40.2							2	0.90	LEN 206 2F
	44.7							3	0.90	UYN 206 2S
	48.1							4	0.97	LYN 206 2F
	32							5	0.98	LSN 206 2F
35	44.8	34	16	161	130	96	16	6	1.20	LKN 207 2F + H2307
	42.3	34	16	161	130	96	16	1	1.20	UEN 207 2S
	44.5							2	1.27	LEN 207 2F
	48.4							3	1.32	UYN 207 2S
	51.3							4	1.40	LYN 207 2F
	34.3							5	1.29	LSN 207 2F
40	48.5	36	16	175	144	100	16	6	1.60	LKN 208 2F + H2308
	46.3	36	16	175	144	100	16	1	1.58	UEN 208 2S
	51.2							2	1.69	LEN 208 2F
	53.7							3	1.72	UYN 208 2S
	55.9							4	1.81	LYN 208 2F
	38							5	1.73	LSN 208 2F
45	52.5	38	18	188	148	108	19	7	1.95	LKN 209 2F + H2309


* All bearing units are available from Ductile Cast Iron.

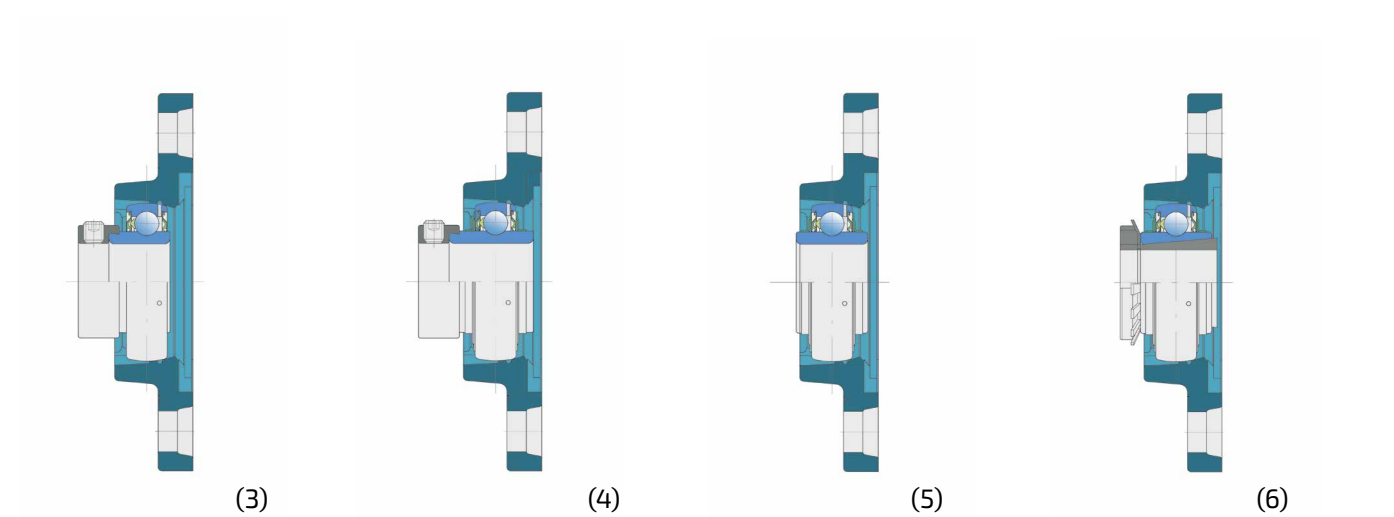


Shaft d	Dimensions (mm)							fig.	Mass kg	Designation
	A	A ₁	A ₂	H	J	L	N			
45	47.8	38	18	188	148	108	19	1	1.73	UEN 209 2S
	52.2							2	1.84	LEN 209 2F
	54.7							3	1.84	UYN 209 2S
	56.9							4	1.96	LYN 209 2F
	39.5							5	1.86	LSN 209 2F
	58.5	40	18	195	157	115	19	6	2.10	LKN 210 2F + H2310
50	49.6	40	18	195	157	115	19	1	1.98	UEN 210 2S
	54.6							2	2.13	LEN 210 2F
	54.7							3	2.12	UYN 210 2S
	60.1							4	2.31	LYN 210 2F
	40.5							5	2.27	LSN 210 2F
	63.5	44	18	220	184	130	19	6	3.26	LKN 211 2F + H2311
55	58.4	44	18	220	184	130	19	2	3.12	LEN 211 2F
	60.9							3	3.09	UYN 211 2S
	68.6							4	3.30	LYN 211 2F
	45							5	3.04	LSN 211 2F
	70	48	18	242	202	140	23	6	4.07	LKN 212 2F + H2312
	68.7	48	18	242	202	140	23	2	4.07	LEN 212 2F
60	69.3							3	3.64	UYN 212 2S
	75.8							4	4.27	LYN 212 2F

6.6. Y-Bearing Flanged Units with Round Grey Cast Iron Housing "G"

UEG...
LEG...
UYG...
LYG...
LSG...
LKG...

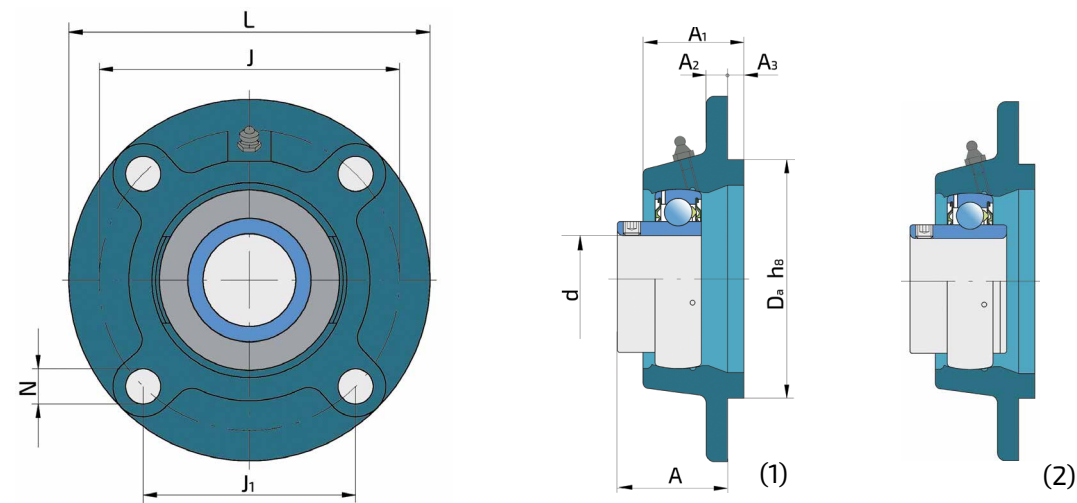


Shaft		Dimensions (mm)								fig.	Mass kg	Designation
d	A	A ₁	A ₂	A ₃	D _a	J	J ₁	L	N			
20	28.3	25.5	7	5	62	78	55.1	100	12	1	0.65	UEG 204 2S
	28.3									2	0.67	LEG 204 2F
	33.5									3	0.69	UYG 204 2S
	36.6									4	0.72	LYG 204 2F
	30	27	7	6	70	90	63.6	115	12	6	0.78	LKG 205 2F + H2305
25	29.5	27	7	6	70	90	63.6	115	12	1	0.95	UEG 205 2S
	29.5									2	0.98	LEG 205 2F
	33.5									3	0.98	UYG 205 2S
	36.9									4	1.03	LYG 205 2F
	20.5									5	0.93	LSG 205 2F
30	32	31	8	8	80	100	70.7	125	12	6	1.45	LKG 206 2F + H2306
	31	31	8	8	80	100	70.7	125	12	1	1.34	UEG 206 2S
	32.2									2	1.40	LEG 206 2F
	36.7									3	1.40	UYG 206 2S
	40.1									4	1.47	LYG 206 2F
35	23									5	1.48	LSG 206 2F
	35.3	34	9	8	90	110	77.8	135	14	6	1.60	LKG 207 2F + H2307
	34.3	34	9	8	90	110	77.8	135	14	1	1.57	UEG 207 2S
	36.5									2	1.64	LEG 207 2F
	40.4									3	1.69	UYG 207 2S
40	43.3									4	1.77	LYG 207 2F
	23.8									5	1.66	LSG 207 2F
	38.5	36	9	10	100	120	84.8	145	14	6	2.10	LKG 208 2F + H2308
	36.3	36	9	10	100	120	84.8	145	14	1	1.78	UEG 208 2S
	41.2									2	1.89	LEG 208 2F
45	43.7									3	1.92	UYG 208 2S
	45.9									4	2.01	LYG 208 2F
	24.5									5	1.93	LSG 208 2F
	38.5	38	14	12	105	132	93.3	160	16	6	2.75	LKG 209 2F + H2309

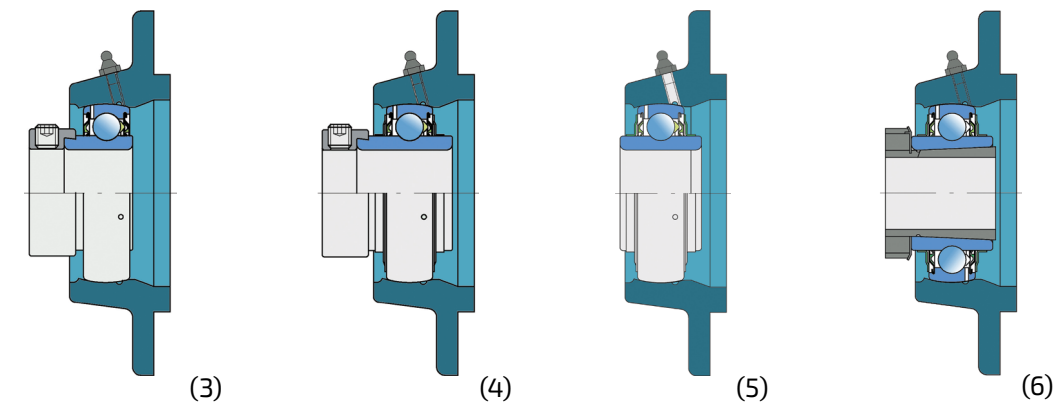

Shaft		Dimensions (mm)								fig.	Mass kg	Designation
d	A	A ₁	A ₂	A ₃	D _a	J	J ₁	L	N			
45	35.8	38	14	12	105	132	93.3	160	16	1	2.53	UEG 209 2S
	40.2									2	2.64	LEG 209 2F
	42.7									3	2.64	UYG 209 2S
	44.9									4	2.76	LYG 209 2F
	24									5	2.66	LSG 209 2F
50	40	40	14	12	110	138	97.6	165	16	6	3.00	LKG 210 2F + H2310
	37.6	40	14	12	110	138	97.6	165	16	1	2.78	UEG 210 2S
	42.6									2	2.93	LEG 210 2F
	42.7									3	2.92	UYG 210 2S
	48.1									4	3.11	LYG 210 2F
55	24									5	3.07	LSG 210 2F
	57	43	15	12	125	150	106.1	185	19	6	3.26	LKG 211 2F + H2311
	46.4	43	15	12	125	150	106.1	185	19	2	4.07	LEG 211 2F
	48.9									3	4.04	UYG 211 2S
	56.6									4	4.25	LYG 211 2F
60	27.5									5	3.99	LSG 211 2F
	59	48	15	12	135	160	113.1	195	19	6	4.07	LKG 212 2F + H2312
	56.7	48	15	12	135	160	113.1	195	19	2	5.02	LEG 212 2F
	57.3									3	4.59	UYG 212 2S
	63.8									4	5.22	LYG 212 2F
65	58.9	50	15	14	145	170	120.2	205	19	2	5.85	LEG 213 2F
	67.6									4	6.59	LYG 213 2F


* All bearing units are available from Ductile Cast Iron.

6.7. Y-Bearing Flanged Units with Round Grey Cast Iron Housing "GS"

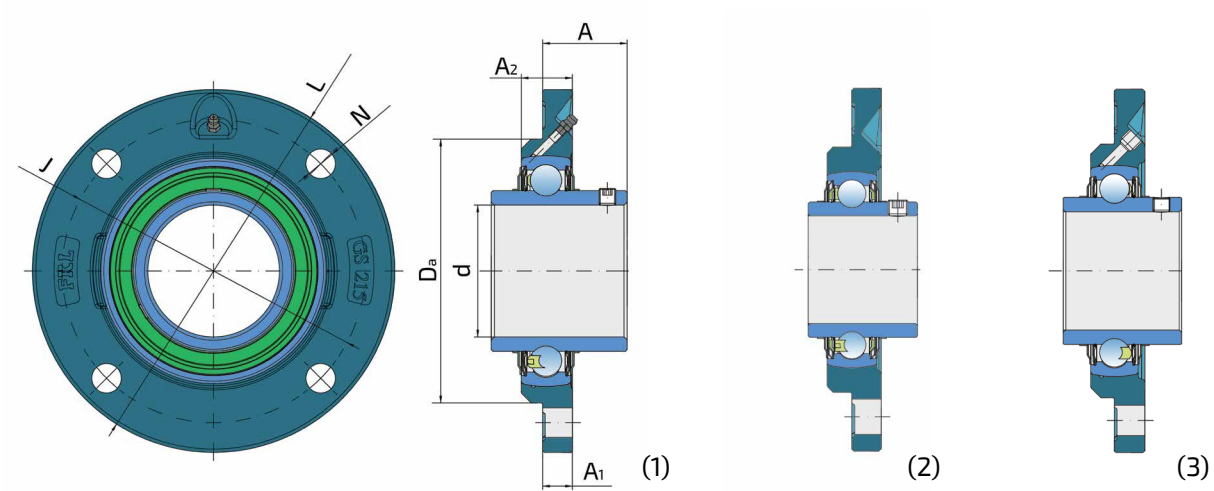

LEGS...

Shaft		Dimensions (mm)						fig.	Mass kg	Designation
d	A	A ₁	A ₂	D _a	L	J	N			
40	29.2	11.5	23	100	145	120	11.5	2	1.656	LEGS 208 2F.H
55	33.4	15	27.5	125	185	150	18	2	3.074	LEGS 211 2F.H
69.9	39.7	18	32	150	215	177	18	3	4.889	LEGS 214 2F
75	44.5	18	32	160	220	184	18	1	5.446	LEGS 215 2F.C77.8
80	51.3	18	31	160	220	184	18	1	5.308	LEGS 216 2F.C82.6

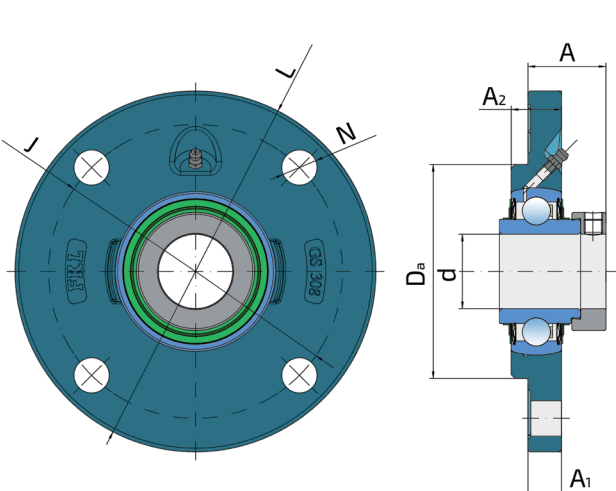


LYGS...


Shaft			Dimensions (mm)					Mass	Designation
d	A	A ₁	A ₂	D _a	L	J	N	kg	
40	41.9	18	27	115	194	158	19	3.721	LYGS 308 2F

* All bearing units are available from Ductile Cast Iron.

6.8. Y-Bearing Take - Up Units with Grey Cast Iron Housings "T"

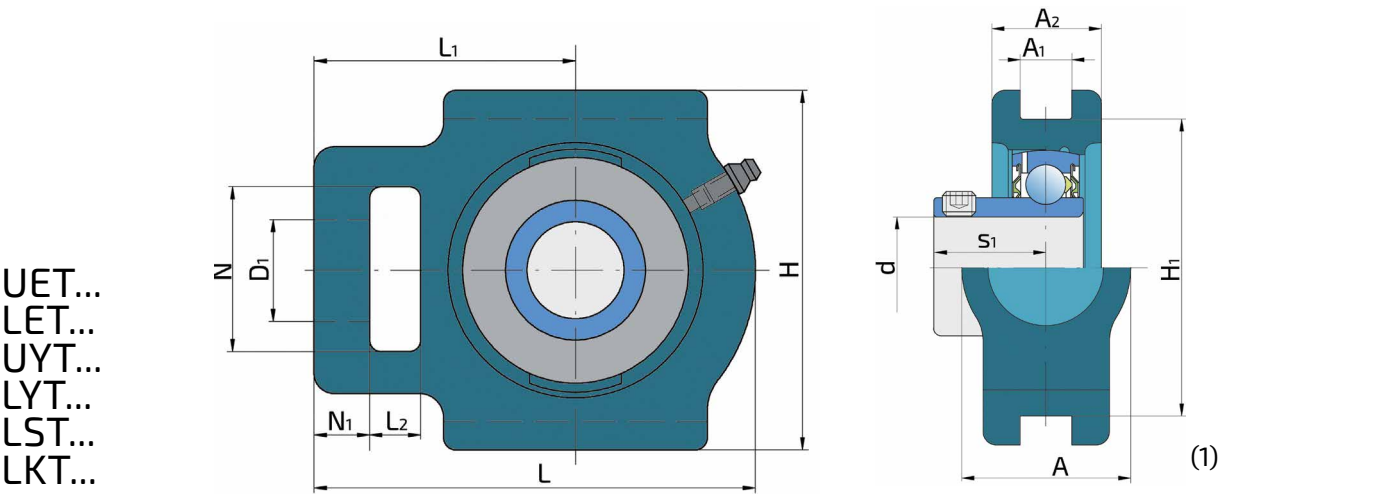

Shaft		Dimensions (mm)											fig.	Mass kg	Designation
d	A	A ₁	A ₂	D ₁	H	H ₁	L	L ₁	L ₂	N	N ₁	s ₁			
20	34	13.5	25	19	92	76	97	62	16	32	10	18.3	1	0.89	UET 204 2S
												18.3	2	0.91	LET 204 2F
												23.5	3	0.93	UYT 204 2S
												26.6	4	0.96	LYT 204 2F
												23.5	6	0.94	LKT 205 2F + H2305
25	34	13.5	25	19	91	76	100	64	16	33	10	19.5	1	0.85	UET 205 2S
												19.8	2	0.88	LET 205 2F
												23.5	3	0.88	UYT 205 2S
												16.9	4	0.93	LYT 205 2F
												11.5	5	0.85	LST 205 2F
30	37	13.5	28	22	104	89	114	70	16	37	10	25	6	1.37	LKT 206 2F + H2306
												21	1	1.21	UET 206 2S
												22.2	2	1.27	LET 206 2F
												26.7	3	1.27	UYT 206 2S
												30.1	4	1.34	LYT 206 2F
35	37	13.5	30	22	103	89	129	78	17	38	12	13	5	1.21	LST 206 2F
												29.5	6	1.66	LKT 207 2F + H2307
												23.3	1	1.50	UET 207 2S
												25.5	2	1.57	LET 207 2F
												29.4	3	1.62	UYT 207 2S
40	49	17.5	33	29	115	101	145	88	19	50	15	32.3	4	1.70	LYT 207 2F
												13.5	5	1.51	LST 207 2F
												31.5	6	2.43	LKT 208 2F + H2308
												25.3	1	2.23	UET 208 2S
												30.2	2	2.34	LET 208 2F
45	49	17.5	35	29	117	101	144	87	19	49	15	32.7	3	2.37	UYT 208 2S
												34.9	4	2.46	LYT 208 2F
												14.5	5	2.26	LST 208 2F
												35	6	2.47	LKT 209 2F + H2309
												35	6	2.47	LKT 209 2F + H2309


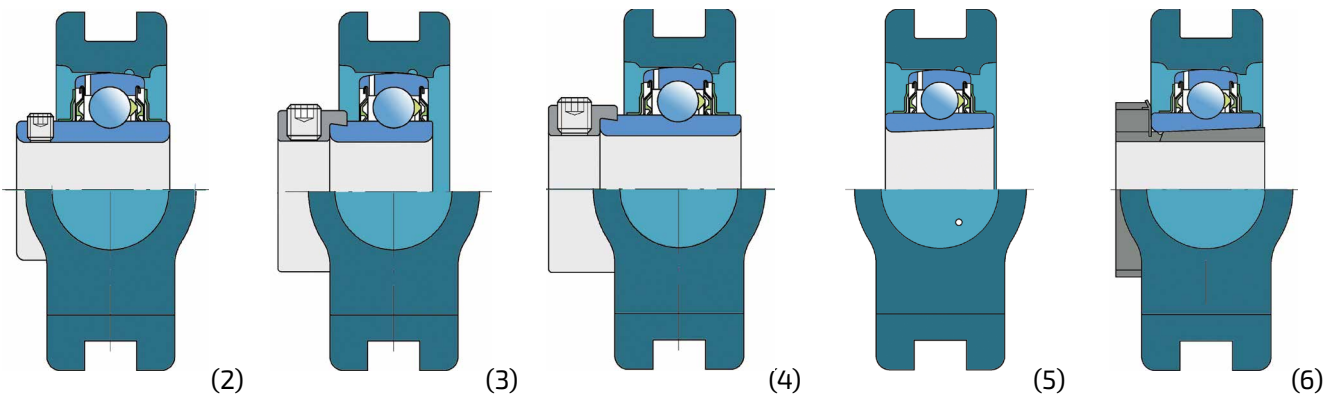


Shaft		Dimensions (mm)											fig.	Mass kg	Designation
d	A	A ₁	A ₂	D ₁	H	H ₁	L	L ₁	L ₂	N	N ₁	s ₁			
45	49	17.5	35	29	117	101	144	87	19	49	15	25.8	1	2.23	UET 209 2S
												30.2	2	2.34	LET 209 2F
												32.7	3	2.34	UYT 209 2S
												34.9	4	2.46	LYT 209 2F
												15	5	2.25	LST 209 2F
50	49	17.5	36	29	117	101	149	90	19	49	16	39.5	6	2.63	LKT 210 2F + H2310
												27.6	1	2.28	UET 210 2S
												32.6	2	2.43	LET 210 2F
												32.7	3	2.42	UYT 210 2S
												38.1	4	2.61	LYT 210 2F
55	64	27	41	35	146	130	171	106	25	64	19	15.5	5	2.34	LST 210 2F
												42.5	6	4.16	LKT 211 2F + H2311
												33.4	2	4.02	LET 211 2F
												35.9	3	3.99	UYT 211 2S
												43.6	4	4.20	LYT 211 2F
60	64	22	41	35	146	130	171	106	25	64	19	16.5	5	3.99	LST 211 2F

* All bearing units are available with Ductile Cast Iron.

6.9. Y-Bearing Flanged Units with Round Pressed Steel Housing "C"

UEC...
LEC...
UYC...
LYC...

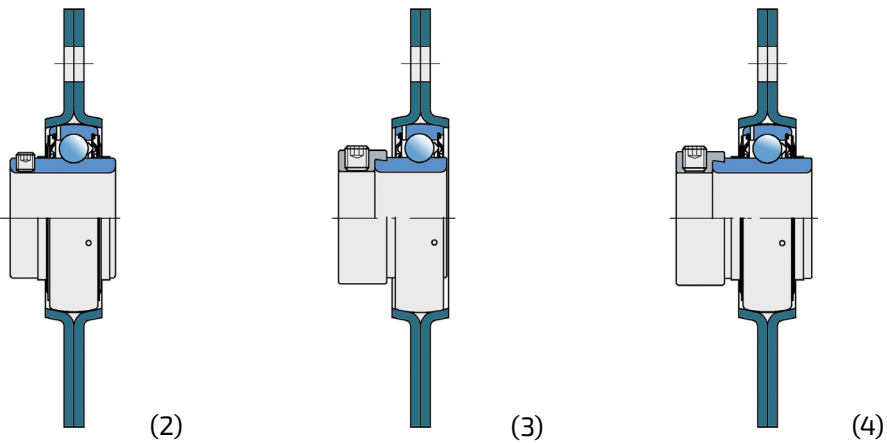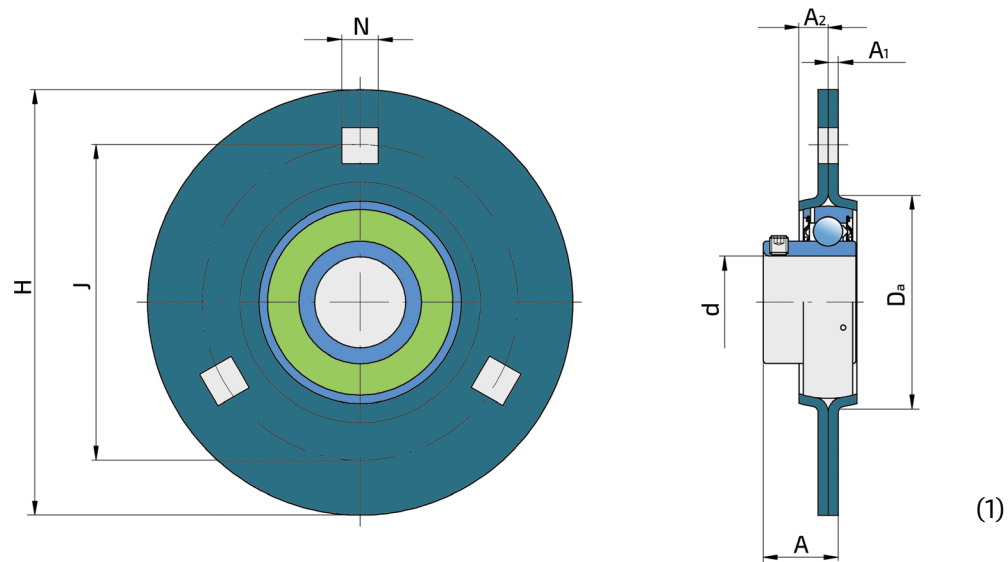


Shaft		Dimensions (mm)						Perm.load (kN)		fig.	Mass kg	Designation
d	A	A ₁	A ₂	D _a	H	J	N	rad.	axial			
17	17.9	2	7	49	81	63	7.1	2.5	1.2	1	0.20	UEC 203 2S
	17.9									2	0.22	LEC 203 2F
	24.1									3	0.24	UYC 203 2S
	24.3									4	0.26	LYC 203 2F
20	20.3	2	8	55	91	71.5	8.7	3.3	1.6	1	0.28	UEC 204 2S
	20.3									2	0.30	LEC 204 2F
	25.5									3	0.32	UYC 204 2S
	28.6									4	0.35	LYC 204 2F
25	21.5	2	9	60	95	76	8.7	3.6	1.8	1	0.33	UEC 205 2S
	21.8									2	0.36	LEC 205 2F
	25.5									3	0.36	UYC 205 2S
	28.9									4	0.41	LYC 205 2F
30	23.5	2.5	9.5	71	112	90.5	10.5	5.0	2.5	1	0.52	UEC 206 2S
	24.7									2	0.58	LEC 206 2F
	29.2									3	0.58	UYC 206 2S
	32.6									4	0.65	LYC 206 2F
35	25.8	2.5	10.5	81	122	100	10.5	6.5	3.2	1	0.69	UEC 207 2S
	28									2	0.76	LEC 207 2F
	31.9									3	0.81	UYC 207 2S
	34.8									4	0.89	LYC 207 2F

Shaft		Dimensions (mm)						Perm.load (kN)		fig.	Mass kg	Designation
d	A	A ₁	A ₂	D _a	H	J	N	rad.	axial			
40	28.8	3.5	11	91	148	119	13.5	7.5	3.7	1	1.16	UEC 208 2S
	33.7									2	1.27	LEC 208 2F
	36.2									3	1.30	UYC 208 2S
	38.4									4	1.39	LYC 208 2F
45	29.3	3.5	11.5	96	149	120.5	13.5	8.3	4.1	1	1.23	UEC 209 2S
	33.7									2	1.34	LEC 209 2F
	36.2									3	1.34	UYC 209 2S
	38.4									4	1.46	LYC 209 2F
50	31.6	4	12	102	155	127	13.5	9	4.5	1	1.44	UEC 210 2S
	36.6									2	1.59	LEC 210 2F
	36.7									3	1.58	UYC 210 2S
	42.1									4	1.77	LYC 210 2F
55	37.4	4	12.5	112	167	138	13.5	9.5	4.8	2	2.02	LEC 211 2F
	39.9									3	1.99	UYC 211 2S
	47.6									4	2.20	LYC 211 2F
	43.7	4	13	122	176	148	13.5	9.5	4.8	2	2.67	LEC 212 2F
60	44.3									3	2.24	UYC 212 2S
	50.8									4	2.87	LYC 212 2F


* Housing C 208 and larger have 4 locking holes.
* All combinations with other types of Y bearings are possible.

6.10. Y-Bearing Flanged Units with Triangular Pressed Steel Housing "D"

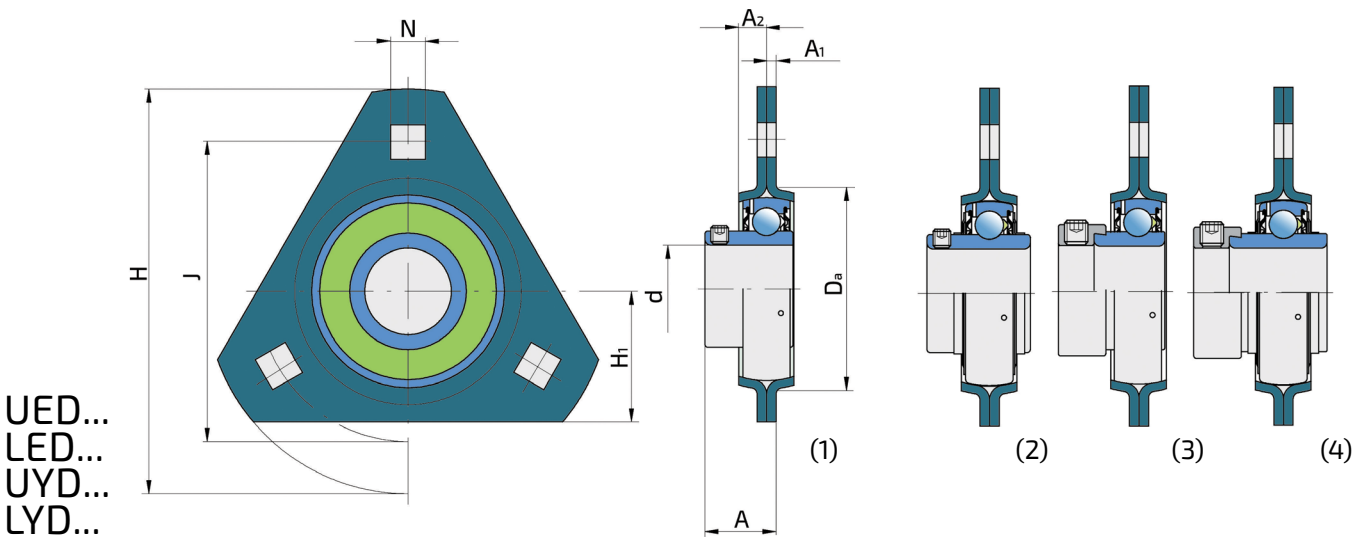

Shaft		Dimensions (mm)							Perm.load (kN)		fig.	Mass kg	Designation
d	A	A ₁	A ₂	D _a	H	H ₁	J	N	rad.	axial			
25	21.5	2	9	60	95	34	76	8.7	3.6	1.8	1	0.31	UED 205 2S
	21.8										2	0.34	LED 205 2F
	25.5										3	0.34	UYD 205 2S
	28.9										4	0.39	LYD 205 2F
30	23.5	2.5	9.5	71	112	38	90.5	10.5	5.0	2.5	1	0.43	UED 206 2S
	24.7										2	0.49	LED 206 2F
	29.2										3	0.49	UYD 206 2S
	32.6										4	0.56	LYD 206 2F
35	25.8	2.5	10.5	81	122	45	100	10.5	6.5	3.2	1	0.65	UED 207 2S
	28										2	0.72	LED 207 2F
	31.9										3	0.77	UYD 207 2S
	34.8										4	0.85	LYD 207 2F

6.11. Y-Bearing Flanged Units with Oval Pressed Steel Housing "P"

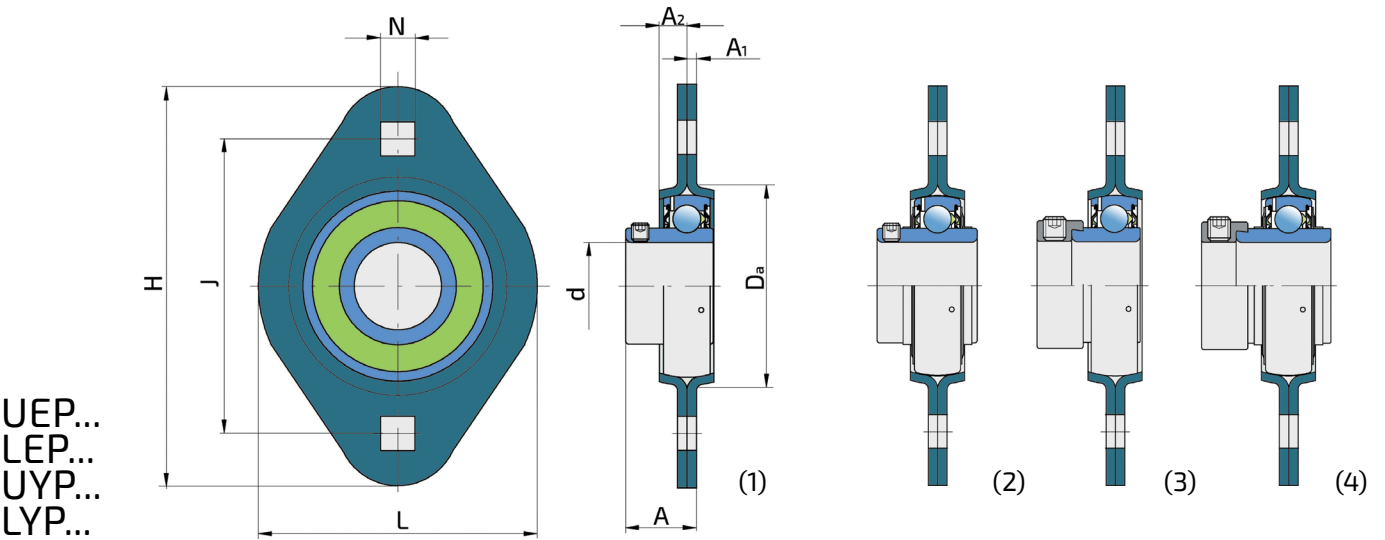

Shaft		Dimensions (mm)							Perm.load (kN)		fig.	Mass kg	Designation
d	A	A ₁	A ₂	D _a	H	L	J	N	rad.	axial			
17	17.9	2	7	49	81	59	63	7.1	2.5	1.2	1	0.15	UEP 203 2S
	17.9										2	0.17	LEP 203 2F
	24.1										3	0.19	UYP 203 2S
	24.3										4	0.21	LYP 203 2F
20	20.3	2	8	55	91	67	71.5	8.7	3.3	1.6	1	0.21	UEP 204 2S
	20.3										2	0.23	LEP 204 2F
	25.5										3	0.25	UYP 204 2S
	28.6										4	0.28	LYP 204 2F
25	21.5	2	9	60	95	71	76	8.7	3.6	1.8	1	0.26	UEP 205 2S
	21.8										2	0.29	LEP 205 2F
	25.5										3	0.29	UYP 205 2S
	28.9										4	0.34	LYP 205 2F
30	23.5	2.5	9.5	71	112	84	90.5	10.5	5.0	2.5	1	0.40	UEP 206 2S
	24.7										2	0.46	LEP 206 2F
	29.2										3	0.46	UYP 206 2S
	32.6										4	0.53	LYP 206 2F
35	25.8	2.5	10.5	81	122	94	100	10.5	6.5	3.2	1	0.60	UEP 207 2S
	28										2	0.67	LEP 207 2F
	31.9										3	0.72	UYP 207 2S
	34.8										4	0.80	LYP 207 2F
40	28.8	3.5	11	91	148	100	119	13.5	7.5	3.7	1	0.83	UEP 208 2S
	33.7										2	0.94	LEP 208 2F
	36.2										3	0.97	UYP 208 2S
	38.4										4	1.06	LYP 208 2F

* All combinations with other types of Y bearings are possible.

* All combinations with other types of Y bearings are possible.

Agricultural Bearing Units - Special Solutions

7.1. Bearing Units Type 2TB 70

7.2. Bearing Units Type 2TC and 2PC..... 71

7.3. ARMOR Bearing Units 72



7.1. Bearing Units Type 2TB

By the requests of the agricultural equipment manufacturers in addition to the standard Y-program FKL D00 Temerin has developed special versions of bearings with a variety of improvements in construction, primarily in order to extend the life of bearing to the end-users satisfaction. In agriculture, good sealing means durability and accordingly LEFN 2xx 2TB series of bearing units with better sealing have been developed. They carry an additional designation 2TB, but have the same size as series LEFN 2xx 2F.

Triple-lip seals (2T)

Instead of one-lip seals triple-lip seals are installed and this solution has been implemented for number of years. Seal has a steel reinforcement which is further zinc galvanized so it has good anti corrosion protection. Strong triple lips are made of NBR rubber resistant to lubricants and fuels. Between the lips there are 3 compartments for grease storage, which retain impurities, this preventing the penetration of dirt to the balls. More detailed info about 2T sealing see on page 10.

Protective flinger

As additional protection from rough dirt (grass, wires, strings,...) and mechanical impact of foreign matters, increased thickness 1,5-2 mm reinforced rubber protection flinger was added. Increased thickness and surface protection ensure longer operation life despite the influence of various external atmospheric agents (water, acids,...).

Flinger is fitted interference a solid flap on the inner ring so it provides a good additional protection. Flinger has protection function to the seal. Since mounted in front of it, prevents rough dirt penetration and provide protection against mechanical impact.

Lubrication

These series are enabled for additional lubrication by means of lubricators. Cone countersinks are made at angle of 120°, one per side. This results in better flow and entry of grease which makes easier to bring grease in the contact zone of balls and raceways. Grease flow is better due to the increased diameter of the intake grease hole.

Housing material

Material selected for 2TB housings is Grey Cast Iron EN-GJL-200 but also can be ductile iron EN-GJS-500-7 which has many advantages comparing to Grey Cast Iron in terms of the strength of structure, resistance to shocks, vibrations, abrasion and therefore longer life span.

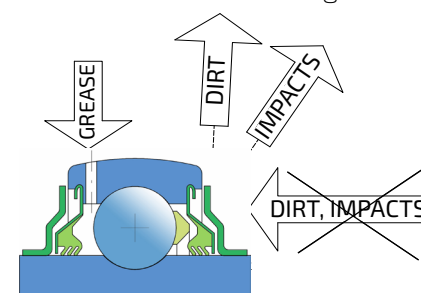


Fig.15. Sealing 2TB

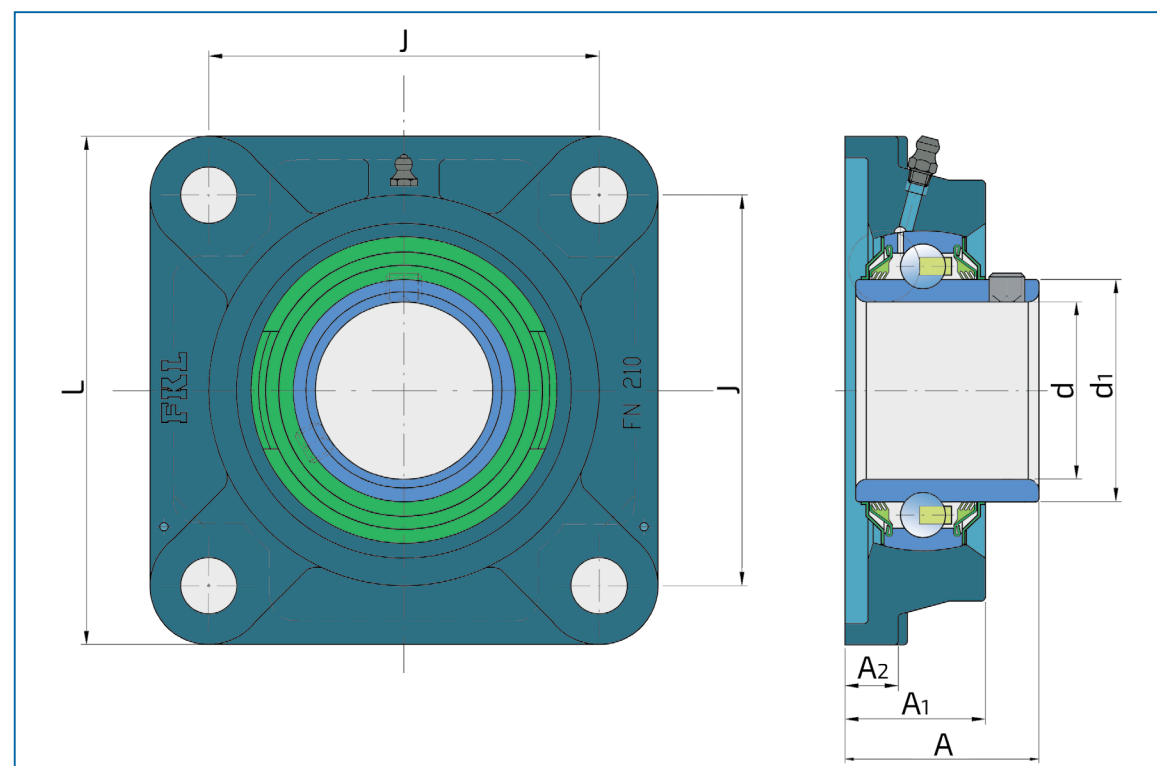


Fig. 16. LEFN 210 2TB

7.2. Bearing Units Type 2TC and 2PC

FKL D00 Temerin has developed another series of bearing units for agriculture named LEFN 2xx 2TC and 2PC.

Bearing units for disc harrows, rollers and similar reduced tillage machines, where the grass is present in excessive amounts and high probability for the machine to encounter problems with leftover ropes or winded wires on rotating shaft which tend to destroy the sealing (and a whole bearing) are developed using tin caps protection (C designation in suffix).

Bearing Units Type 2TC

Triple-lip seals (2T)

Instead of one-lip seals triple-lip seals are installed and this solution has been implemented for number of years. Seal has a steel reinforcement which is further zinc galvanized so it has good anti corrosion protection. Strong triple lips are made of NBR rubber resistant to lubricants and fuels. Between the lips there are 3 compartments for grease storage, which retain impurities, this preventing the penetration of dirt to the balls. More detailed info about 2T sealing see on page 10.

Cap

As additional protection from rough dirt (grass, wire, soil, mud,...) and mechanical impact of foreign matter e.g. rubble, protective sheet of the series 2TB, has been replaced with an increased thickness steel cap (1,5-2 mm), that covers the whole front of the bearing unit. Increased thickness and surface protection improves longer operation life. The tin is mounted below the cast housing tightening screw. It also has protective function for the triple and five-lips seal, because it is mounted in front of the seal and prevents penetration of rough dirt

to the seal and protects it from mechanical impact.

Lubrication

These series are enabled for additional lubrication by means of lubricators.

Cone countersinks are made at angle of 120°, one per side. This results in a better flow and entry of grease which makes easier to bring grease in the contact zone of balls and raceways.

Grease flow is better due to the increased diameter of the intake grease hole and number of holes is increased from 2 to 3.

Housing material

Material selected for 2TC housings is Grey Cast Iron EN-GJL-200 but also can be ductile iron EN-GJS-500-7 which has many advantages comparing to Grey Cast Iron in terms of the strength of structure, resistance to shocks, vibrations, abrasion and therefore longer life span. Color of these housings can be standard factory blue or black.

Bearing Units Type 2PC

Bearing units named LEFN 2xx 2PC have the same performance as bearing units LEFN 2xx 2TC with only difference regarding the sealing. Instead of triple-lip seal this unit has five-lip seal.

Five-lip seal (2P)

Instead triple-lips seals, they are incorporated with newly developed seal, five-lip seal. Seal has a steel reinforcement which is zinc galvanized and has good corrosion protection. Five strong lips are made out of new type NBR rubber, resistant to oils and fuels, and resistant to high temperatures above 110°C. More detailed info about 2P sealing see on page 10.


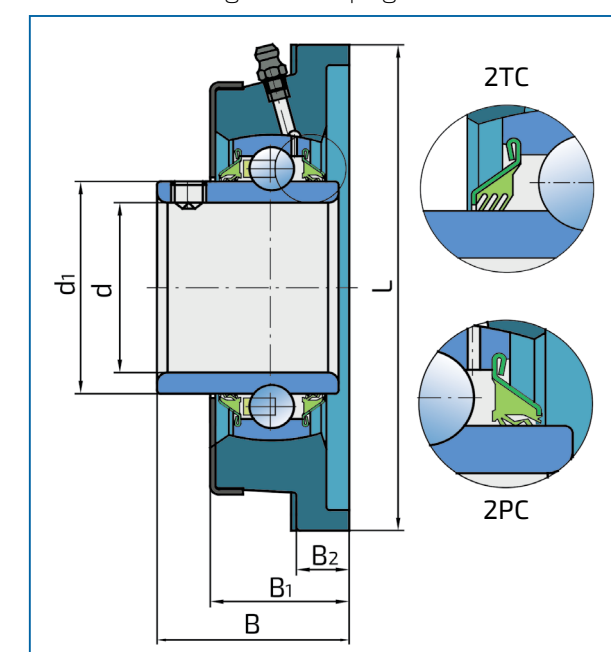


Fig.17. Bearing units type 2TC and 2PC

7.3. ARMOR Bearing Unit

ARMOR LEFG 2xx TDT Bearing Unit
PREMIUM CLASS SOLUTION

One of the best sealing system for application in agricultural machinery!

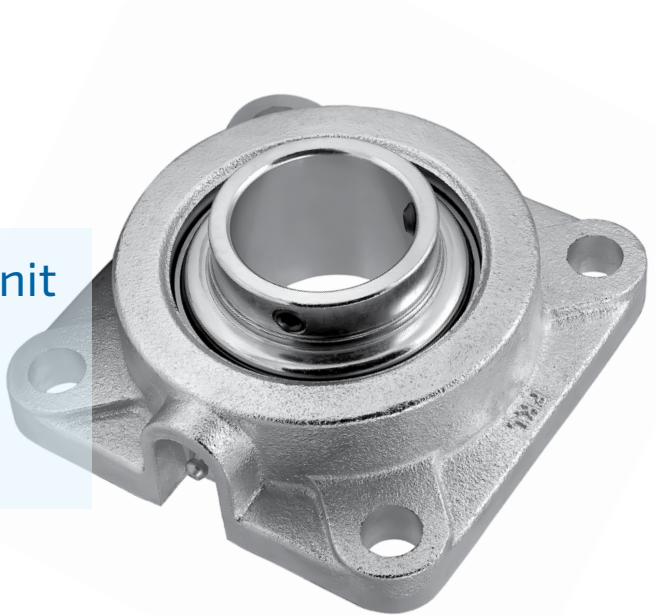

Armor Bearing Unit advantages:

- 1** Ductile Cast Iron housing has two and a half times higher tensile strength than Grey Cast Iron housing.

2 Iron arc provides perfect protection of the grease nipple.

3 Anti-corrosion coating of housing, inner ring and metal cover.

4 Two oppositely positioned lubrication holes, on the housing and on the bearing outer ring as well.

5 The unique combination of six-lip sealing by front side of the bearing and triple-lip sealing by base side presents one of the best sealing system for application on agricultural machinery.
- 6** Additional 1 mm metal cover provides reliable mechanical protection.



7 The bearing mounting groove is turned to the base side of the housing, which significantly decreases contact of the bearing with mud and other impurities from the front side.

8 Locking pin on the outer ring prevents its rotating and ensures the proper way of installation of the bearing into the housing.

Available Armor Bearing Unit sizes 206, 207, 208, 209, 210, 211, 212, 214.

Designation	Material	Yield strength (MPa)	Tensile strenght (MPa)	Elongation (%)
EN-GJL-200	Grey Cast Iron	130	200	0,5
EN-GJS-500-7	Ductile Cast Iron	320	500	7

ARMOR Bearing Unit
PREMIUM CLASS SOLUTIONS

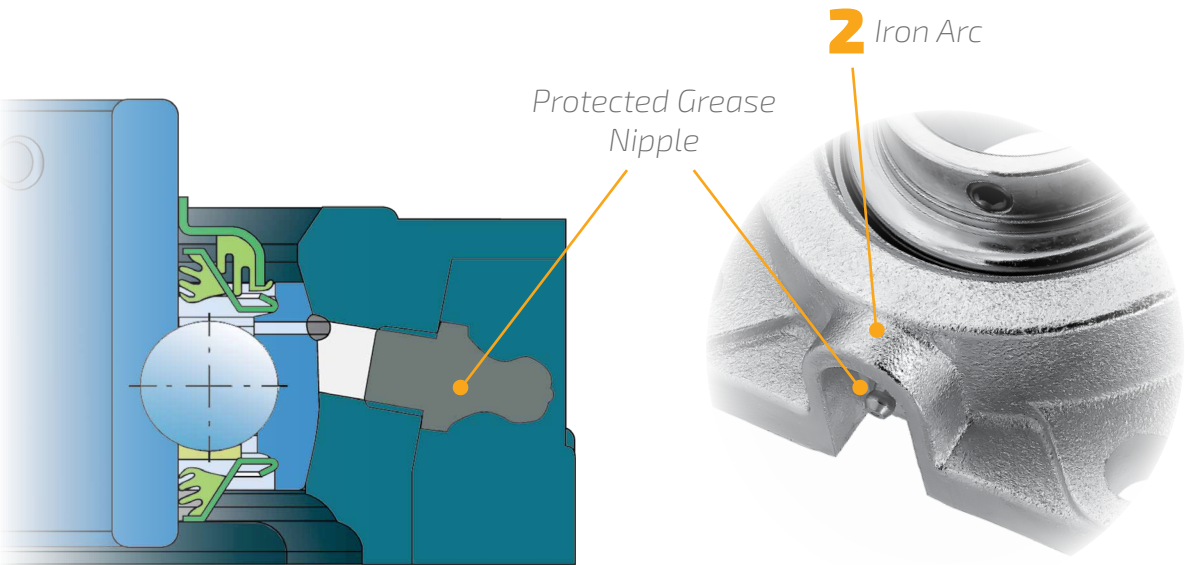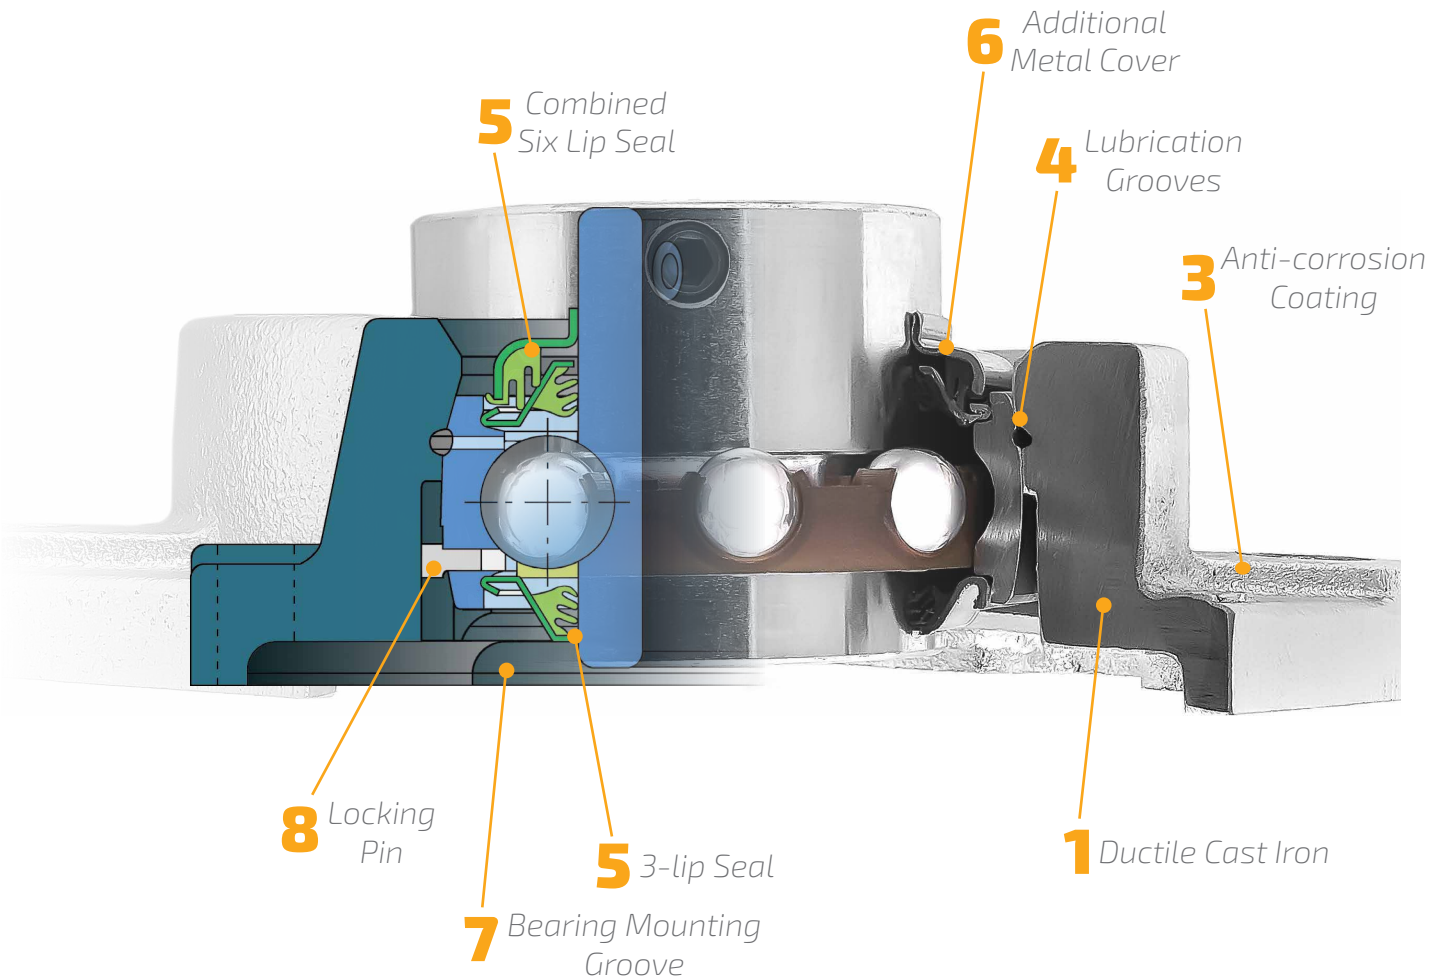

Agricultural Bearings and Bearing Units

8.1. Agricultural Bearings

8.1.1. Round and Square Bore Series with Spherical Outer Ring

- Non-Relubricable Type 76

8.1.2. Round and Square Bore Series with Cylindrical Outer Ring

- Non-Relubricable Type 78

8.1.3. Round Bore Series with Spherical and Cylindrical Outer Ring

- Relubricable Type 80

8.1.4. Square Bore Series with Spherical and Cylindrical Outer Ring

- Relubricable Type 82

8.1.5. Hexagonal Bore Series with Spherical and Cylindrical Outer Ring

..... 84

8.2. Agricultural Bearing Units

8.2.1. Square Bore Series 86


8.2.2. Round Series 88

8.3. Agricultural Bearings and Bearing Units Overview 89




8.1. Agricultural Bearings

8.1.1. Round and Square Bore Series with Spherical Outer Ring
- Non-Relubricable Type




...PPB

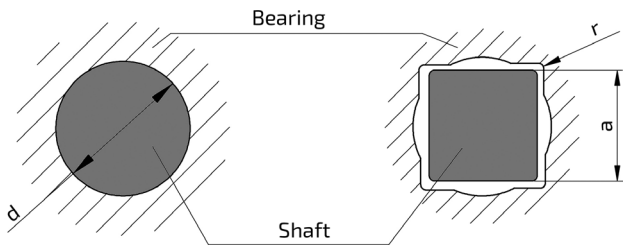

Dimensions (mm)									
Bore d		D		B		C		d ₁	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1.5004	38.11	3.1496	80	1.691	42.96	0.709	18	2.047	52
1.1878	30.17			1.188	30.18	1.188	30.18		
1.1877	30.17			1.188	30.18	0.709	18		
1.5005	38.113			1.691	42.96	1.185	30.1		
1.7717	45	3.3465	85	1.188	30.2	1.188	30.18	2.228	56.6
1.5354	39			1.188	30.18	1.188	30.18		
1.7811	45.24			1.438	36.53	0.866	22		
1.9382	49.23	3.5433	90	1.188	30.18	1.188	30.18	2.461	62.5
1.7850	45.34			1.188	30.18	1.188	30.18		
2.1882	55.58	3.9370	100	1.313	33.34	1.313	33.34	2.721	69.1


Shaft size a									
1.1811	30	3.1496	80	1.438	36.5	0.709	18	2.047	52
0.9843	25	3.1496	80			0.709	18		
1.1811	30	3.1496	80			1.185	30.1		
1	25.4	3.1496	80			1.188	30.18		
0.9055	23	3.3759	85.75			1.185	30.1		
1.1811	30	3.3759	85.75			1.188	30.18		
7/8	22.2	3.1496	80			0.709	18		
7/8	22.2	3.4386	87.34			1.188	30.18		
1 1/8	28.6	3.4386	87.34			1.188	30.18		
1.2913	32.8	3.3465	85	1.438	36.5	1.189	30.2	2.228	56.6
1.2913	32.8	3.4385	87.34	1.438	36.5	1.189	30.2		
1.2913	32.8	3.3465	85	1.438	36.5	0.748	19		
1.1811	30	3.5433	90	1.772	45	1.142	29		
1 1/8	28.6	3.5433	90	1.188	30.18	1.188	30.18	2.461	62.5
1 1/8	28.6	3.5433	90	1.438	36.53	1.188	30.18		
1.5315	38.9	3.9370	100	1.313	33.34	1.313	33.34	2.720	69.1
1 1/2	38.1	4.1248	104.77	1.75	44.45	1.438	36.53		
1.5315	38.9	4.0772	103.56	1.75	44.5	1.437	36.5		

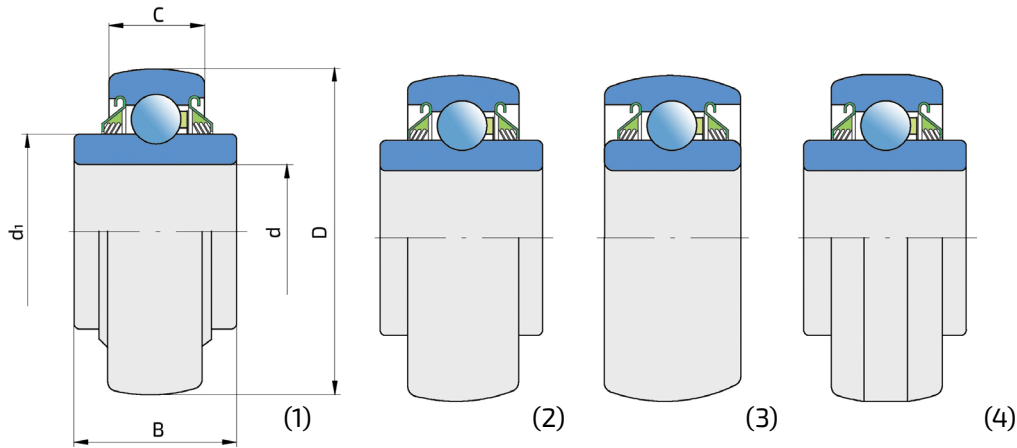

Load ratings (kN)						ROUND BORE	
C _{dyn}		C _o		Mass		Designation	Type
lbs.	kN	lbs.	kN	lbs.	kg		
7300	32.5	4400	19.8	1.59	0.72	W 208PPB2	1
				1.60	0.73	W 208PPB4	3
				1.41	0.64	W 208PPB7	1
				1.50	0.68	W 208PPB23	1
7300	32.5	4600	20.4	1.44	0.65	W 209PPB2	3
				1.65	0.75	W 209PPB4	3
				1.34	0.62	W 209PPB11	1
7800	35.0	5200	23.2	1.56	0.71	W 210PPB2	3
				1.75	0.79	W 210PPB5	3
9700	43.5	6500	29	2.13	0.97	W 211PPB2	3


SQUARE BORE							
7300	32.5	4400	19.8	1.48	0.67	W 208PPB5	1
				1.59	0.72	W 208PPB6	1
				1.74	0.79	W 208PPB8	2
				1.90	0.86	W 208PPB9	2
				2.20	1.00	W 208PPB11	4
				1.98	0.90	W 208PPB12	4
				1.62	0.74	W 208PPB13	1
				2.05	0.93	W 208PPB18	4
				1.87	0.85	W 208PPB19	4
7300	32.5	4600	20.4	1.75	0.79	W 209PPB5	1
				1.85	0.84	W 209PPB7	4
				1.65	0.75	W 209PPB8	1
				2.51	1.14	W 209PPB30	4
7800	35.0	5200	23.2	2.11	0.96	W 210PPB4	3
				2.25	1.02	W 210PPB6	1
9700	43.5	6500	29.0	2.66	1.21	W 211PPB3	3
				4.10	1.86	W 211PPB5	4
				3.83	1.74	W 211PPB6	4

8.1.2. Round and Square Bore Series with Cylindrical Outer Ring
- Non-Relubricable Type

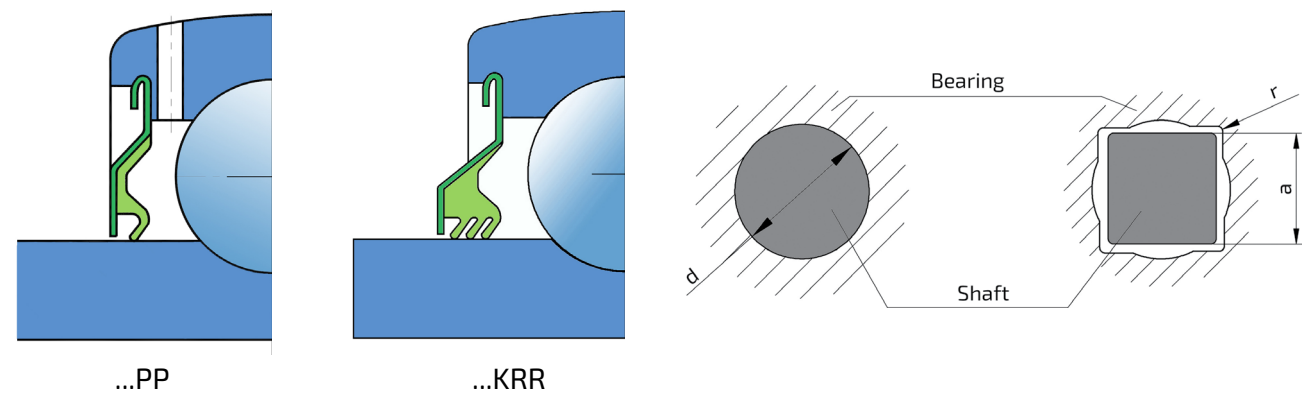

Dimensions (mm)									
Bore d		D		B		C		d ₁	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
0.6279	15.95	2	50.8	0.591	15	0.591	15	1.083	27.5
1.5311	38.89	3.1496	80	1.083	27.5	0.827	21	2.024	51.4
1.1878	30.17	3.1496	80	1.188	30.18	1.188	30.18	2.047	52
1.9382	49.23	3.5433	90	1.188	30.18	1.188	30.18	2.461	62.5
2.1882	55.58	3.9370	100	1.313	33.34	1.312	33.34	2.720	69.1


Shaft size a									
0.9843	25	2.8346	72	1.772	45	0.945	24	1.815	46.1
1 3/16	30	3.1496	80	1.437	36.5	0.709	18	2.047	52
1	25.4					0.709	18		
1.1811	30					1.185	30.1		
1.1811	30					0.709	18		
1.1811	30	3.3465	85	1.772	45	1.188	30.18	2.228	56.6
1.1811	30	3.5433	90	1.188	30.18	1.188	30.18	2.461	62.5
1.5315	38.9	3.9370	100	1.313	33.34	1.313	33.34	2.720	69.1
1.5315	38.9	4	101.6	1.75	44.5	1.437	36.5		

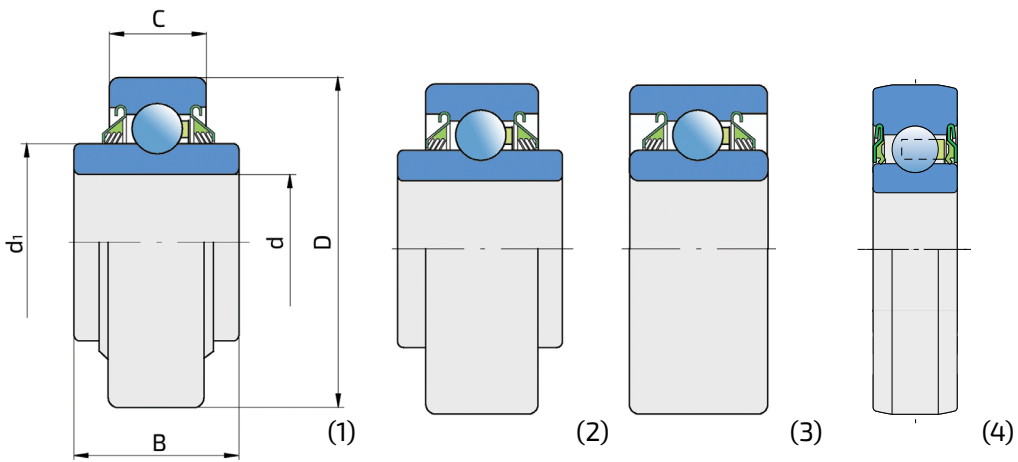


Load ratings (kN)						ROUND BORE	
C _{dyn}		C _o		Mass		Designation	Type
lbs.	kN	lbs.	kN	lbs.	kg		
2855	12.7	1470	6.55	0.55	0.25	203KRR3	4
5306	23.6	4270	19	1.01	0.46	208KRR4	2
7300	32.5	4400	19.8	1.68	0.76	W 208PP4	3
7800	35.0	5200	23.2	2.67	1.21	W 210PP2	3
				2.33	1.06	W 211PP2	3

						SQUARE BORE	
5700	25.5	3400	15.3	1.65	0.75	W 207PP3	1
7300	32.5	4400	19.8	1.50	0.68	W 208PP5	1
				1.62	0.73	W 208PP6	1
				1.66	0.75	W 208PP8	1
				2.50	0.68	W 208PP20	1
7300	32.5	4600	20.4	2.16	0.98	W 209PP3	2
7800	35.0	5200	23.2	2.67	1.21	W 210PP4	3
9700	43.5	6500	29.0	2.67	1.21	W 211PP3	3
				3.48	1.58	W 211PP5	1

8.1.3. Round Bore Series with Spherical and Cylindrical Outer Ring
– Relubricable Type

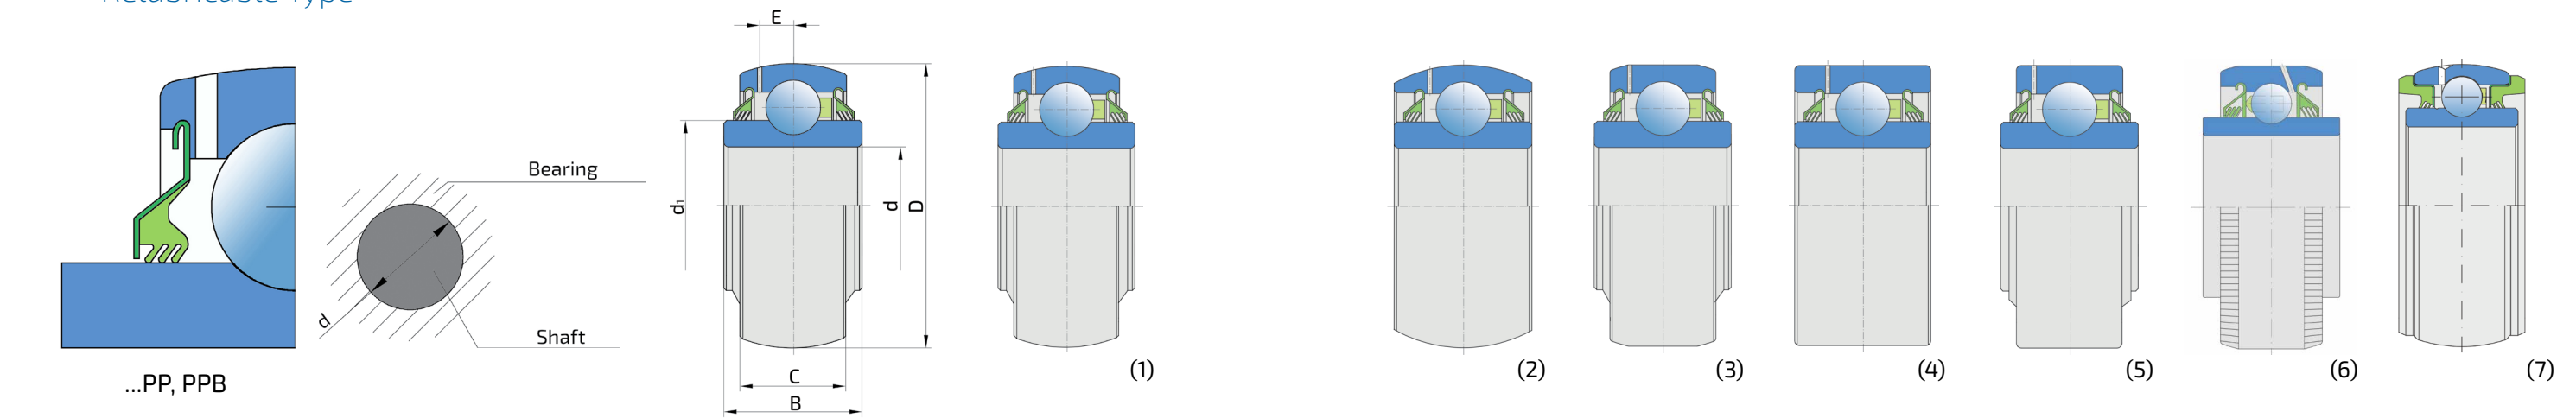


Dimensions (mm)											
Bore d		D		B		C		d1		E	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1.7717	45	3.3465	85	1.189	30.2	1.189	30.2	2.228	56.6	0.256	6.5
1.5350	39			1.188	30.18	1.188	30.18				
1.7811	45.24			1.437	36.5	0.866	22				
1.765	44.831			1.687	42.85	0.866	22				
1.7811	45.24	3.3465	85	1.438	36.53	1.185	30.1				
1.77	44.958	3.4921	88.7	1.687	42.86	1.25	31.75				
1.5748	40	3.3465	85	1.687	42.85	0.866	22				
1.9382	49.23	3.5433	90	1.188	30.18	1.188	30.18	2.461	62.5	0.260	6.6
1.4067	35.73			1.188	30.18	1.188	30.18				
1.7850	45.34			1.188	30.18	1.188	30.18				
1.9449	49.40			1.438	36.53	0.906	23				
2.1882	55.58	3.9370	100	1.313	33.34	1.313	33.34	2.720	69.1	0.280	7.1
2.1882	55.58			1.313	33.34	1.313	33.34				
1.6598	42.16			1.313	33.34	1.313	33.34				
2.1882	55.58			1.313	33.34	0.984	25				
2.1949	55.75			1.563	39.69	0.984	25				
2.1949	55.75			1.563	39.69	0.984	25				
1.9382	49.23			1.313	33.34	1.313	33.34				
1.7850	45.34			1.313	33.34	0.984	25				
1.7850	45.34			1.313	33.34	0.984	25				
2.0201	51.31			2.374	60.3	1.313	33.34				
1.7799	45.21			1.752	44.5	1.313	33.34				
2.0150	51.18			1.313	33.34	0.984	25				
2.1882	55.58			2.187	55.55	0.984	25				
2.1882	55.58			2.187	55.55	0.984	25				
2.1882	55.58			1.575	40	0.984	25				
2.1878	55.7			1.563	39.7	1.323	33.6				
1.78	45.212	3.9790	101.067	2.125	53.975	1.438	36.525	2.720	69.1	0.614	15.6

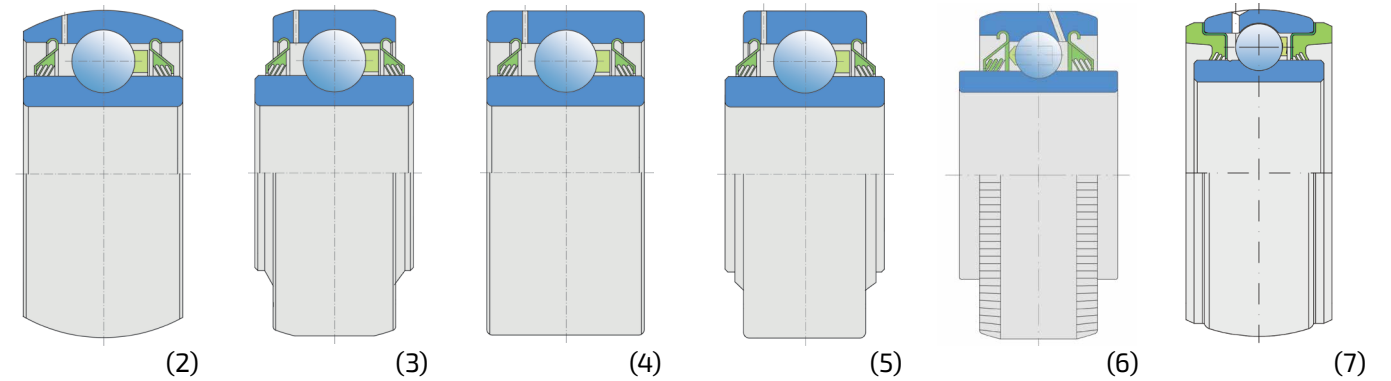


Load ratings (kN)							
C _{dyn}		C ₀		Mass		Designation	Type
lbs.	kN	lbs.	kN	lbs.	kg		
7300	32.5	4600	20.4	1.44	0.65	GW 209PPB2	2
				1.65	0.75	GW 209PPB4	2
				1.37	0.62	GW 209PPB11	1
				1.50	0.68	GW 209PPB12	1
				1.41	0.65	GW 209PPB13	1
				2.03	0.92	GW 209PPB30	3
				1.72	0.78	GW 209PPB40	1
7800	35.0	5200	23.2	1.50	0.68	GW 210PPB2	2
				2.25	1.02	GW 210PP3	4
				1.75	0.79	GW 210PPB5	2
				1.75	0.79	GW 210PP9	5
9700	43.5	6500	29.0	3.00	1.36	GW 211PP2	4
				2.62	1.19	GW 211PPB2	2
				3.00	1.36	GW 211PP4	4
				1.85	0.84	GW 211PPB8	1
				2.02	0.92	GW 211PPB9	1
				2.02	0.92	GW 211PP9	5
				2.26	1.03	GW 211PPB10	2
				2.02	0.92	GW 211PPB13	1
				2.02	0.92	GW 211PP13	5
				2.45	1.11	GW 211PP202	5
				2.45	1.11	GW 211PP25	5
				2.00	0.91	GW 211PPB14	1
				2.18	0.99	GW 211PPB15	1
				2.00	0.91	GW 211PPB15X1	1
				1.98	0.90	GW 211PPB16	1
9500	42.5	6500	29.0	2.21	1.03	GW 211PPB20	7
9700	43.5	6500	29.0	3.29	1.49	GW 211PPB21	6

8.1.4. Square Bore Series with Spherical and Cylindrical Outer Ring
– Relubricable Type

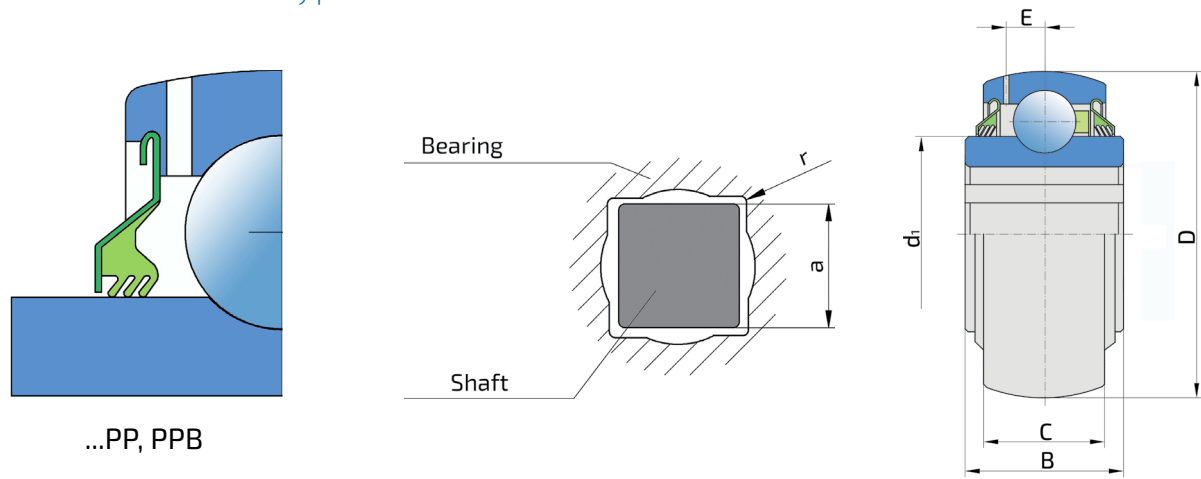

...PP, PPB

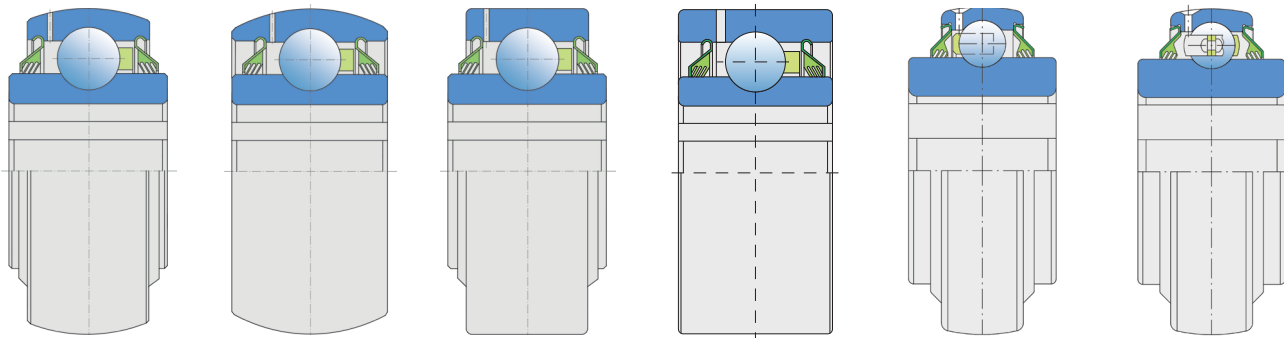


(1) (2) (3) (4) (5) (6)


Dimensions (mm)											
Schaft size a		D		B		C		d ₁		E	
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1 1/8	28.6	3.3756	85.74	1.437	36.5	1.185	30.1	2.05	52	0.256	6.5
1.18	30	3.5433	90	1.188	30.18	1.188	30.18	2.461	62.5	0.260	6.6
1.53	38.9	3.9370	100	1.313	33.34	1.313	33.34	2.72	69.1	0.279	7.1
1.53	38.9	3.9370	100	1.75	44.5	1.313	33.34	2.72	69.1	0.279	7.1
1.18	30	3.1496	80	1.437	36.5	0.827	21	2.05	52	0.256	6.5
1	25.4	3.1496	80			0.827	21			0.256	6.5
1.18	30	3.1496	80			1.185	30.1			0.260	6.6
1 1/8	28.6	3.3578	85.74			1.188	30.18			0.26	6.6
1.18	30	3.3465	85	1.772	45	1.189	30.2	2.228	56.6	0.260	6.6
0.98	25			1.772	45	1.188	30.18			0.260	6.6
1.29	32.8			1.437	36.5	1.189	30.2			0.260	6.6
1.29	32.8			1.437	36.5	0.866	22			0.256	6.5
0.98	25			1.687	42.85	0.866	22			0.256	6.5
1.18	30			1.687	42.85	0.866	22			0.256	6.5
1.18	30			1.772	45	0.866	22			0.256	6.5
1.18	30	3.5433	90	1.188	30.18	1.188	30.18	2.461	62.5	0.260	6.6
1.53	38.9	3.9370	100	1.313	33.34	1.313	33.34	2.72	69.1	0.279	7.1
1.53	38.9			1.752	44.5	1.313	33.34				
1.59	40.5			1.771	45	0.984	25				
1.54	39.25			2.187	55.55	0.984	25				
1.38	35			2.187	55.55	0.984	25				
1.59	40.5			1.772	45	0.984	25				

Load ratings (kN)							
C		C ₀		Mass		Designation	Type
lbs.	kN	lbs.	kN	lbs.	kg		
7300	32.5	4400	19.8	2.04	0.925	GW 208PP17	3
7800	35.0	5200	23.2	2.31	1.048	GW 210PP4	4
9700	43.5	6500	29.0	2.79	1.266	GW 211PP3	4
9700	43.5	6500	29.0	2.62	1.188	GW 211PP17	3
7300	32.5	4400	19.8	1.48	0.670	GW 208PPB5	1
				1.48	0.670	GW 208PPB6	1
				1.75	0.790	GW 208PPB8	1
				2.01	0.912	GW 208PPB17	1
7300	32.5	4600	20.4	1.87	0.850	GW 209PPB3	1
				2.16	0.980	GW 209PPB3.X2	1
				1.75	0.794	GW 209PPB5	1
				1.65	0.748	GW 209PPB8	1
				2.09	0.950	GW 209PPB26	1
7900	35.5	4600	20.4	1.37	0.62	GW 209PPB31	1
7300	32.5			2.02	0.920	GW 209PPB32	1
7800	35	5200	23.2	1.75	0.794	GW 210PPB4	2
9700	43.5	6500	29	2.66	1.207	GW 211PPB3	2
				2.54	1.150	GW 211PPB17	1
				2.18	0.990	GW 211PPB40	5
				2.73	1.240	GW 211PPB40.X1	1
				2.87	1.300	GW 211PPB40.X2	1
				2.18	0.990	GW 211PPBJ40	6

8.1.5. Hexagonal Bore Series with Spherical and Cylindrical Outer Ring

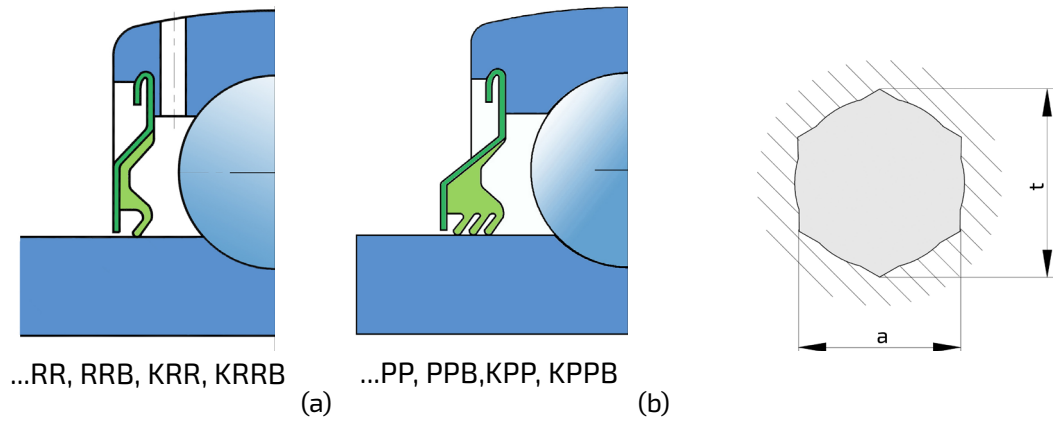

Shaft	Dimesions (mm)												
	a		t _{min.}		D		B		C		d ₁		
	inch	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
11/16	0.6949	17.65	0.797	20.24	1.85	47	0.825	20.96	0.551	14	1.110	28.2	
11/16	0.6949	17.65	0.797	20.24	1.85	47	0.825	20.96	0.551	14	1.110	28.2	
7/8	0.875	22.25	1.010	25.65	2.0472	52	1	25.4	0.591	15	1.323	33.6	
1	1.001	25.43	1.152	29.26	2.4409	62	0.945	24	0.630	16	1.563	39.7	
1 1/4	1.251	31.78	1.433	36.40	2.8346	72	1.484	37.7	0.669	17	1.815	46.1	
1 1/4	1.251	31.78	1.435	36.46	3.1496	80	1.437	36.5	0.709	18	2.047	52	
1 1/8	1.126	28.6	1.297	32.95			1.484	37.7					
1 1/8	1.126	28.6	1.297	32.95			1.484	37.7					
1 1/8	1.126	28.6	1.301	33.05			0.984	25					
1 1/8	1.126	28.6	1.298	32.97			0.984	25					
1 1/4	1.251	31.78	1.435	36.46			0.984	25					
1 1/4	1.251	31.78	1.435	36.46			0.984	25					
1 1/4	1.251	31.78	1.435	36.46			1.496	38	0.748	19			
1 1/4	1.251	31.78	1.433	36.40	3.1496	80	1.437	36.5	0.709	18	2.047	52	
1 1/2	1.501	38.12	1.730	43.94	3.3465	85	1.181	30	0.748	19	2.236	56.8	
					3.5433	90			0.866	22	2.461	62.5	
1 1/4	1.251	31.78	1.435	36.46	2.8346	72	1.496	38	0.748	19	1.815	46.1	

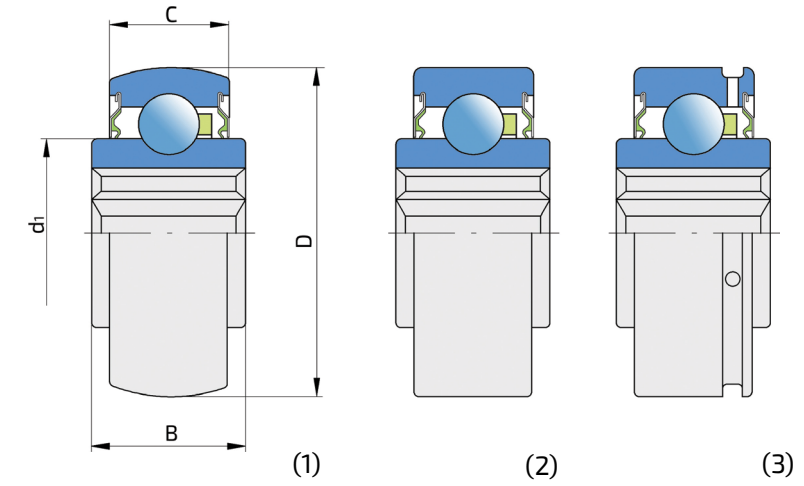


Load ratings						NON-RELUBRICABLE TYPE			
C _{dyn}		C _o		Mass		Designation			
lbs	kN	lbs	kN	lbs.	kg	Seal Fig. a	Type	Seal Fig. b	Type
2203	9.8	1472	6.55	0.33	0.15	204KRR2	2		
2203	9.8	1472	6.55	0.44	0.20	204KRRB2	1		
3100	14.0	1700	7.8	0.44	0.20			205KPPB2	1
						205KRR2	2		
						205KRRB2	1		
								205PP13	2
								205PPB13	1
4400	19.5	2500	11.3	0.87	0.40			206KPP3	2
				0.87	0.40			206KPPB3	1
				0.75	0.34	206KRR6	2		1
				0.75	0.34	206KRRB6	1		
5700	25.5	3400	15.3	1.00	0.45			207KPP3	2
				0.87	0.40			207KPPB3	1
				1.00	0.45			207KPPB9	1
				1.00	0.45	207KRRB9	1		
				0.87	0.40	207KRRB12	1		
				0.94	0.42	207KRRB12C19	1		
				0.87	0.40	207KRR17	2		
				0.87	0.40	207KRRB17	1		1
				1.44	0.65			207KPPB31	
7300	32.5	4400	19.8	1.48	0.67			W 208PPB16	1
				1.48	0.67			W 208KPP8	2
				1.499	0.68			W 208PP16	2
7300	32.5	4600	20.4	1.27	0.58	209KRRB2	1		
								209KPPB2	1
7870	35	5213	23.2	1.76	0.80	210RRB6	1		
RELUBRICABLE TYPE									
5700	25.5	3400	15.3	1.433	0.65			G207 KPP3 AH16	3

8.2. Agricultural Bearing Units


8.2.1. Square Series

Type 1.

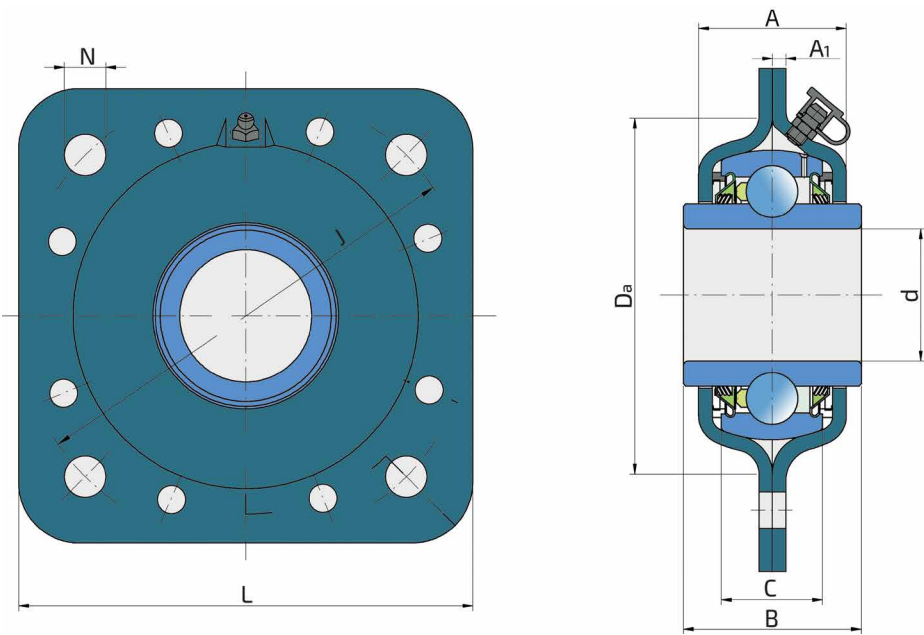


a-square bore mm	Shaft size		Dimensions (mm)							
	inch	d-cylindrical bore mm	B	A	A ₁	C	D _a	L	J	N
-	1.765	44.831	42.85	39	3.5	22	97	127	127	13.5
25	-	-	42.85							
30	-	-	42.85							
32.8	-	-	42.85							
30	-	-	42.85							
30	-	-	45							
-	1.5004	38.11	42.85							
-	1.5236	38.7	42.85							
-	1.5748	40	42.85							
-	2.1882	55.58	55.55	44.7	4	25	113	140	140	13.5
-	2.1882	55.58	55.55							
40.5	-	-	45							
39.25	-	-	55.55							
35	-	-	55.55							
40.5	-	-	55.55							
40.5	-	-	45							
40.5	-	-	45							
-	2.1654	55	55							

Type 2.

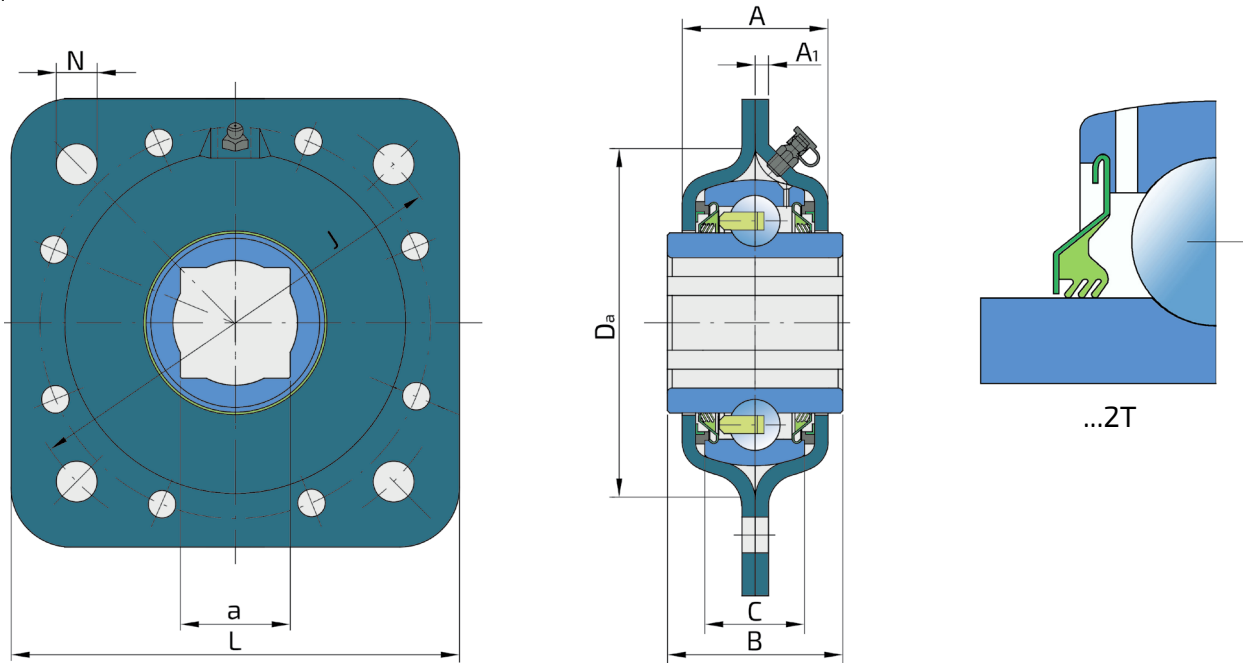

Recommendations for max. load				Mass		Type	Designation
radial lbs	kN	axial lbs	kN	lbs	kg		
1750	7.7	860	3.8	3.32	1.51	1	GWST 209PPB12
				3.92	1.78	2	GWST 209PPB26
				3.72	1.69	2	GWST 209PPB28
				3.56	1.63	2	GWST 209PPB29
				3.72	1.69	2	GWST 209PPB31
				3.90	1.77	2	GWST 209PPB32
				3.56	1.63	1	GWST 209PPB38
				3.56	1.63	1	GWST 209PPB39
				3.56	1.62	1	GWST 209PPB40
2200	9.8	1150	5.1	4.51	2.05	1	GWST 211PPB15
				4.51	2.05	1	GWST 211PPB15.H
				4.95	2.25	2	GWST 211PPB40
				5.39	2.45	2	GWST 211PPB40.X1
				5.83	2.65	2	GWST 211PPB40.X2
				5.39	2.45	2	GWST 211PPB43
				4.98	2.26	2	GWST 211PPBP40
				4.98	2.26	2	GWST 211PPBJ40
				4.98	2.26	1	LSST 211 X3-3




8.2.2. Round Series
Type 1.

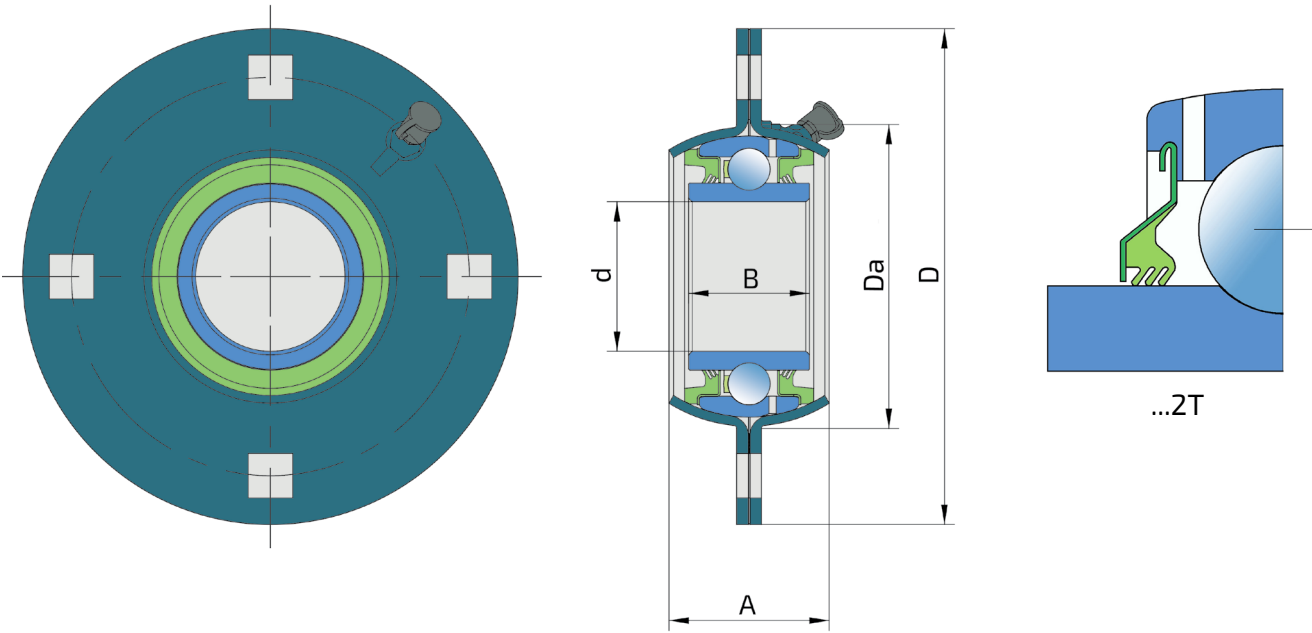

d cylindrical bore		Dimensions (mm)								Recommendations for max. load				Mass		Designation
inch	mm	B	A	A ₁	C	D _a	D	J	N	lbs	kN	lbs	kN	lbs	kg	
1.781	45.24	36.53	48.5	3.5	30.1	93	150	120.5	13.5	1750	9.8	860	3.8	4.048	1.836	GWST 209PPB13
2.193	55.7	39.7	56.4	3.5	33.4	111	167	138	13.5	2200	9.8	1150	5.1	5.478	2.485	GWST 211PPB20

* Maintenance free option is also available

8.3. Agricultural Bearings and Bearing Units Overview

BALL BEARINGS FOR AGRICULTURAL MACHINERY										BEARING UNITS															
Inner Ring	Permanently Lubricated					With Lubrication Groove					Bearing Units														
	Cylindrical Outer Ring					Spherical Outer Ring					Cylindrical Outer Ring					Spherical Outer Ring									
 ROUND BORE	203KRR-AH02	16.26	40	18.29	12	W 208PPB2	338.11	80	42.96	18	GW 210PP3	35.73	90	30.18	30.18	GW 209PPB2	45	85	30.2	30.2	GW5T 209PPB13	45.24	150	38.53	48.5
	203KRR-AH05	13	40	18.29	12	W 208PPB4	30.17	80	30.18	30.18	GW 210PP9	49.40	90	36.53	23	GW 209PPB4	39	85	30.18	30.18	GW5T 209PPB38	38.11	127	42.85	39
	203KRR3	15.95	50.8	15	15	W 208PPB7	30.17	80	30.18	18	GW 211PP2	55.58	100	33.34	33.34	GW 209PPB11	45.24	85	36.5	22	GW5T 209PPB39	38.7	127	42.85	39
	204KRR	20	47	17.7	14	W 208PPB23	38.11	80	42.96	30.18	GW 211PP4	42.16	100	33.34	33.34	GW 209PPB12	44.83	85	42.85	22	GW5T 209PPB40	40	127	42.85	40
	205KRP2	19.202	52	21.1	15	W 209PPB2	45	85	30.18	30.18	GW 211PP9	55.75	100	39.69	25	GW 209PPB13	45.24	85	36.53	30.1	GW5T 211PPB15	55.58	140	55.55	44.7
	207KRR	35	72	25	17	W 209PPB4	39	85	30.18	30.18	GW 211PP13	45.34	100	33.34	25	GW 209PPB40	40	85	42.85	22	GW5T 211PPB15H	55.58	140	55.55	44.7
	208KRR4	38.89	80	27.5	21	W 209PPB11	45.24	85	36.53	22	GW 211PP20	51.31	100	60.3	33.34	GW 210PPB2	49.23	90	30.18	30.18	LS5T 211X3-3	55	140	55	44.7
	W 208PP4	30.17	80	30.18	30.18	W 210PPB2	49.23	90	30.18	30.18	GW 211PP25	45.21	100	44.5	33.34	GW 210PPB5	45.34	90	30.18	30.18					
	W 210PP2	49.23	90	30.18	30.18	W 210PPB5	45.34	90	30.18	30.18	GW 209PPB30	44.958	88.7	42.86	31.75	GW 211PPB2	55.58	100	33.34	33.34					
	W 211PP2	55.58	100	33.34	33.34	W 211PPB2	55.58	100	33.34	25	GW 211PPB8	55.58	100	33.34	25	GW 211PPB8	55.58	100	33.34	25					
 SQUARE BORE	W 210PP3	25.4	72	45	24	W 208PPB5	28.6	80	36.53	18	GW 208PP17	28.6	85.74	36.5	30.18	GW 208PPB5	30	80	36.5	21	GW5T 209PPB26	25	127	42.85	40
	W 208PP5	30	80	36.5	18	W 208PPB6	25.4	80	36.53	18	GW 210PP4	28.6	90	30.18	30.18	GW 208PPB6	25.4	80	36.5	21	GW5T 209PPB31	30	127	42.85	40
	W 208PP6	25.4	80	36.5	18	W 208PPB8	28.6	80	36.53	30.18	GW 211PP3	38.1	100	33.34	33.34	GW 208PPB8	30	80	36.5	30.18	GW5T 209PPB28	30	127	42.85	39
	W 208PP8	30	80	36.5	30.1	W 208PPB9	25.4	80	36.53	30.18	GW 211PP7	38.1	100	44.5	33.34	GW 208PPB7	28.6	85.74	36.5	30.18	GW5T 209PPB29	32.8	127	42.85	39
	W 208PP20	30	80	36.5	18	W 208PPB11	22.2	85.74	36.53	30.18	GW 208PPB3	30	85	45	30.18	GW 209PPB3	30	85	45	30.18	GW5T 209PPB32	30	127	45	39
	W 209PP3	30	85	45	30.18	W 208PPB12	28.6	80	36.53	30.18	GW 209PPB3X2	25.4	85	45	30.18	GW 209PPB3X2	25.4	85	45	30.18	GW5T 211PPB40	40.5	140	45	44.7
	W 210PP4	28.6	90	30.18	30.18	W 208PPB13	22.2	80	36.53	18	GW 209PPB5	32.8	85	36.5	30.2	GW 209PPB5	32.8	85	36.5	30.2	GW5T 211PPB40X1	38.25	140	55.55	44.7
	W 211PP3	38.9	100	33.34	33.34	W 208PPB18	22.2	87.34	36.53	30.18	GW 208PPB8	32.8	85	36.5	22	GW 209PPB8	32.8	85	36.5	22	GW5T 211PPB40X2	35	140	55.55	44.7
	W 211PP5	38.9	101.6	44.5	36.5	W 208PPB19	28.6	87.34	36.53	30.18	GW 208PPB26	25.4	85	42.85	22	GW 209PPB26	25.4	85	42.85	22	GW5T 211PPB43	40.5	140	55.55	44.7
						W 209PPB5	32.8	85	36.5	30.2	GW 209PPB5	32.8	85	36.5	30.2	GW 209PPB31	30	85	42.85	22	GW5T 211PPB40	40.5	140	45	44.7
 HEXAGONAL BORE	204KRR2	17.65	47	20.96	14	204KRRB2	17.65	47	20.96	14	204KRRP17	28.6	85.74	36.5	30.18	GW 209PPB32	30	85	45	22	GW5T 211PPB40X1	39.25	100	55.55	25
	205PP13	22.25	52	25.4	15	205KRPB2	22.25	52	25.4	15	205KRP4	28.6	90	30.18	30.18	GW 209PPB32	30	85	45	22	GW 211PPB40X2	35	100	55.55	25
	205KRR2	22.25	52	25.4	15	205KRRB2	22.25	52	25.4	15	205KRRP3	38.1	100	33.34	33.34	GW 210PPB4	30	90	30.18	30.18	GW 211PPB40X2	35	100	55.55	25
	206KPP3	25.43	62	24	16	205PPB13	22.25	52	25.4	15	206KRPB3	25.43	62	24	16	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB40X2	35	100	55.55	25
	206KRR6	25.43	62	24	16	206KRPB3	25.43	62	24	16	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB40X2	35	100	55.55	25
	207KPP3	31.78	72	37.7	17	206KRRB6	25.43	62	24	16	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB40X2	35	100	55.55	25
	207KRR17	31.78	72	37.7	17	207KRPB3	31.78	72	37.7	17	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB40X2	35	100	55.55	25
	G207 KPP3 AH16	31.78	72	38	19	207KRPB9	28.6	72	37.7	17	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB40X2	35	100	55.55	25
	W 208KPP8	31.78	80	36.5	18	W 207KRPB31	31.78	80	36.5	18	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB40X2	35	100	55.55	25
	W 208PP16	31.78	80	36.5	18	W 207KRRB9	28.6	72	37.7	17	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB40X2	35	100	55.55	25
					W 207KRRB12	28.6	72	25	17	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB3	38.9	100	33.34	33.34	GW 211PPB40X2	35	100	55.55	25	

Disc Harrow Bearings, Bearing Units and Hubs

9.1. Disc Harrow Bearings and Bearing Units

- Independent Discs..... 92

9.2. Integrated Hubs..... 93



9.1. Disc Harrow Bearings and Bearing Units – Independent Discs

Development of modern agricultural machinery has increased the demand of bearings for soil preparation machinery. There is a requirement that each disc should have its own compact bearing, in order to reduce the costs of dismounting and mounting during maintenance, as well as request for better sealing and permanent lubrication of bearings.

Design

Design of double row angular contact ball bearings for agricultural application has derived from the design of the wheel bearings. Rigid bearing arrangement needs reduced and constant axial clearance that does not depend on the skills of final user but is provided by design and bearing production technology. Rings and balls are made of special bearing steel. One bearing is mounted on a single plate.

Force

As opposite from classical disc harrow bearings, these bearings can support both axial force and torque.

Sealing and lubrication

Bearing are permanently lubricated with grease for agricultural machinery at a rate of 60-80% of the free volume. These bearings have rubber-metal seals. It is also necessary to add the final sealing.

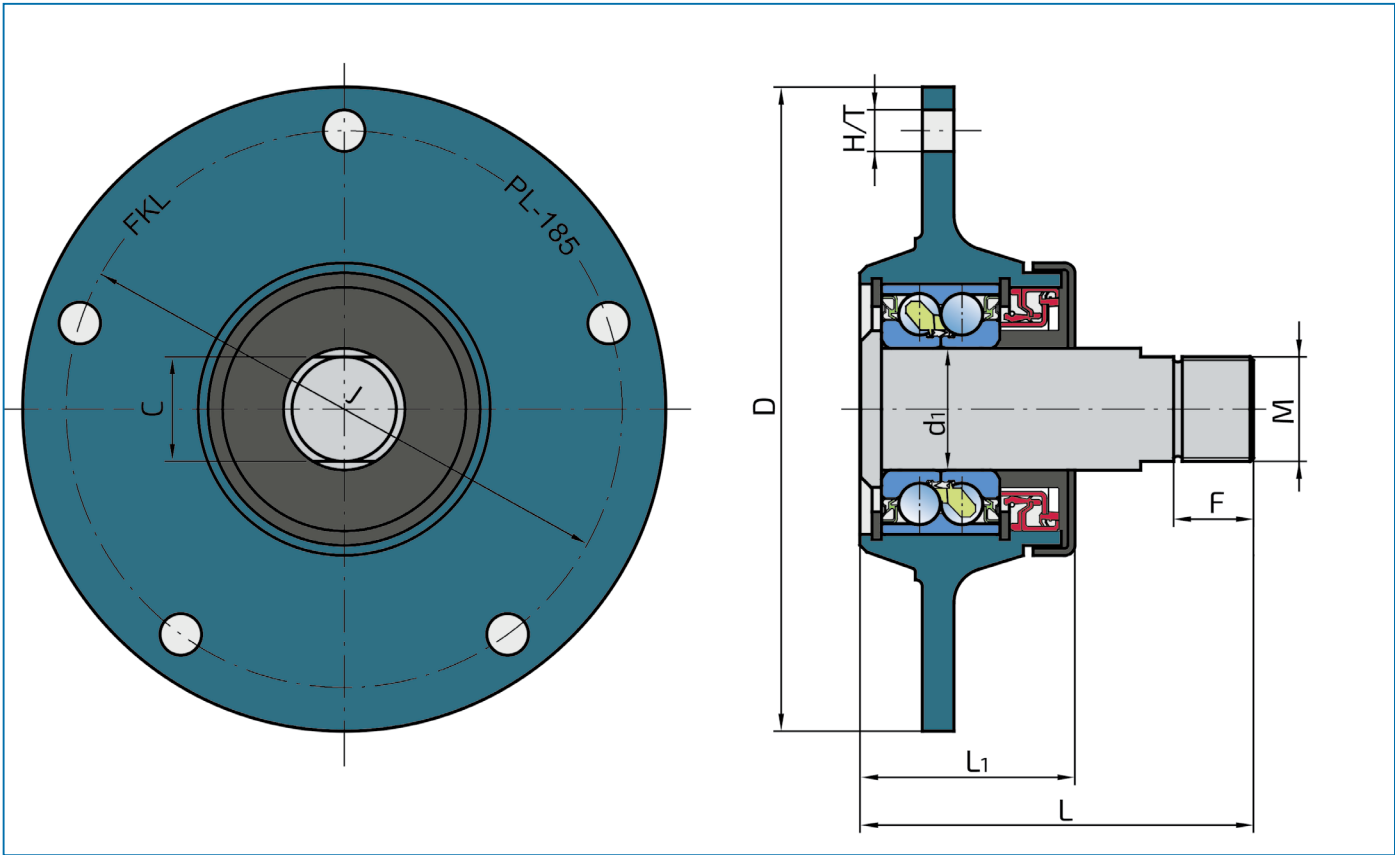


Fig.13. Disc harrow bearing

9.2. Integrated Hubs

In order to satisfy a modern tendency in agricultural equipment development, FKL has developed the Agro Point product line. Combined with disc this bearing hub is designed to work in various agricultural applications.

Design

Depending on the application place, optimized internal hub design with integrated zinc coated flange provides a multiple service life of this type of product and good anticorrosion protection.

Sealing and lubrication

Hubs are permanently lubricated with high quality grease for agricultural machinery at the rate of 60-80% of free volume which reduce the lubricant consumption and with its unique sealing solution reduces possible soil contamination.

Advantages

Integrated Hubs product line is made as a long-term integral solution which doesn't require maintenance or service and simply to be replaced after its lifetime. Each model of hub has a certain loading capacity and basic dimensions, but mounting dimensions could be customer tailored solutions.

Notice: More about types, modalities and sizes of integrated hubs you can find in our leaflet AGRO POINT HUBS.



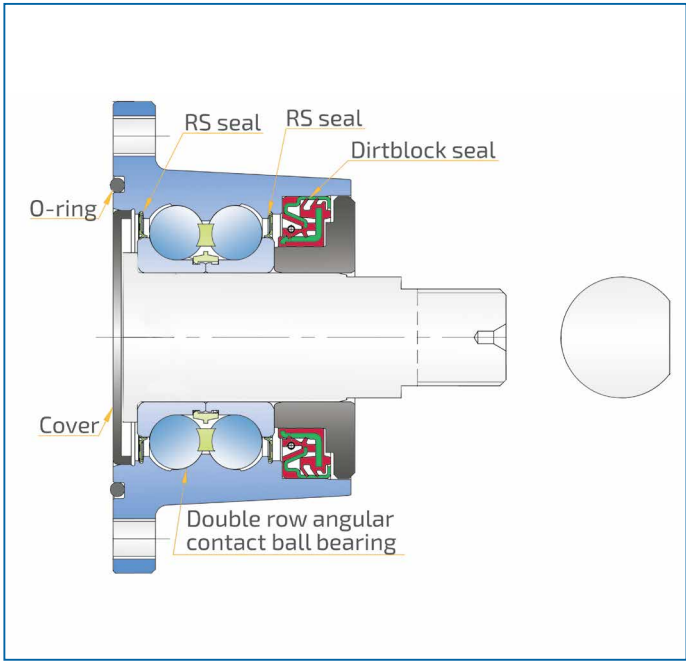


Fig.14. Technical drawing of Agro Point Hub IL50


Seeding

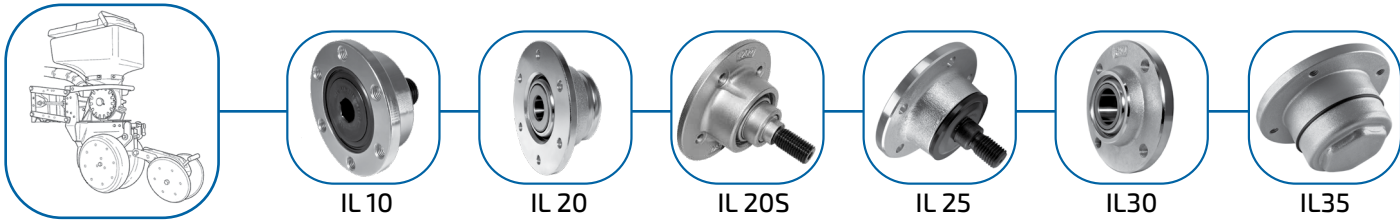

Tillage

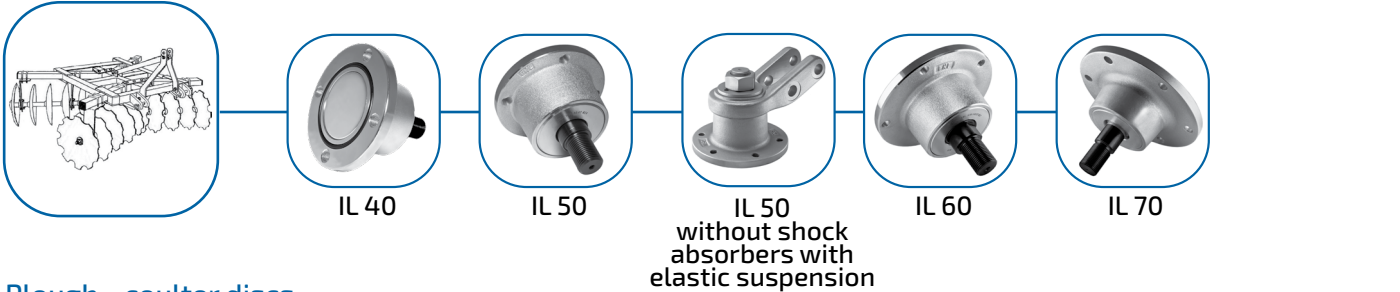

Plough - coulter discs

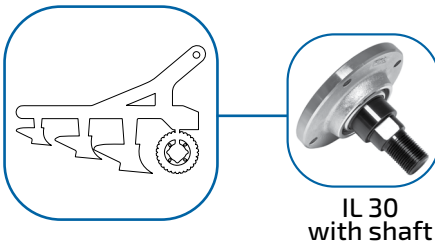

Index Label


10.1. Index Label

Suffixes	
Sealing Types	
ZZ	Metal shield (non contact sealing) on both sides
2RS	One lip rubber metal seal on both sides
2RS1	One lip rubber metal seal on both sides
2S	One lip rubber metal seal (on both sides)
2F	One lip rubber metal seal + flinger, on both sides
2T	Three lip seal on both sides
T	Outer ring with stopping pin
2TC	Three lip seal on both sides+ metal cover
2TB	Three lip seal + metal shield, on both sides
TDT	Three lip seal at one side, double three lip seal on other side
FS	Sealing with one lip seal and a protective metal ring at one side and one lip seal on the another side
TBS	Sealing with three lip seal and a protective metal ring at one side and one lip seal on the another side
TBT	Sealing with three lip seal and a protective metal ring at one side and three lip seal on the another side
2P	Five lip seal on both sides
2PB	Five lip seal and metal shield, on both sides
2PC	Five lip seal on both sides + metal cover
P	Triple lip seal on one side, cylindrical surface of outer ring
PP	Triple lip seal, cylindrical surface of outer ring
PB	Triple lip seal on one side, spherical surface of outer ring
PPB	Triple lip seal, spherical surface of outer ring
RR	One lip seal cylindrical surface of outer ring
RRB	One lip seal spherical surface of outer ring
KPP	Triple lip seal cylindrical surface of outer ring
KPPB	Triple lip seal spherical surface of outer ring
KR	One lip seal on one side, cylindrical surface of outer ring
KRR	One lip seal, cylindrical surface of outer ring
KRB	One lip seal on one side, spherical surface
KRRB	One lip seal, spherical surface
KRP	One lip seal on one side and on the other side is triple lip seal
Special Surface Protection	
Zn	Galvanized: Zn1, Zn2, Zn6, Zn8, Zn9, Zn28,...
Br	Blackened: Br1, Br2, Br6, Br8, Br9, Br28,... 1-... outer ring 2-... inner ring 6-... flinger 8-... locking collar 9-... all outside surfaces 28-... inner ring + locking collar
Y Program - Special Design	
S0	For temperatures above normal (150°C)

Suffixes	
Geometry and Internal Design	
N	Snap ring groove in outer ring
NR	Snap ring groove in outer ring with snap ring
SH	Cylindrical outer ring without lubrication holes
L	Left hand thread
R	Right hand thread
C2	Radial internal clearance less than Normal
C3	Radial internal clearance greater than Normal
Q	Optimized contact geometry and surface finish
B	Contact angle 25°±5°
A	Hole for lubrication opposite of tightening
H	No lubrication hole
S	Cylindrical outer ring
SN	Groove for circlip
SNR	Groove with a circlip

Prefixes	
U	Version without eccentric collar
E	Tightening with locking screws
Y	Tightening with excenter rings
S	Compact fit tightening
K	Conrad, non filling slot type
FN	F Housing from Ductile Cast Iron
NN	N Housing from Ductile Cast Iron
SN	S Housing from Ductile Cast Iron
GR	Special round housing from Ductile Cast Iron
NR	Special oval housing from Ductile Cast Iron
HG	Special round housing from Ductile Cast Iron
HGR	Special round housing from Ductile Cast Iron
GW	With lubrication hole, wide ring single row
W	Permanently lubricated, wide ring single row
VP	Bearing with shaft
IL10-60	Agro Point Hub
PL	Hub with impressed bearing
LR	Track roller
SL	Special Ball Bearing
SLE	Special Ball Bearing
SLU	Special Ball Bearing
D	Special Ball Bearing
SLO	Special Ball Bearing
SLK	Special Ball Bearing
SP	Special Ball Bearing
SPR	Special Ball Bearing
TRB	Special Cylindrical Bearing

11. Production Program

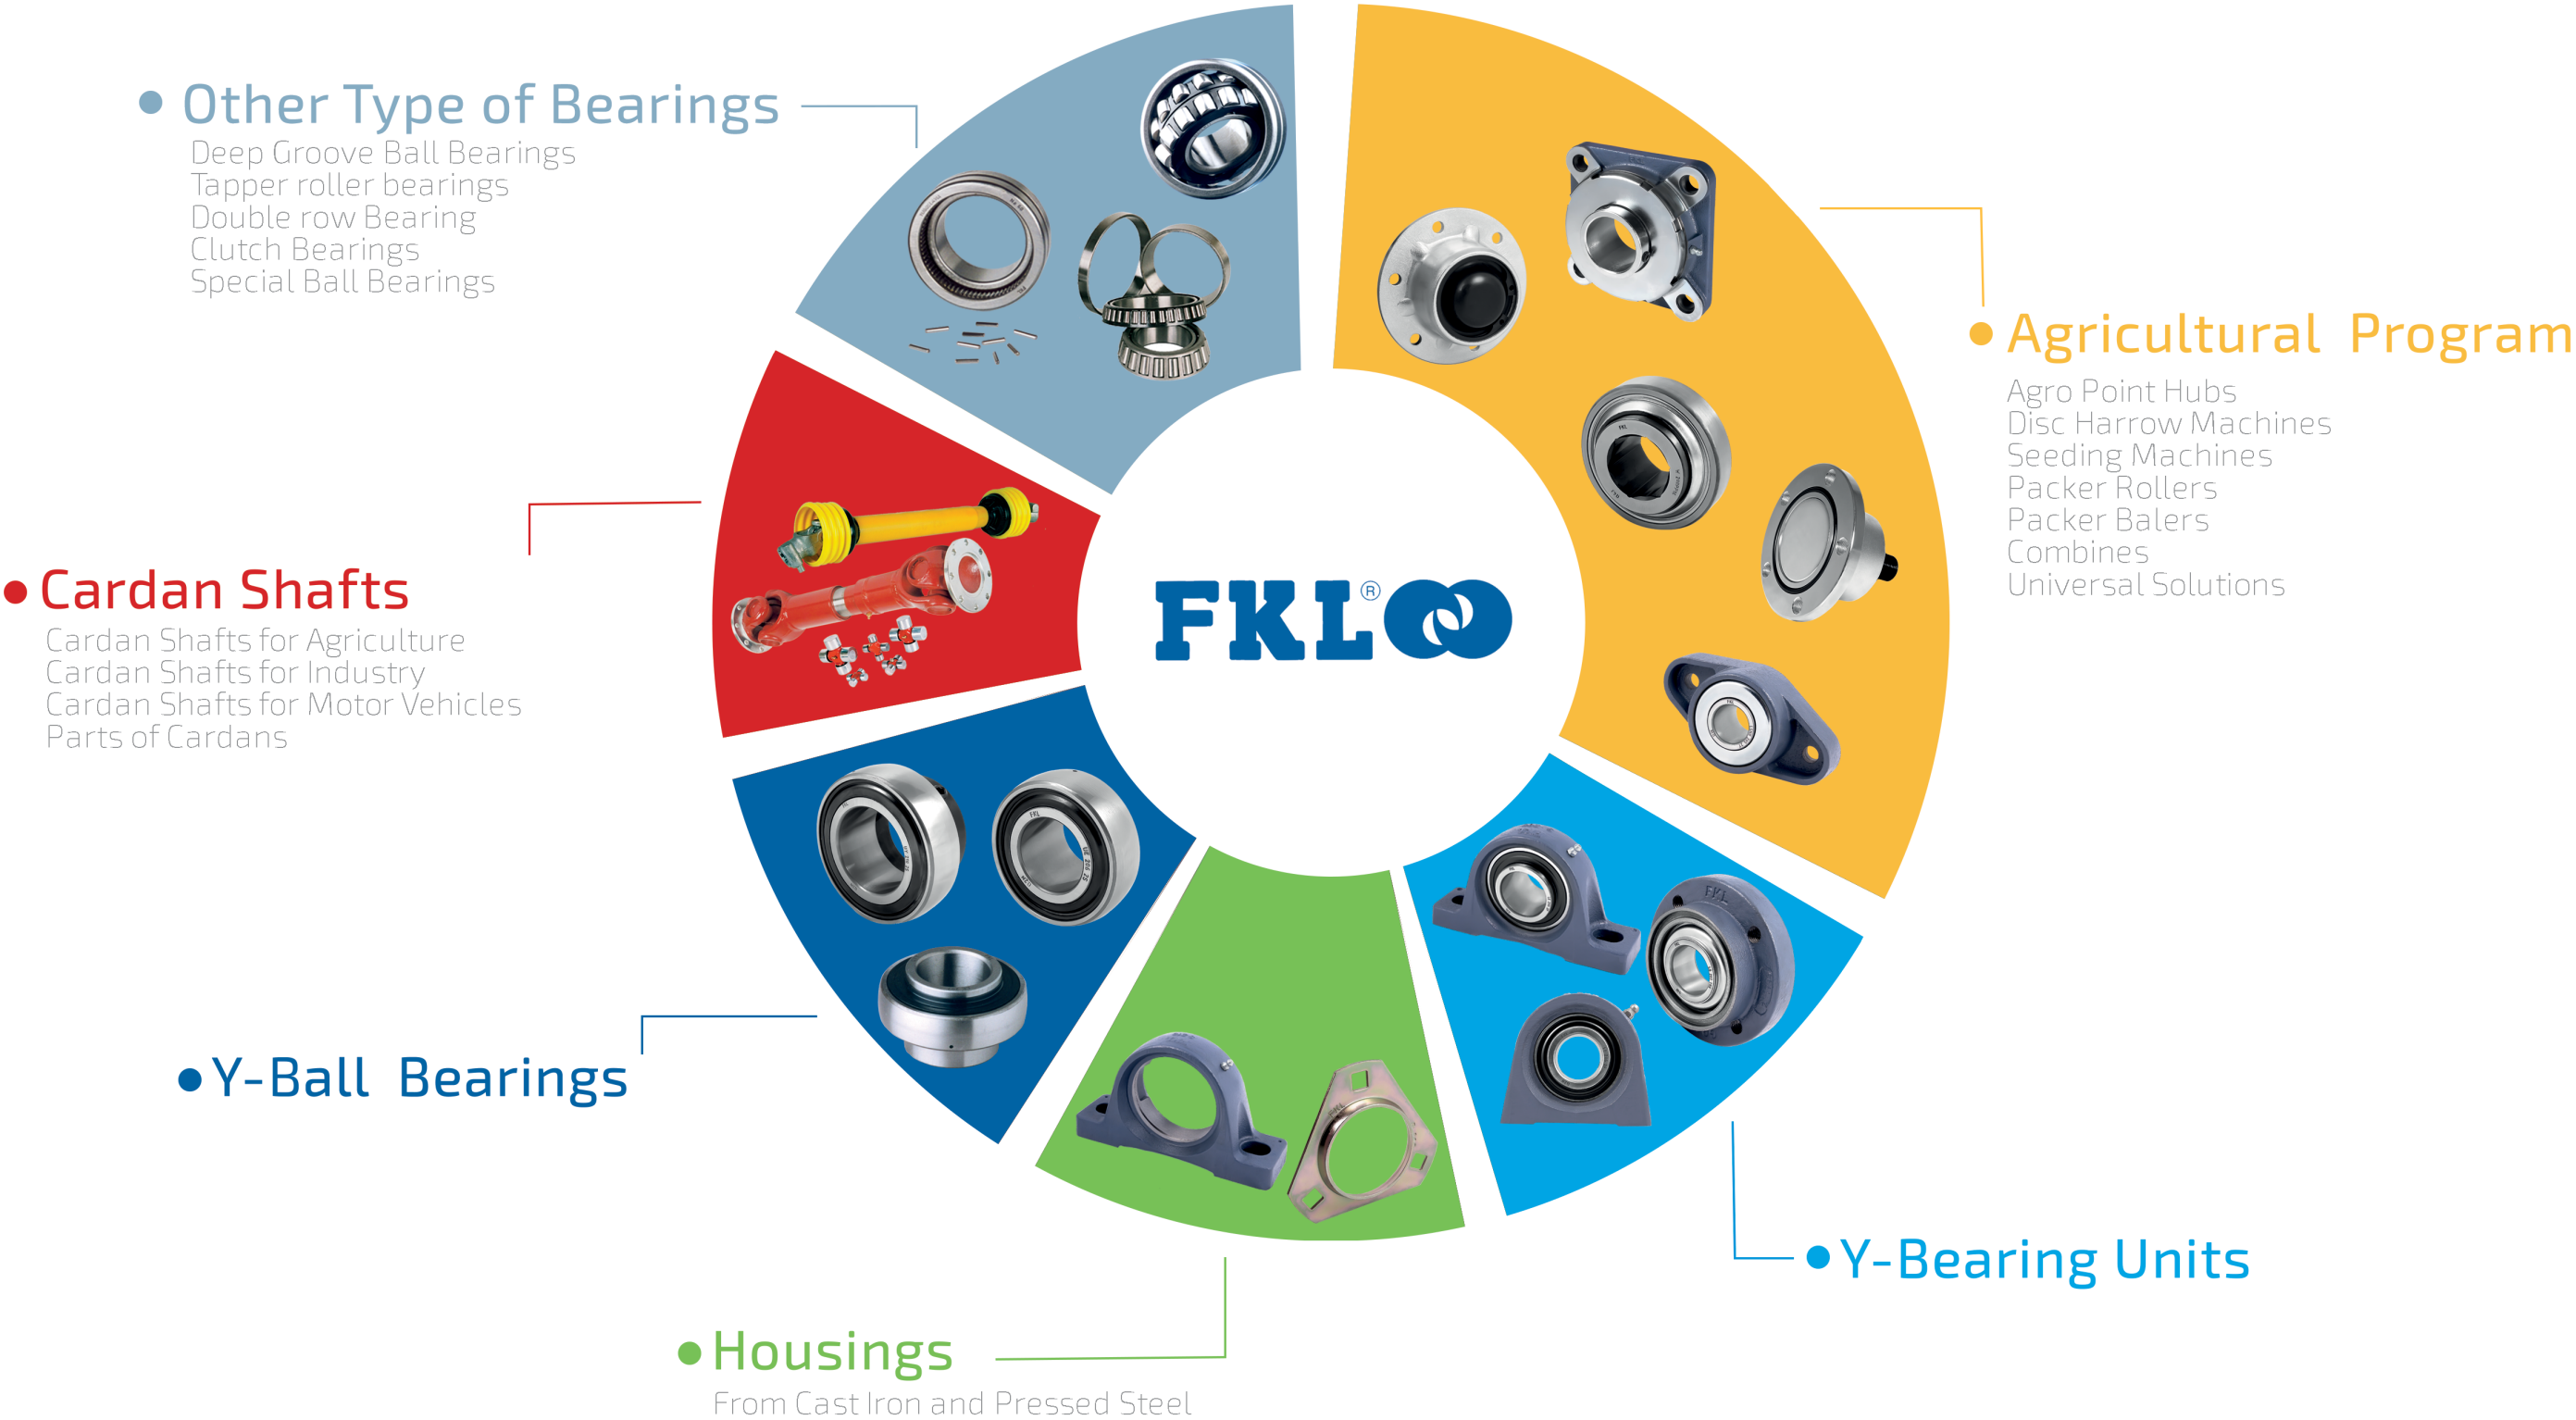

12. FKL Distributors Worldwide

Foreign Markets

LLC FKL
Russia, Voronezh
Tel: +7 473 211 05 50
www.rusfkl.ru

FKL BY
Belarus, Minsk
Tel: +375 17 212 18 39
www.fkl.by

FKL CZECH S.R.O.
Czech Republic/Slovakia, Kroměříž
Tel: +420 573 33 68 60
www.fkl-czech.cz

FKL DEUTSCHLAND GMBH
Germany, Heckelberg-Brunow
Tel: +49 33451 55 57 99
www.fkl-deutschland.de

FKL HUNGARY KFT
Hungary, Debrecen
Tel: +36 70 365 8187
www.fklhungary.hu

FKL IBERICA Bearings S.L.
Spain/Portugal, Lugo
Tel: +34 982 20 90 33
www.fkl-iberica.com

FKL PARS
Iran, Tehran
Tel: +98 21 77 50 64 61
fkl.pars@gmail.com

FKL POLSKA SP.Z.O.O.SP.K.
Poland/Baltic States, Kuślin
Tel: + 48 605 48 68 78
www.fkl-polska.pl

FKL ROMANIA SRL
Romania/Moldova, Bragadiru
Tel: +40 374 64 02 27
www.fklromania.ro

FKL UKRAINE LTD
Ukraine, Lutsk
Tel: +38 332 77 43 99
www.fkl.ua

AGRIPARTNER - GANAYE SARL
France, Beaumont
Tel: +33 05 49 85 50 22
www.agripartner.fr

APPLIED INDUSTRIAL TECHNOLOGIES PTY LTD
Australia, Oakleigh
Tel: +61 3 9567 8700
www.appliedau.com.au

AS MODUATOR
Estonia, Põltsamaa
Tel: + 372 776 86 53
www.moduator.ee

AUCKLAND BEARING DISTRIBUTORS LTD
New Zealand, Auckland
Tel: +64 9 444 65 66
www.aucklandbearings.co.nz

CELSAN EUROPA S.R.L.
Italy, Argelato
Tel: +39 51 66 30 741
www.celsan.com

EKOAL OOD
Bulgaria, Razgrad
Tel: +359 84 66 08 71
www.ekoalbg.com

HAGOP GIRAGOS
Syria, Lattakia
Tel: +963 41 43 31 08
giragos@scs-net.org

JOKILAAKERI OY
Finland, Pori
Tel: +358 2 631 95 00
www.nomogroup.fi

LAUDORTS SIA
Latvia, Riga
Tel: +371 20 52 15 59
www.laudorts.lv

NOVOTECHNO S.R.O.
Slovakia, Nové Zámky
Tel: +421 35 6424 520
www.novotechno.sk

PNS TECH
Canada, Saint-Agapit
Tel: +1 418 888 5200
www.pnstech.ca

PO BEARINGS S.R.O.
Slovakia, Prešov
Tel:+421 51 74 950 86
www.loziska-bearings.sk

ROLLER J KOUKORINIS J LIAKOPOULOS EE
Greece, Larissa
Tel: +30 2410 28 91 39
www.roller.com.gr

SE-KRA DOO
Croatia, Sesvetski Kraljevec
Tel: +385 01 204 80 23
www.se-kra.hr

SISA OTOMOTIV DIS TICARET LTD
Turkey/Iraq, Izmir
Tel: +90 232 375 22 81
sisadis.tic@superonline.com

SRL ROMANCIUC ROMA SI CO
Moldova, Singerei
Tel: +373 69 16 83 82
romanciuci@mail.ru

TEMKO DOO
North Macedonia, Skoplje
Tel: +389 2 3066 068
goran.temko@gmail.com

TIVI GROUP LTD
Bulgaria, Dimitrovgrad
Tel: +359 391 61 561
www.tivigroup.com

UAB IGNERA
Lithuania, Kaunas
Tel: +370 37 35 35 15
www.ignera.lt

VSC UNITECH SRL
Moldova, Chişinău
Tel: +373 69 10 16 79
www.vscunitech.md

VULIN DOO
Bosnia and Herzegovina, Bijeljina
Tel: +387 55 49 03 40
vulindoo@yahoo.com

WEARPARTS TILLAGE TOOLS LLC
USA, Gothenburg
Tel: +1 888 425 2337
www.wearpartsltc.com

Domestic Market

MIKRON DOO
Serbia, Sirig
Tel: +381 21 849 538
www.mikron-doo.rs

NEPTUN DOO
Serbia, Temerin
Tel: +381 21 84 62 55
www.neptundoo.rs

TENEJ DOO
Serbia, Beograd
Tel: +381 11 74 65 655
www.tenej.com

AGROMARKET DOO
Serbia, Veternik
Tel: +381 21 82 34 24
www.agromarket021.com

JUSEL DOO
Serbia, Šabac
Tel: +381 15 30 00 00
www.jusel.com

KUGLAGER DOO
Serbia, Novi Sad
Tel: +381 21 63 93 130
www.kuglager.rs

LAGERTON DOO
Serbia, Niš
Tel: +381 18 57 63 62
www.lagerton.com

SET TRADE N&N DOO
Serbia, Zrenjanin
Tel: +381 23 52 34 00
www.setzr.rs

Copyright © 2023 FKL. All rights reserved.
These contents are the copyright of the publisher and may not be reproduced, in total or partially, without express consent of the publisher. Every precautions were taken to ensure the accuracy of the information in this publication but no liability can be accepted for any errors or omissions.
Prepared in Factory of rolling bearings and cardan shafts Temerin, Serbia
Editor in Chief: Ljiljana Marić, B. Sc. Economics and Dejan Zrilić, B. Sc. Economics
Copy Editor: Laslo Koman, B. Sc. Mechanical Enginner; Biljana Obrenović, Master in Mechanical Engineer and Jovan Tomić, B. Sc. Mechanical Enginner
Photos, Layout and Prepress: Monja Madić, Master in Graphic Engineer and Design and Oleg Vorobev, Industrial product designer
Print: MAXIMA Graf, 2023.